

Low Noise Amplifier

27.0 - 31.5 GHz



MAAL-011264

Rev. V1

Features

- Low Noise Figure: 1.6 dB
- Gain: 26 dB
- Bias Voltage: $V_{DD} = 2$ V
- Bias Current: $I_{DSQ} = 12$ mA
- 50 Ω Matched Input and Output
- 2 x 2 mm DFN Package
- RoHS* Compliant

Applications

- Satellite Communications
- Low Earth Orbit Space Payloads
- GEO High Throughput Satellite
- Radar
- EW

Description


The MAAL-011264 is an easy to use low noise amplifier. It operates from 27 to 31.5 GHz and provides 1.6 dB noise figure, 26 dB gain and a P1dB of 1.5 dBm. The input and output are fully matched to 50 Ω with typical return loss >12 dB. This part is packaged in a 2 mm DFN 8-Lead Package.

This product is fabricated using a GaAs pHEMT process which features full passivation for enhanced reliability.

The MAAL-011264 can be used as an ultra-low power dissipation low noise amplifier stage or as a driver stage in higher power applications. This device is ideally suited for Ka-band communication systems.

It is also available in part die form under part number MAAL-011264-DIE.

Functional Schematic

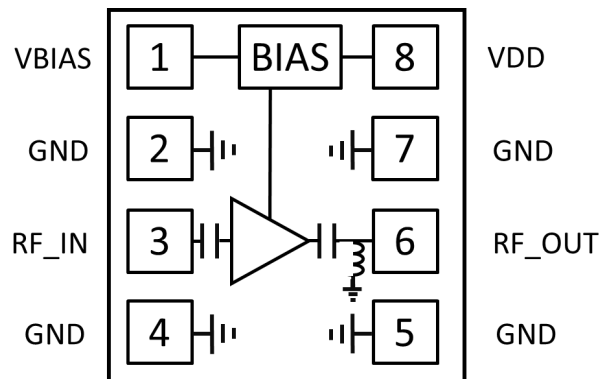

Pin Configuration

Pin #	Function	Description
1	VBIAS	Bias Voltage
2, 4, 5, 7	GND	Ground
3	RF _{IN}	RF Input
6	RF _{OUT}	RF Output
8	VDD	Drain Supply
Paddle ²	GND	Exposed Bottom Pad

2. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.


Ordering Information¹

Part Number	Package
MAAL-011264-TR3000	3000 piece reel
MAAL-011264-SB1	Sample Board

1. Reference Application Note M513 for reel size information.

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Pin Configuration and Functional Description

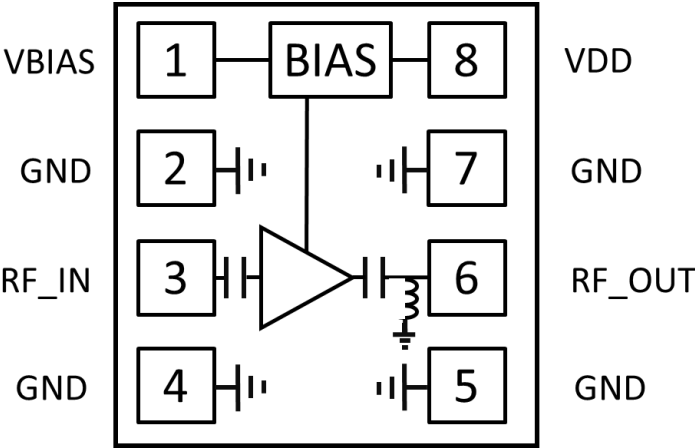

Pin #	Pin Name	Description
1	VBIAS	A voltage can be applied to this pin to set the required IDSQ as described in the application section
2,4,5,7	GND	These pins are grounded internally. It is recommended these are grounded on the application PCB.
3	RF_IN	RF Signal Input. This pad is matched to 50 Ω and is AC coupled
6	RF_OUT	RF Signal Output. This pad is matched to 50 Ω and is AC coupled. There is a shunt inductor to ground providing a DC ground path.
8	VDD	Drain bias for the amplifier. External bypass capacitors are required as described in the applications schematic.
Bottom	Paddle	RF, DC and thermal ground

Electrical Specifications: Freq. = 27.0 - 31.5 GHz, $T_A = 25^\circ\text{C}$, $V_D = +2.0\text{ V}$, $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Small Signal Gain	$P_{IN} = -30\text{ dBm}$ 27.0 GHz 31.5 GHz	dB	24 23	27 27	—
Small Signal Gain Variation over Temperature	—	dB/ $^\circ\text{C}$	—	0.06	—
Gain Flatness	—	dB	—	0.5	—
Noise Figure	—	dB	—	1.6	—
Input Return Loss	—	dB	—	12	—
Output Return Loss	—	dB	—	12	—
P1dB	27.0 GHz 31.5 GHz	dBm	-3 -1	1.5 4	—
Output 3rd Order Intercept	—	dBm	—	10	—
Supply Current	—	mA	—	12	—

Absolute Maximum Ratings^{3,4}

Parameter	Absolute Maximum
Input Power	+18 dBm
Drain Voltage	4.5 V
Junction Temperature ^{5,6}	+165 $^\circ\text{C}$
Operating Temperature	-40 $^\circ\text{C}$ to +85 $^\circ\text{C}$
Storage Temperature	-65 $^\circ\text{C}$ to +125 $^\circ\text{C}$

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. MACOM does not recommend sustained operation near these survivability limits.
5. Operating at nominal conditions with $T_J \leq +150^\circ\text{C}$ will ensure MTTF > 1×10^6 hours.
6. Junction Temperature (T_J) = $T_C + \Theta_{jc} * (V * I)$
Typical thermal resistance (Θ_{jc}) = 100 $^\circ\text{C}/\text{W}$.
 - a) For $T_C = +25^\circ\text{C}$,
 $T_J = 27.4^\circ\text{C}$ @ 2 V, 12 mA
 - b) For $T_C = +85^\circ\text{C}$,
 $T_J = 87.4^\circ\text{C}$ @ 2 V, 12 mA

Maximum Operating Conditions

Parameter	Maximum
TX Input Power	-22 dBm
Drain Voltage	3.5 V
Junction Temperature ^{5,6}	+150 $^\circ\text{C}$
Operating Temperature	-40 $^\circ\text{C}$ to +85 $^\circ\text{C}$


Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1A (250 V), CDM Class C2a (500 V) devices.

Application Schematic

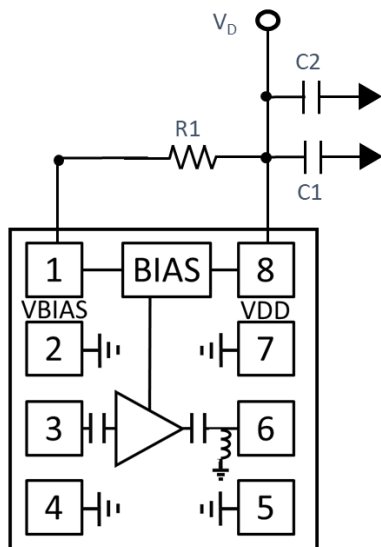

Parts List

Part	Value	Case Style
C1	100 pF	0402
C2	0.1 μ F	0402
R1	-	0402

Application Circuit and Operation

The basic application circuit is shown below. Place C1 capacitor as close to the package as physically possible. The position of the C2 capacitor is not as critical but should also be placed as closely as practically possible.

To ensure proper grounding the number of ground vias under the device should be maximized (within practical limits imposed by the PCB vendor).

Set IDQ by adjusting R1

The value of R1 sets IDQ according to the table below:

R1 (Ω)	IDQ (mA)
6k	6
4.3k	8
2.8k	10
2.25k	12
1.55k	14
1.33k	16
1.1k	18
920	20
800	22
700	24

Operating the MAAL-011264

Turn-on

1. Apply V_D (+2 V)
2. Apply RF_{IN} signal

Turn-off

1. Remove RF_{IN} signal.
2. Decrease V_D to 0 V

Low Noise Amplifier

27.0 - 31.5 GHz




MAAL-011264


Rev. V1

Typical Performance Curves @ $V_D = 2\text{ V}$, $I_D = 25\text{ mA}$, $Z_0 = 50\ \Omega$ over Temperature


Gain

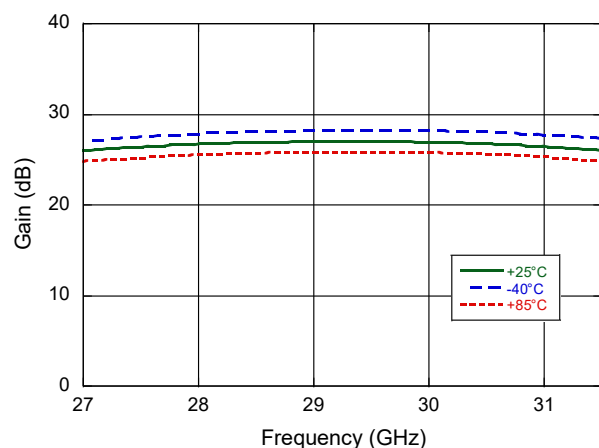

Input Return Loss

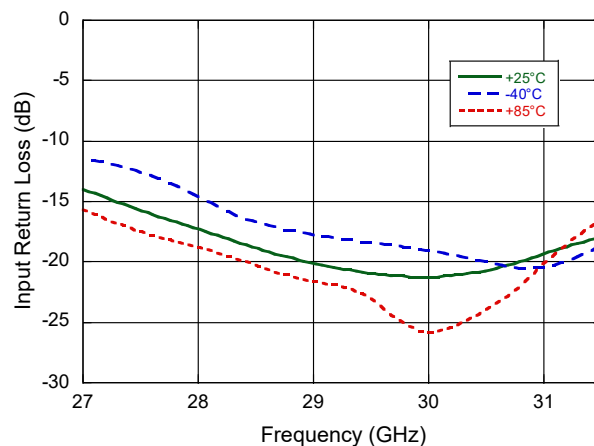

Output Return Loss

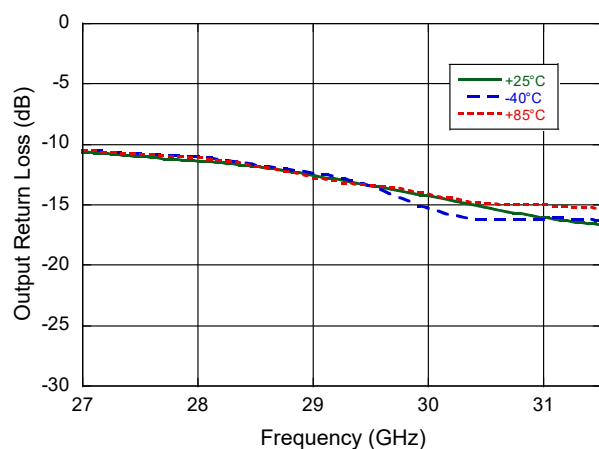

Low Noise Amplifier

27.0 - 31.5 GHz




MAAL-011264


Rev. V1

Typical Performance Curves @ $I_D = 25$ mA, $Z_0 = 50 \Omega$ over Voltage


Gain

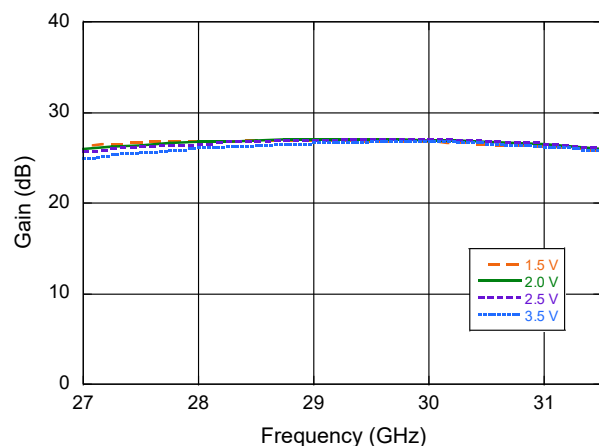

Input Return Loss

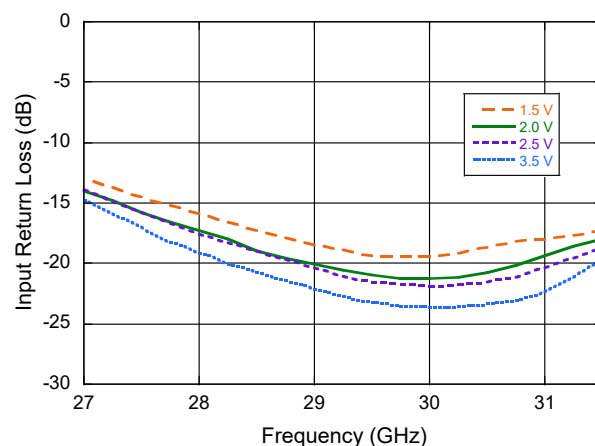

Output Return Loss

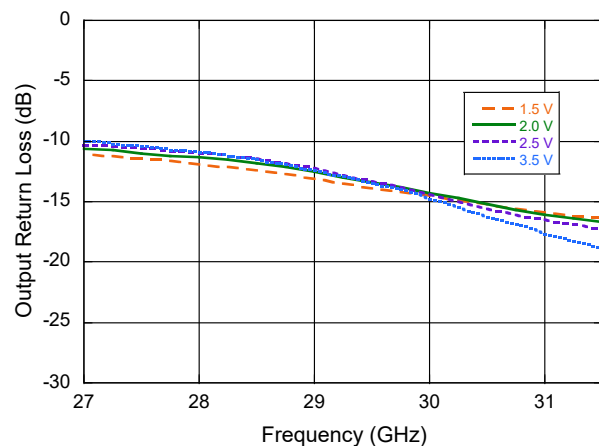

Low Noise Amplifier

27.0 - 31.5 GHz




MAAL-011264


Rev. V1

Typical Performance Curves @ $V_D = 2\text{ V}$, $Z_0 = 50\ \Omega$ over Current


Gain

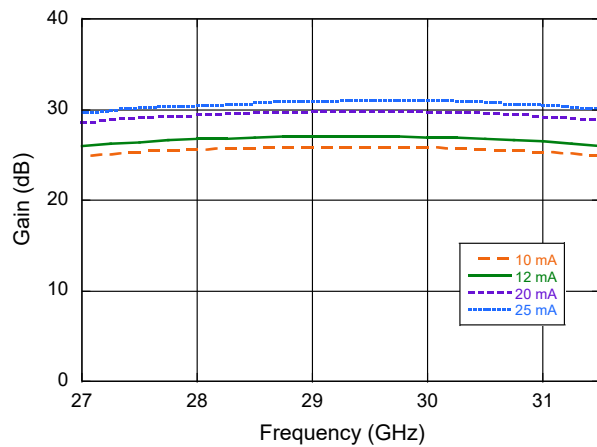

Input Return Loss

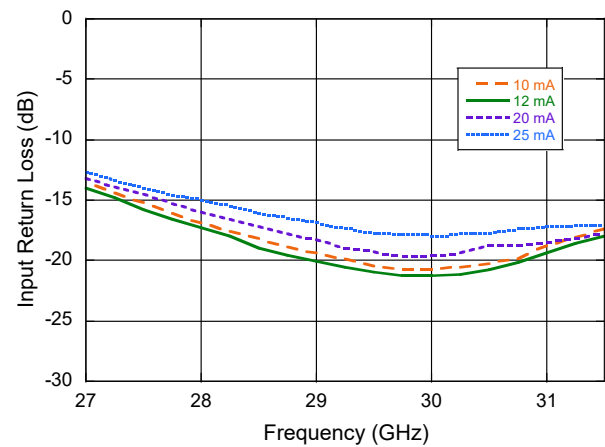

Output Return Loss

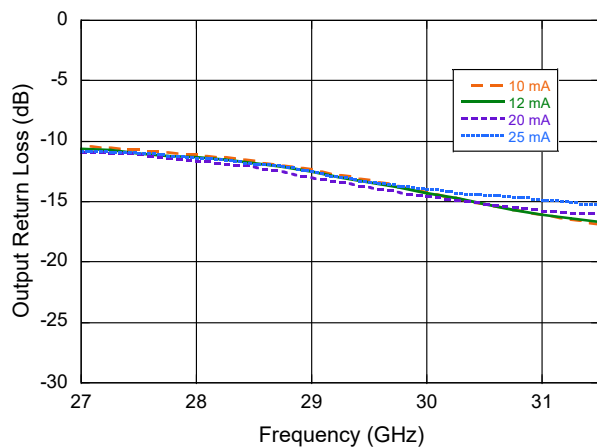

Low Noise Amplifier

27.0 - 31.5 GHz




MAAL-011264


Rev. V1

Typical Performance Curves @ $V_D = 2\text{ V}$, $I_D = 25\text{ mA}$, 25°C , $Z_0 = 50\ \Omega$


Noise Figure over Temperature

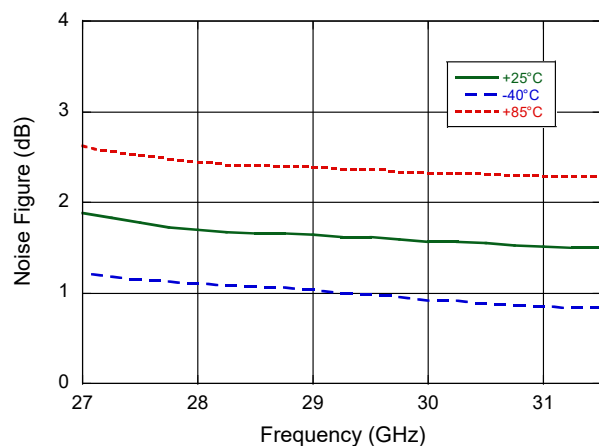

Noise Figure over Voltage

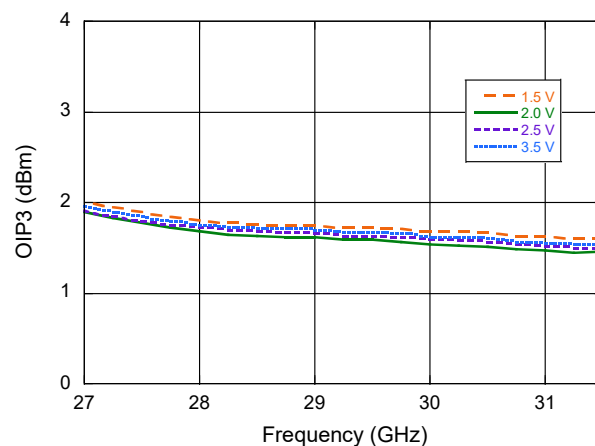

Noise Figure over Current

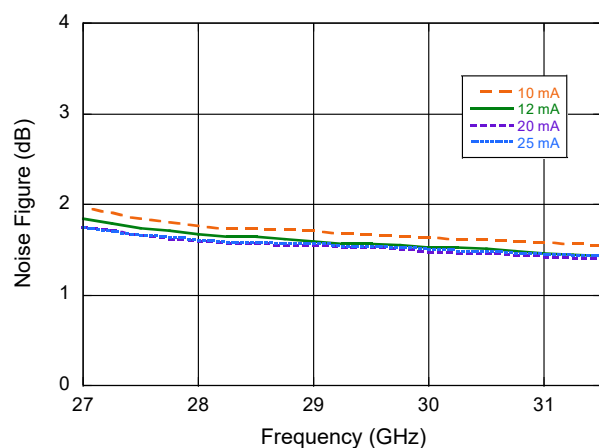

Low Noise Amplifier

27.0 - 31.5 GHz




MAAL-011264


Rev. V1

Typical Performance Curves @ $V_D = 2\text{ V}$, $I_D = 25\text{ mA}$, $P_{IN} = -30\text{ dBm}$, 25°C , $Z_0 = 50\ \Omega$


OIP3 over Temperature

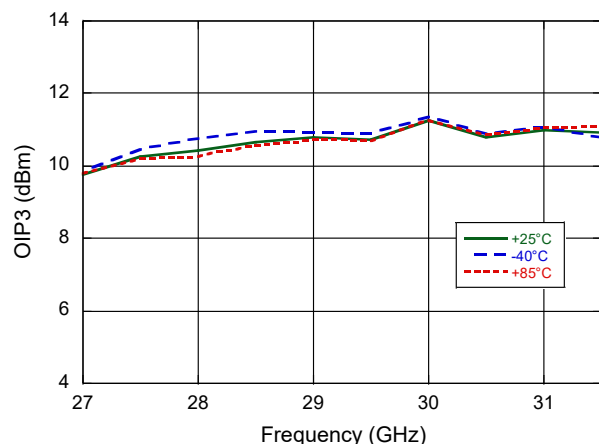


OIP3 over Input Power

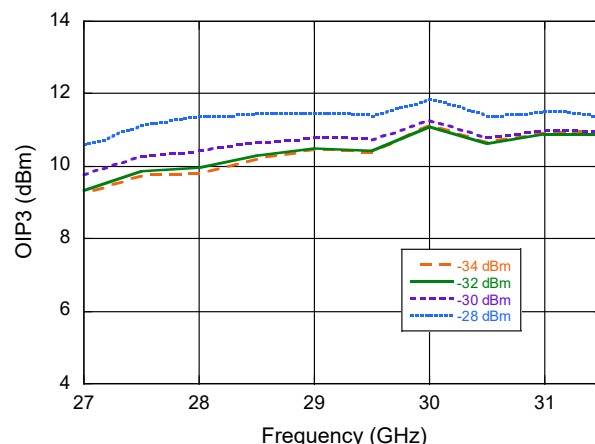


OIP3 over Bias Voltage

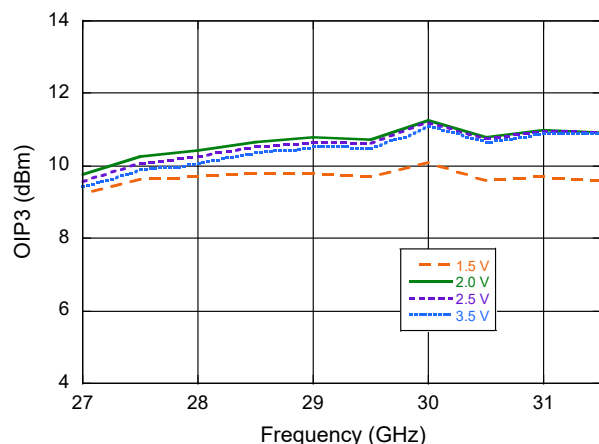


OIP3 over Bias Current

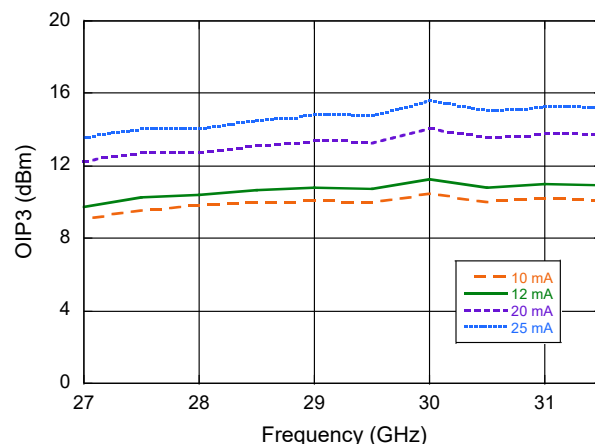

Bias Current vs Output Power over Frequency

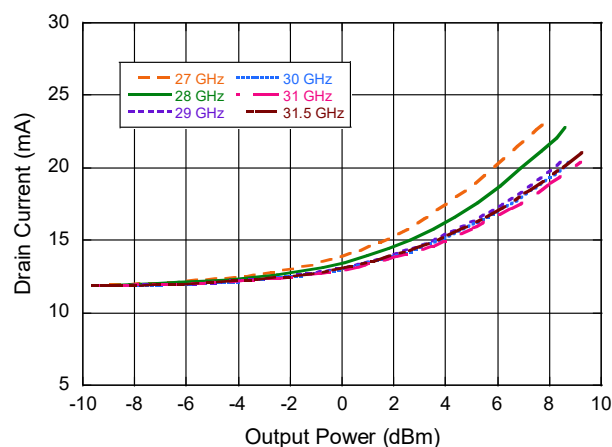

Gain vs Output Power over Frequency

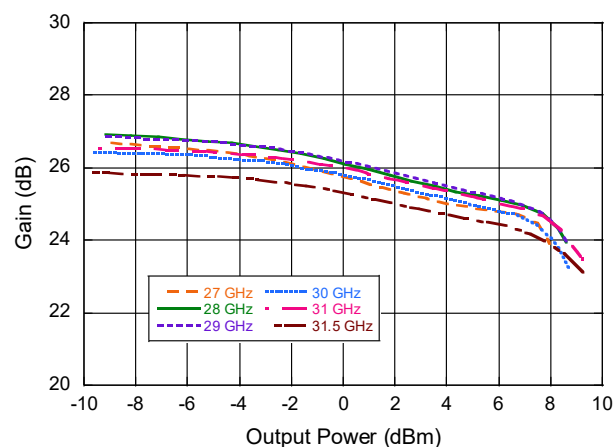

Low Noise Amplifier

27.0 - 31.5 GHz




MAAL-011264


Rev. V1

Typical Performance Curves @ $V_D = 2\text{ V}$, $I_D = 25\text{ mA}$, 25°C , $Z_0 = 50\ \Omega$


P1dB over Temperature

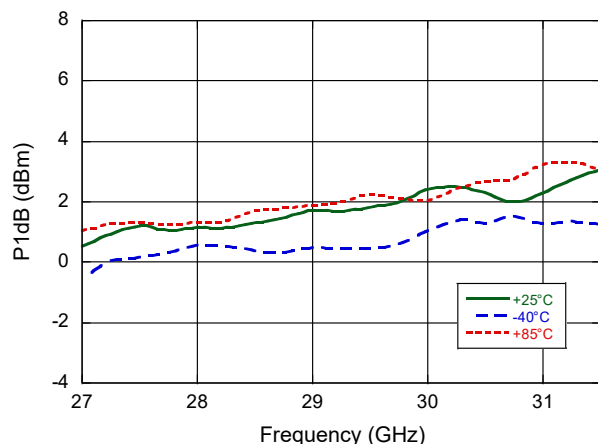


P3dB over Temperature

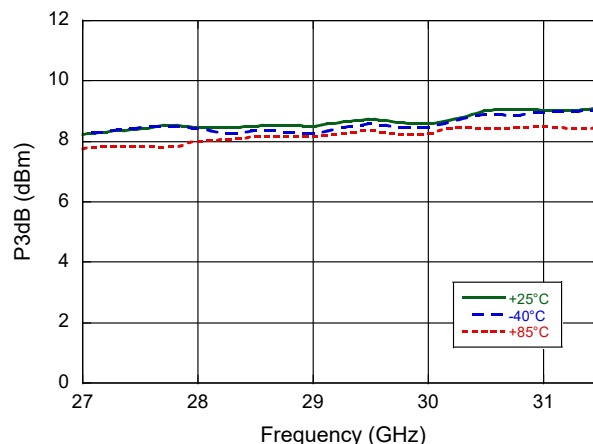


P1dB over Bias Voltage

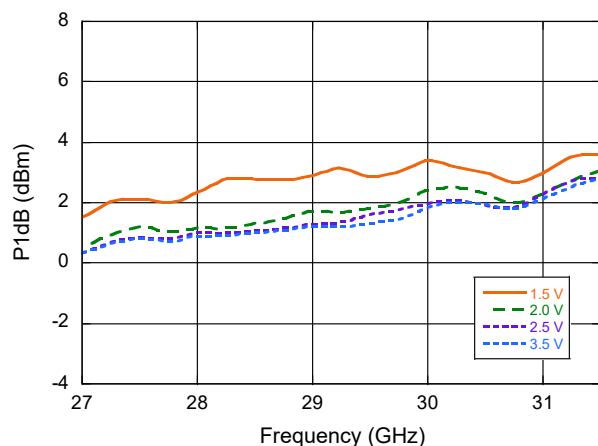


P3dB over Bias Voltage

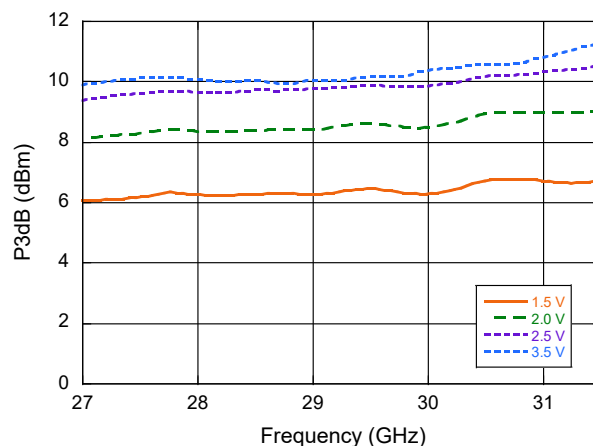

P1dB over Bias Current

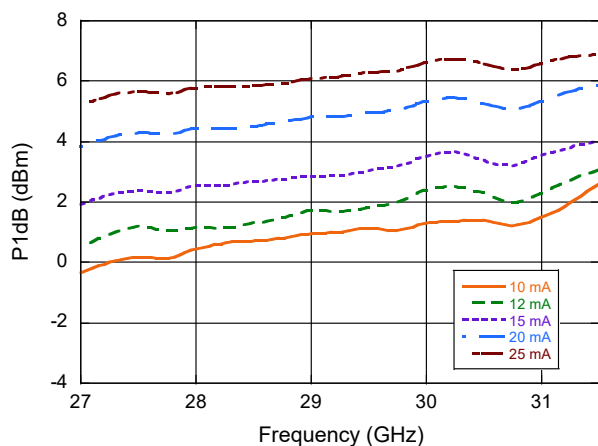

P3dB over Bias Current

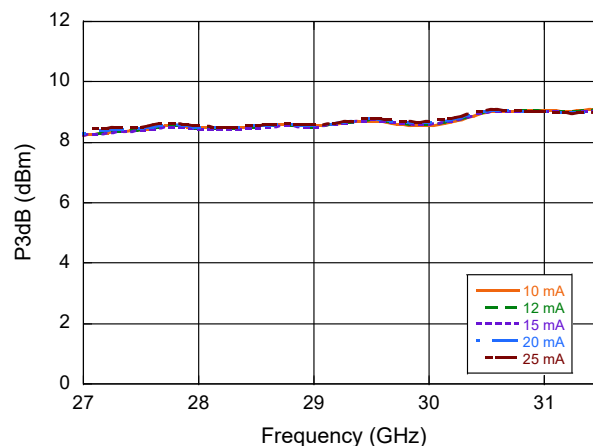

Low Noise Amplifier


27.0 - 31.5 GHz



MAAL-011264

Rev. V1

Lead-Free 2 mm TDFN 8-Lead SMT

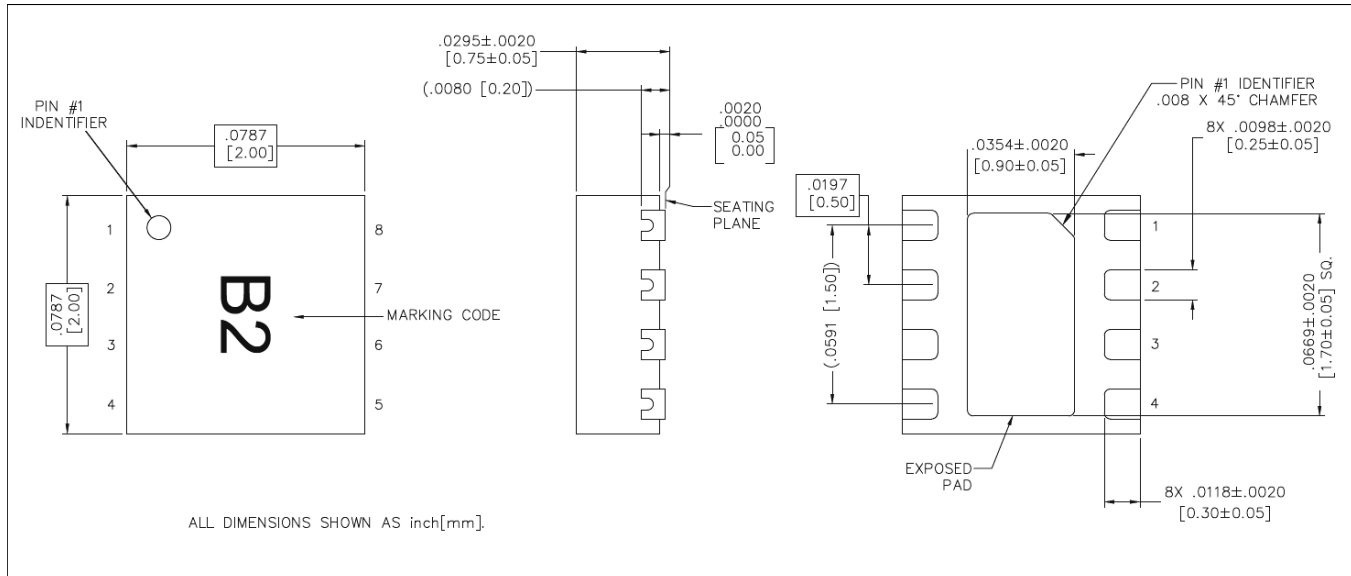

Lead finish: NiPdAuAg plating
 Reference Application Note S2083 for lead-free solder reflow recommendations.
 Meets JEDEC moisture sensitivity level 1 requirements.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.