

Wideband Power Divider, Packaged 2 - 18 GHz



ENGPD00014-SM

Rev. V1

Features

- Wideband Performance
- Excellent Return Loss: 16 dB
- RF Power Handling: 27 dBm
- Excellent Balance
- Small Size:
 - 5 x 5 x 1.27 mm
 - 0.197 x 0.197 x 0.050 inch
- RoHS* Compliant


Applications

- Space Hybrids
- Military Hybrids
- Microwave Radios
- Test & Measurement Systems

Description

The ENGPD00014-SM is a two-way, in-phase Wilkinson-style power splitter / combiner. The device is optimized for performance from 2 to 18 GHz and has a usable bandwidth from 1 to 20 GHz. The device offers excellent return loss, high isolation, and small size. It has excellent amplitude and phase balance. The power splitter is packaged in a 5 mm QFN suitable for SMT solder attach to a PCB. The power splitter can handle up to a half watt RF input power levels.

Functional Schematic

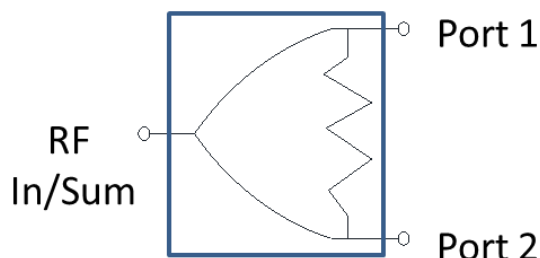

Ordering Information

Part Number	Package
ENGPD00014-SM	bulk

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Wideband Power Divider, Packaged 2 - 18 GHz



ENGP00014-SM

Rev. V1

Electrical Specifications: Freq. = 2 - 18 GHz, $T_A = +25^\circ\text{C}$

Parameter	Units	Min.	Typ.	Max.
Insertion Loss	dB	0.4	1.0	2.0
Input Return Loss	dB	12	16	—
Output Return Loss	dB	12	16	—
Isolation	dB	12	16	—
Amplitude Balance	dB	—	+0.1 / -0.1	+0.2/-0.2
Phase Balance	Deg	—	+1.0 / -1.0	+3.5 / -3.5
Power Handling	dBm	—	—	27

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
RF Input Power	28 dBm
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +150°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Wideband Power Divider, Packaged 2 - 18 GHz




ENGP00014-SM

Rev. V1

Typical Performance Curves

RF Insertion Loss & Isolation Between Output Ports

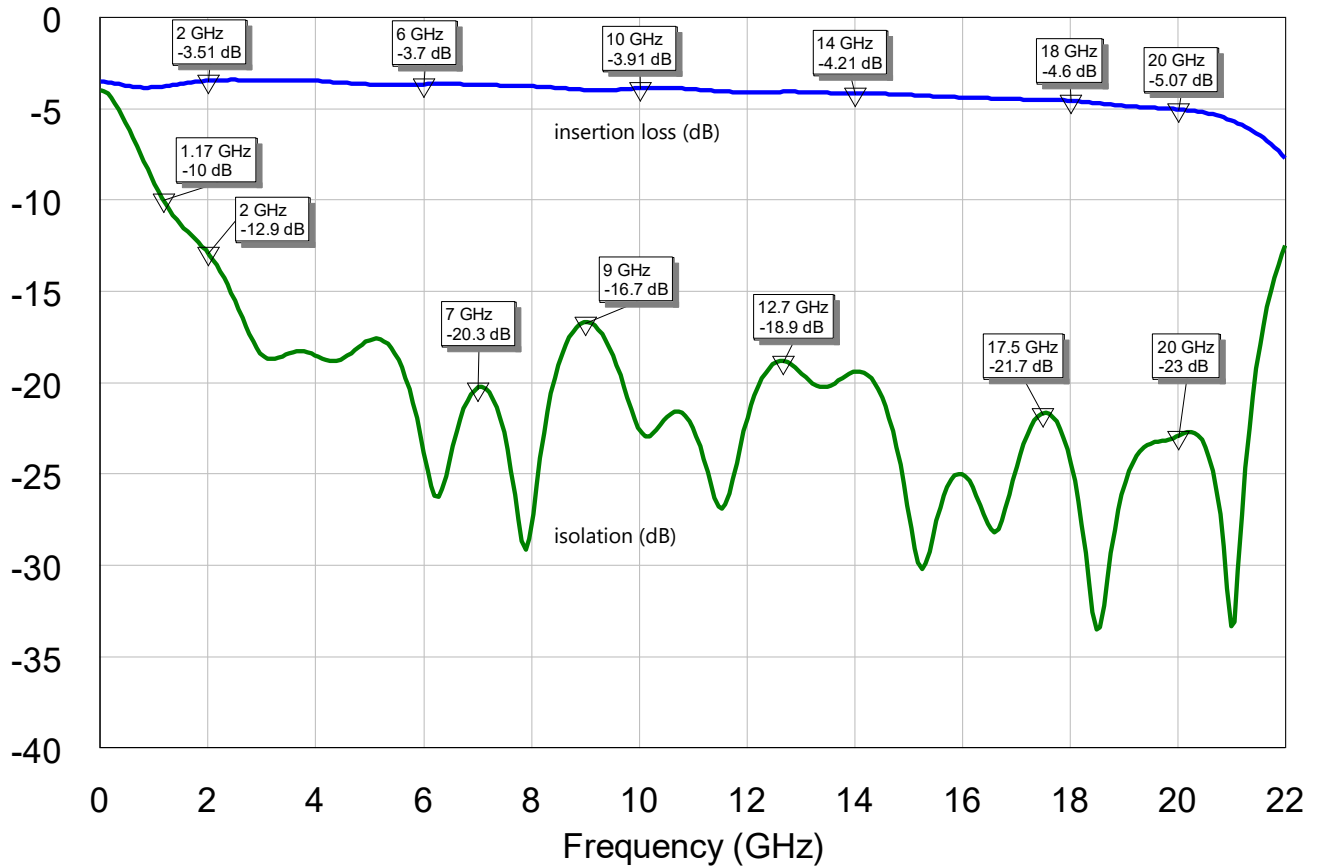

Wideband Power Divider, Packaged 2 - 18 GHz




ENGP00014-SM

Rev. V1


Typical Performance Curves

RF Insertion Loss & In and Out Return Loss

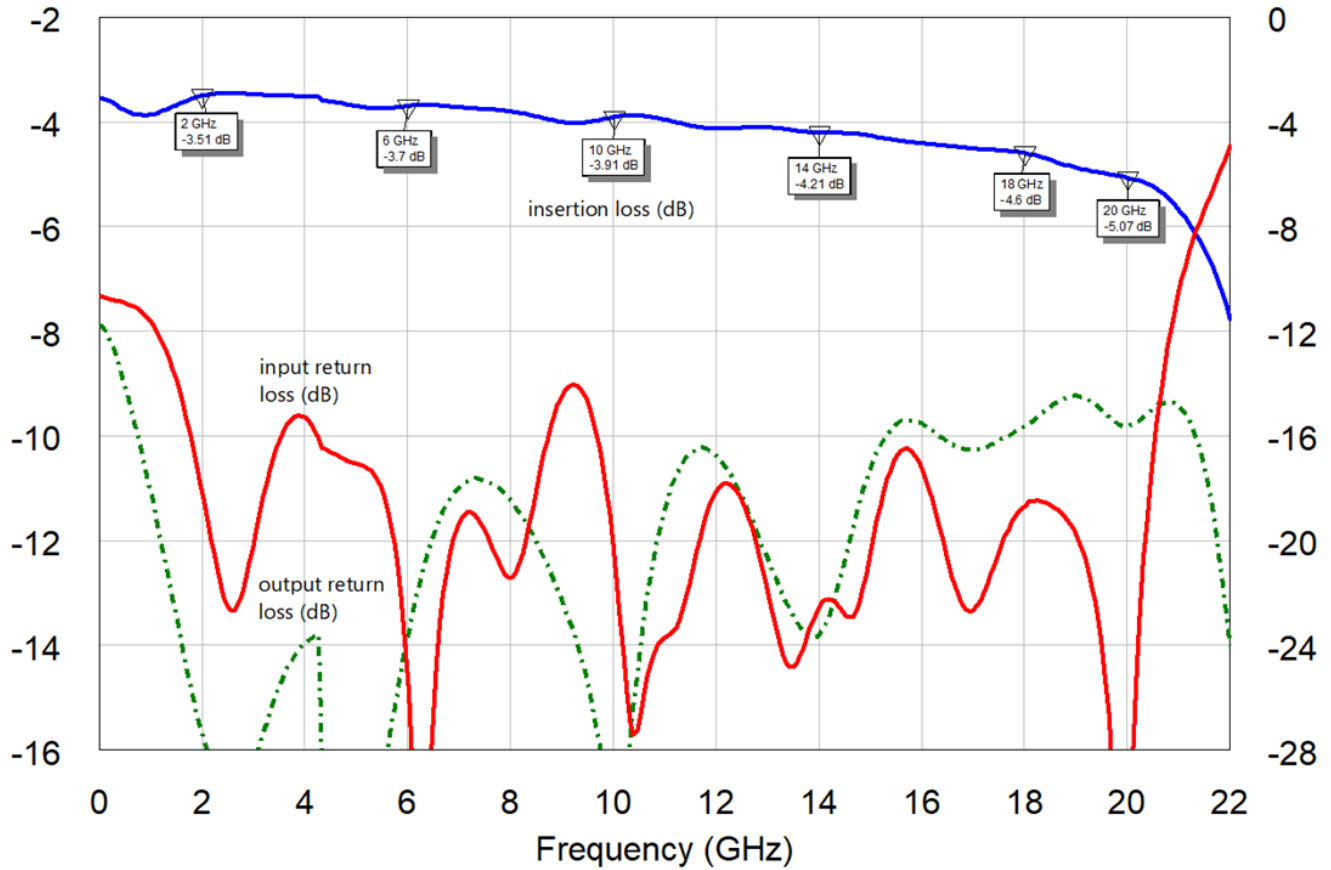


Typical Performance Curves

Amplitude Balance Between Output Ports

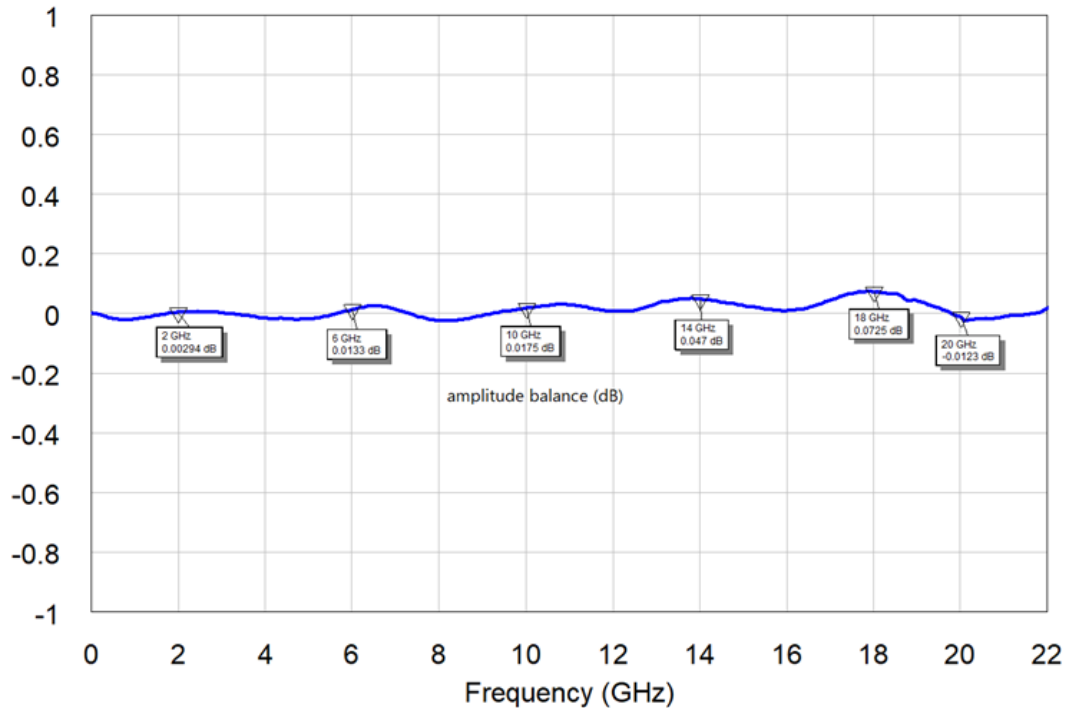

Phase Balance Between Output Ports

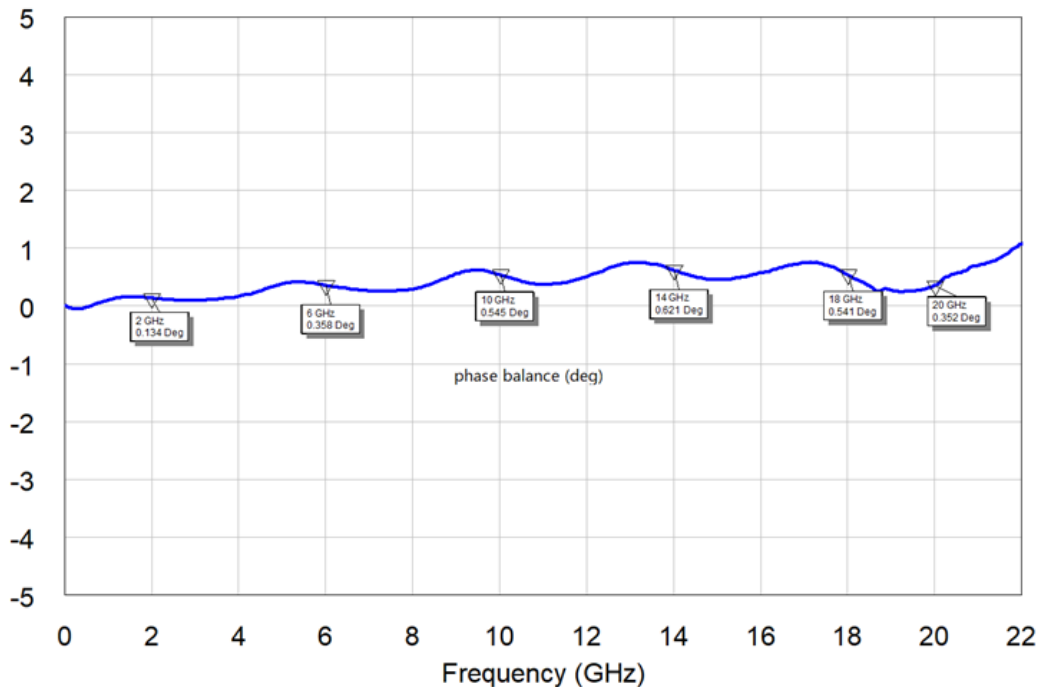


Wideband Power Divider, Packaged 2 - 18 GHz




ENGP00014-SM

Rev. V1

Recommended Copper Layer 1 with 0.006" DK 3 Dielectric

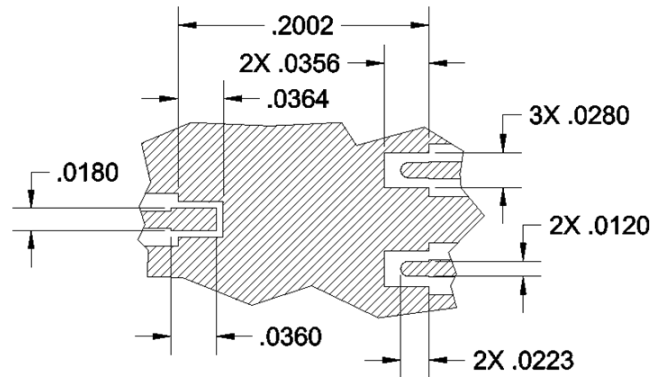

Outline Drawing

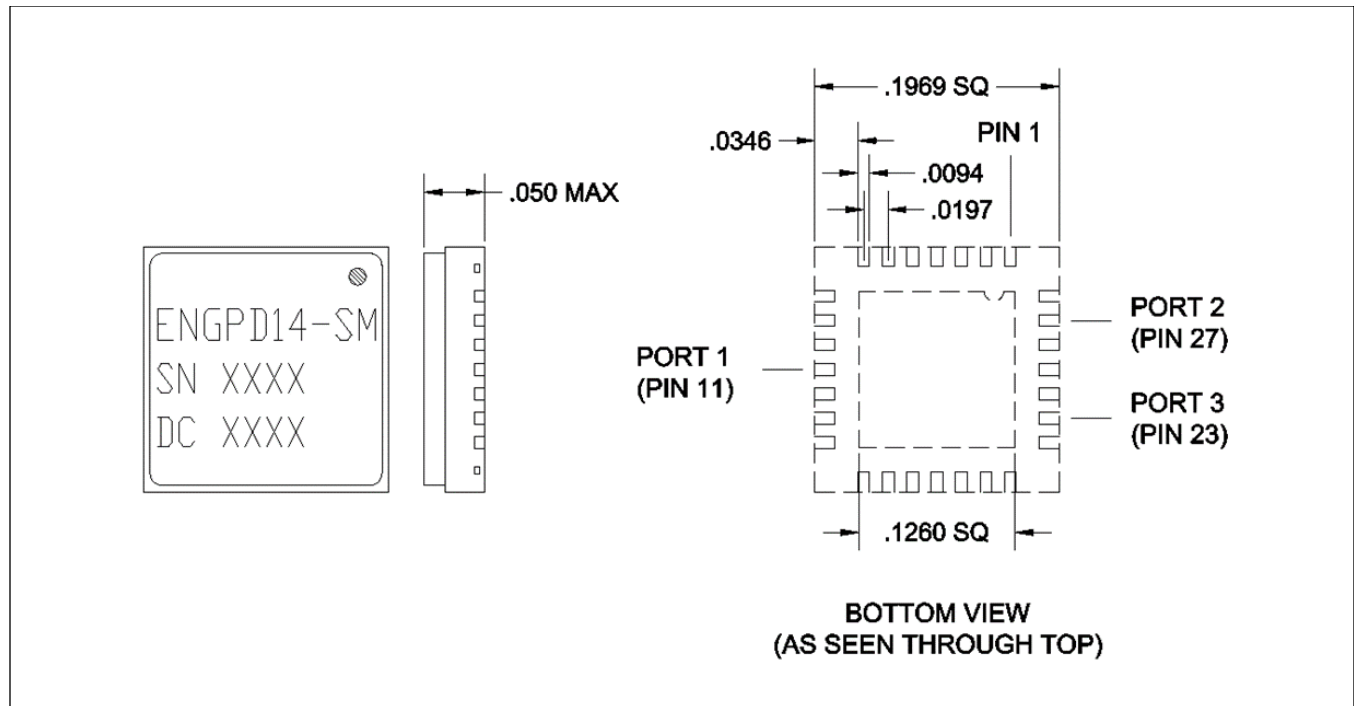

All dimensions are given in inches.
View of package footprint as seen from top through part.
Lead finish is nickel gold.
Connect all unused pads and center paddle to ground plane.

Wideband Power Divider, Packaged 2 - 18 GHz



ENGPD00014-SM

Rev. V1

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.