

1:1 Flux Coupled Transformer 5 - 100 MHz

Rev. V2

Features


- 1:1 Impedance
- Surface Mount Package
- CT on Secondary
- 75 Ω
- RoHS Compliant

Description

The MABA-008124-CF1FA0 is a 1:1 RF flux coupled transformer in a surface mount package.

Ideally suited for high volume CATV application.

Schematic

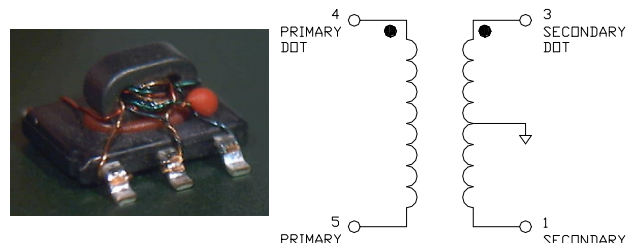

Pin Configuration

Pin #	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

Electrical Specifications: Freq. = 5 - 100 MHz, $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	5 - 100 MHz	dB	—	0.7	1.0
Amplitude Balance	5 - 100 MHz	dB	—	± 0.0	± 0.25
Phase Balance (ref value 180°)	5 - 100 MHz	°	—	± 0.3	± 4.0
Input Return Loss	5 - 75 MHz 75 - 100 MHz	dB	17 15	25 21	—

Ordering Information

Part #	Package
MABA-008124-CF1FA0	900 pieces per reel
MABA-008124-CF1FTB	Customer test board


Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +75°C
Storage Temperature	-40°C to +85°C


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

Typical Performance: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$


Insertion Loss 1

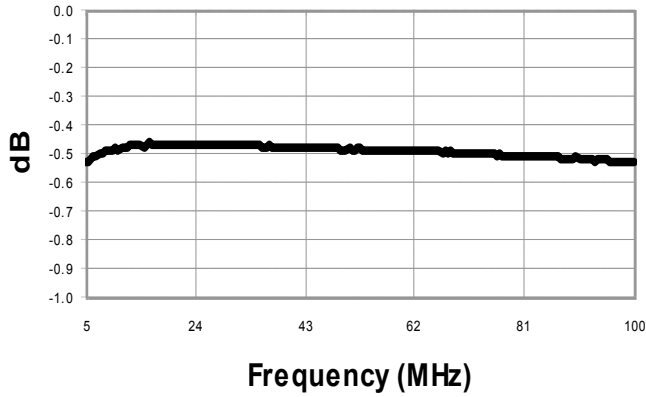


Insertion Loss 2

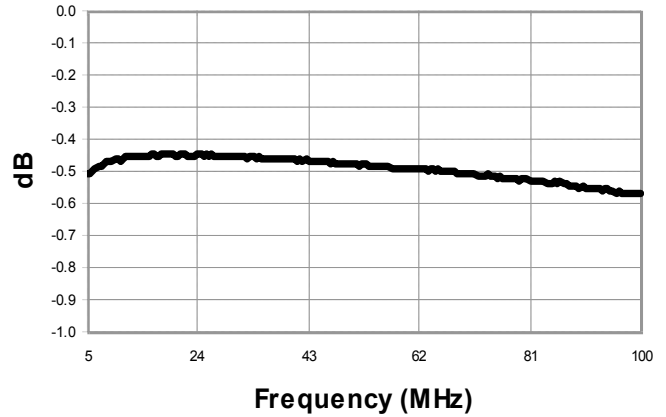


Amplitude Balance

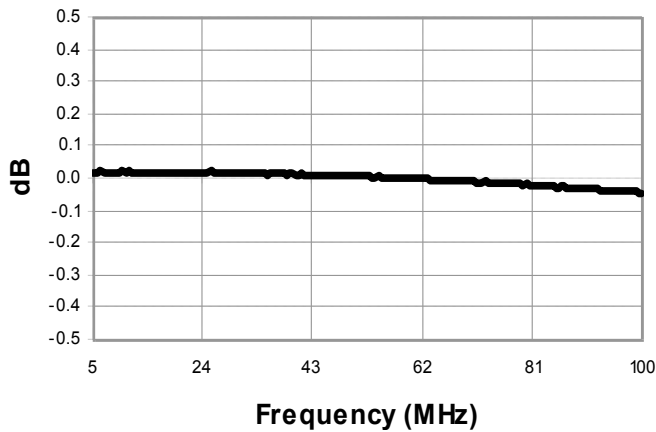


Phase Balance

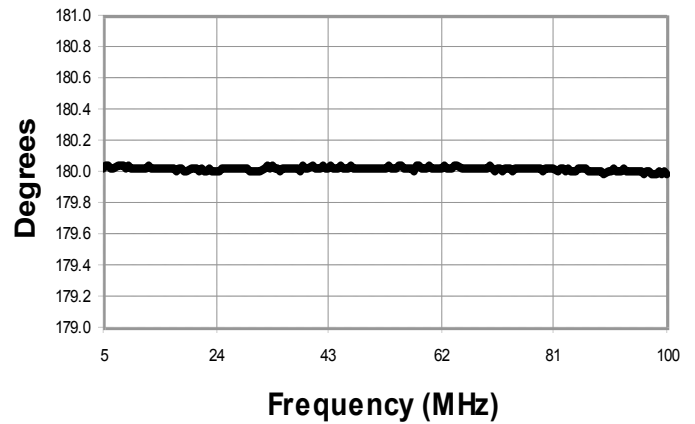

Return Loss: Input

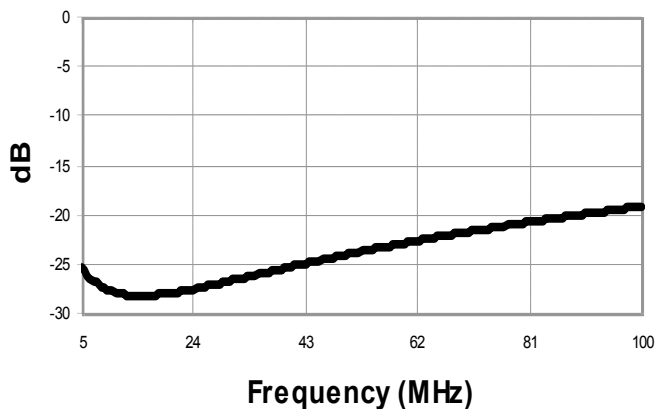

Outline Drawing (SM-250-5)

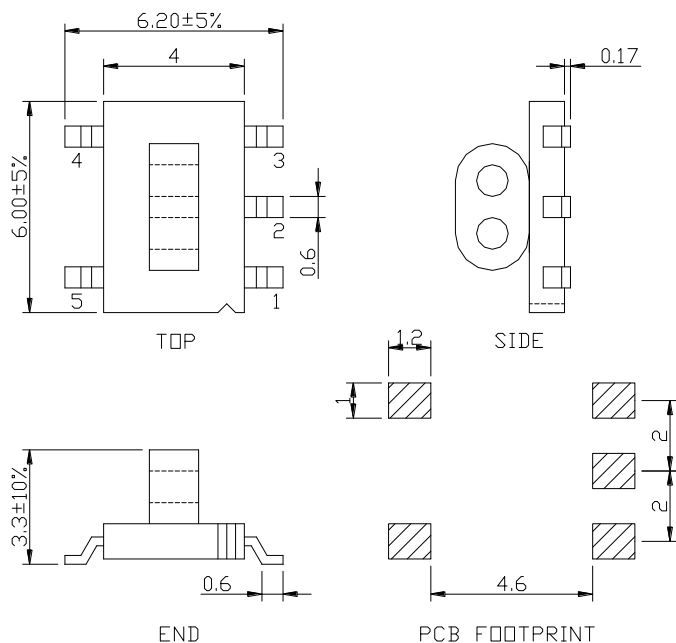

Dimensions in inches [mm] Tolerance: .xx \pm .02, .xxx \pm .010,
 Except where otherwise stated.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.