

V2

### 1:1 Transmission Line Transformer

### 4.5 - 3000 MHz

### **Features**

- Surface mount
- Wide frequency range
- 1:1 impedance
- 260°C reflow compatible
- RoHS Compliant, lead-free
- Excellent temperature stability
- Available on tape and reel




### **Electrical Specifications:** $Z_0 = 50\Omega$ , $T_A = 25$ °C, $P_{in} = 0$ dBm

Parameter	Conditions	Units	Min	Тур	Max
Frequency Range		MHz	4.5		3000
Impedance		Ω		50	
Impedance Ratio				1:1	
Insertion Loss 1 (Pin2 - Pin3)	4.5 - 1000 1001 - 2000 2001 - 3000	dB dB dB	- - -	0.1 0.7 1.5	1.0 2.0 -
Insertion Loss 2 (Pin2 - Pin5)	4.5 - 1000 1001 - 2000 2001 - 3000	dB dB dB	- - -	0.6 0.5 1.0	1.0 2.0 -
Amplitude Balance	4.5 - 1800 1801 - 3000	dB dB	-	0.2 0.6	1.0 1.5
Phase Balance	4.5 - 2800 2801 - 3000	Degrees Degrees	-	2.5 11.0	20 25

# **Pin Configuration**

Pin No.	Function	
1	Primary	
2	Primary Dot	
3	Secondary Dot	
4	Not Connected	
5	Secondary	

### **Schematic**

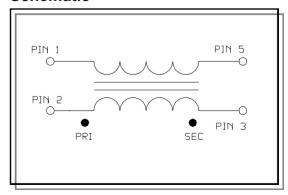


1





### 1:1 Transmission Line Transformer


### 4.5 - 3000 MHz


V2

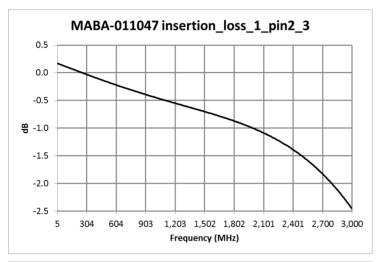


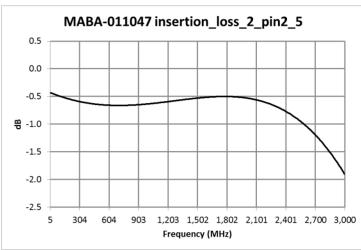

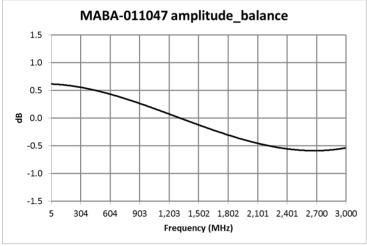

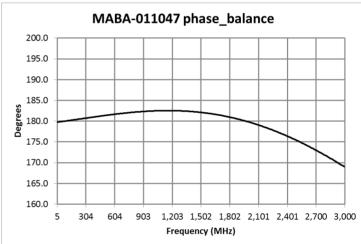

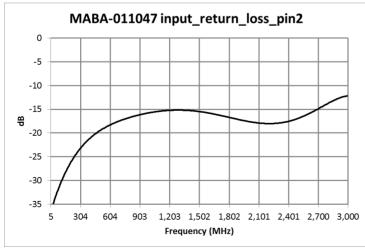

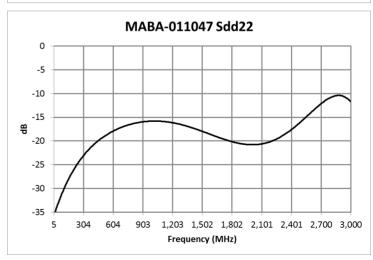

Electrical Specifications:  $Z_0 = 50\Omega$ ,  $T_A = 25$ °C,  $P_{in} = 0$ dBm




### 1:1 Transmission Line Transformer

### 4.5 - 3000 MHz


#### V2

### **Outline Drawing**

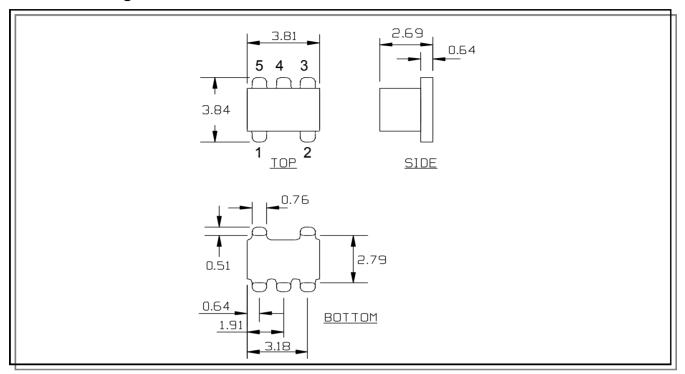


- 1. Dimensions in mm.
- 2. Tolerance: ±0.2mm unless otherwise noted.
- 3. Model number and lot code are printed on the reel.
- 4. Finish: Electroless nickel immersion gold (ENIG)

# **Application circuit**

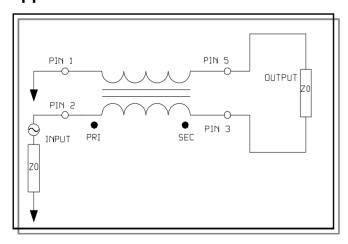

# **Recommended Footprint**

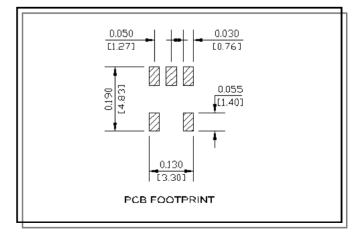



# 1:1 Transmission Line Transformer

4.5 - 3000 MHz

### **Tape & Reel Information**

Parameter	Units	Value		
Qty per reel	-	2000		
Reel Size	mm	330		
Tape Width	mm	12.00		
Pitch	mm	8.00		
Ao	mm	4.00		
Во	mm	4.00		
Ko	mm	2.90		
Orientation	-	F5		
Reference Application Note ANI-019 for orientation				

### **Ordering Information**

Part Number	Description		
MABA-011047	Tape & Reel		
MABA-011047-TB	Customer Test Board		

### **Recommended Maximum Ratings**

Parameter	Units	Min	Max
Input Power	mW		250
DC Current	mA		30
Operating Temperature Range	°C	-40	+85

Full temperature plots available on request

# MABA-011047



1:1 Transmission Line Transformer

4.5 - 3000 MHz

#### M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.