

## Features


- High Power Switching Diode
- Low Loss, Low Distortion Design
- Rugged, Hermetically Sealed Packaging
- Threaded Stud Attachment
- Non Magnetic to 3 Tesla for MRI Applications
- RoHS\* Compliant

## Applications

- Filter Switches
- Antenna Couplers
- Power Amplifier By-pass Switches
- MRI Switches

## Description

The MA4P4006-1041 PIN diode utilize modern semiconductor and packaging technology that assures low loss, low distortion, and reliable performance in switch applications at frequencies as low as 1 MHz. The semiconductor technology utilized in this design draws on MACOM's substantial experience in PIN diode design and wafer fabrication. The result is a device which has a thick I-region and long carrier lifetime while maintaining low series resistance and capacitance values.



ODS-1041

## Packaging

The metal-ceramic package used for this diode design was developed specifically for high voltage/high power hermetic applications. The PIN diode chip is eutectically bonded to the package using gold/tin high temperature solder. The anode connection is ribbon bonded to ensure a robust attachment to the anode contact and the package flange. The package is sealed using a projection welding technique in an inert environment. This package meets the environmental requirements of MIL-STD-202 and MIL-STD750.

## Ordering Information

Part Number	Package Style
MA4P4006-1041	Pill Package/Threaded Stud

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

**Electrical Specifications @  $T_A = 25^\circ\text{C}$** 

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Reverse Voltage	1 $\mu\text{A}$	V	—	—	900
Series Resistance	F = 120 MHz, I = 0.2 A I = 0.3 A	$\Omega$	—	—	0.20 0.15
Total Capacitance	F = 1 MHz, V = 200 V	pF	—	—	2
Carrier Lifetime	$I_F = 10\text{ mA}$ , $I_R = 6\text{ mA}$	$\mu\text{s}$	15	—	—
Forward Voltage	$I_F = 0.1\text{ A}$	V	—	—	0.9
Thermal Resistance	—	$^\circ\text{C/W}$	—	—	6
I-Region Width (Nom.)	—	$\mu\text{m}$	—	175	—

**Absolute Maximum Ratings**

Parameter	Absolute Maximum
Instantaneous Reverse Voltage	Voltage Rating
Forward Current (RF & DC)	5 A
Power Dissipation $T_C = +25^\circ\text{C}$	$(T_J - T_C)/R_{TH}$
Operating Junction Temperature	$-55^\circ\text{C}$ to $+175^\circ\text{C}$
Storage Temperature	$-65^\circ\text{C}$ to $+175^\circ\text{C}$
Installation Temperature	$250^\circ\text{C}/30\text{ Seconds}$


**Handling Procedures**

Please observe the following precautions to avoid damage:

**Static Sensitivity**

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 1C, HBM devices.

Outline (ODS-1041)

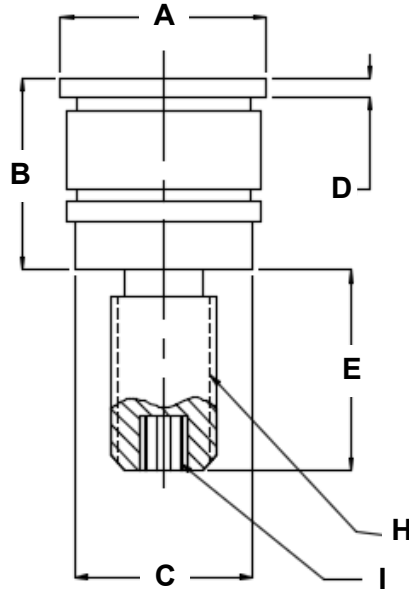

Black Dot Denotes Cathode

Dim.	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	0.264	0.274	6.71	6.96
B	0.186	0.204	4.72	5.81
C	0.247	0.253	6.27	6.48
D	0.022	0.030	0.56	0.76
E	0.249	0.267	6.32	6.78
H	6-40 UNF-3A			
I	0.072 SPLINE X 0.070 DP			

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.