

High IIP3 AlGaAs PIN Diode Series / Shunt Switch Element



MADP-011201 Series

Rev. V1

Features

- Cost Effective Choice for Switch Applications
- Broadband Performance up to 3 GHz
- IIP3: 80 dBm
- Low Insertion Loss: 0.25 dB
- Supports Power up to 2 W (DFN-0402) or 3 W (DFN-2012)
- Small Size
 - DFN-0402 = 40 x 24 mils
 - DFN-2012 = 1.9 x 1.1 mm
- RoHS* Compliant

Applications



- Wireless Telecommunications Infrastructure & Test Instrument Applications

Description



The MADP-011201 is a high linearity, medium power AlGaAs PIN diode element offered in a Lead-free, surface mount plastic package. The Series Switch Configuration has a body size of 40 x 24 mils, while the Shunt Switch Configuration has a body size of 1.9 x 1.1 mm.

This AlGaAs PIN diode is designed for wireless telecommunications infrastructure & test instrument applications. It is also well suited for other applications in 0.1~ 3.0 GHz.

Pin Out / Schematic



(0402)



(2012)

Pin Configuration (2012)¹

Pin #	Pin Name	Description
1	RF _{IN}	RF Input
2	RF _{OUT}	RF Output
3	Paddle ²	Ground

1. MACOM recommends connecting unused package pins to ground.
2. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

Ordering Information

Part Number	Packaging
MADP-011201-0402P	1,000 pc Reel
MADP-011201-2012	1,000 pc Reel

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Electrical Specifications: $T_A = +25^\circ\text{C}$


Parameter	Test Conditions	Min.	Typ.	Max.	Units
Breakdown Voltage (V_B)	$I_R = 10\ \mu\text{A}$	150	—	—	V
Forward Voltage (V_F)	$I_F = 50\ \text{mA}$	—	1.4	1.5	V
Total Capacitance (C_T)	$V_R = -50\ \text{V}$, 1 MHz	—	0.20	0.26	pF
Series Resistance (R_S)	$I_F = 10\ \text{mA}$, 100 MHz	—	1.5	—	Ω
Minority Carrier Lifetime (T_L)	$I_F = 10\ \text{mA}$, $I_R = 6\ \text{mA}$ @ 90% Recovery	—	80	—	ns

Absolute Maximum Ratings^{3,4}


Parameter	Absolute Maximum
Breakdown Voltage	150 V
Forward Current	100 mA
Thermal Resistance	58°C/W
Junction Temperature	$+175^\circ\text{C}$
Storage Temperature	-65°C to $+150^\circ\text{C}$
Assembly Temperature	$+260^\circ\text{C}$, Per JEDEC STD-J-20C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. MACOM does not recommend sustained operation near these survivability limits.

(0402)

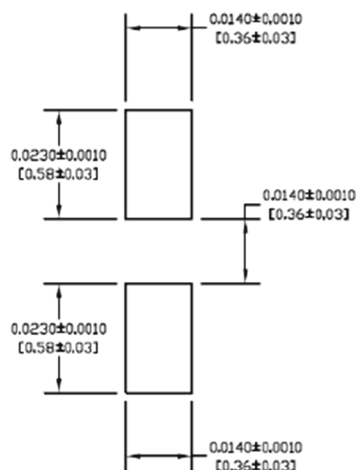

(2012)

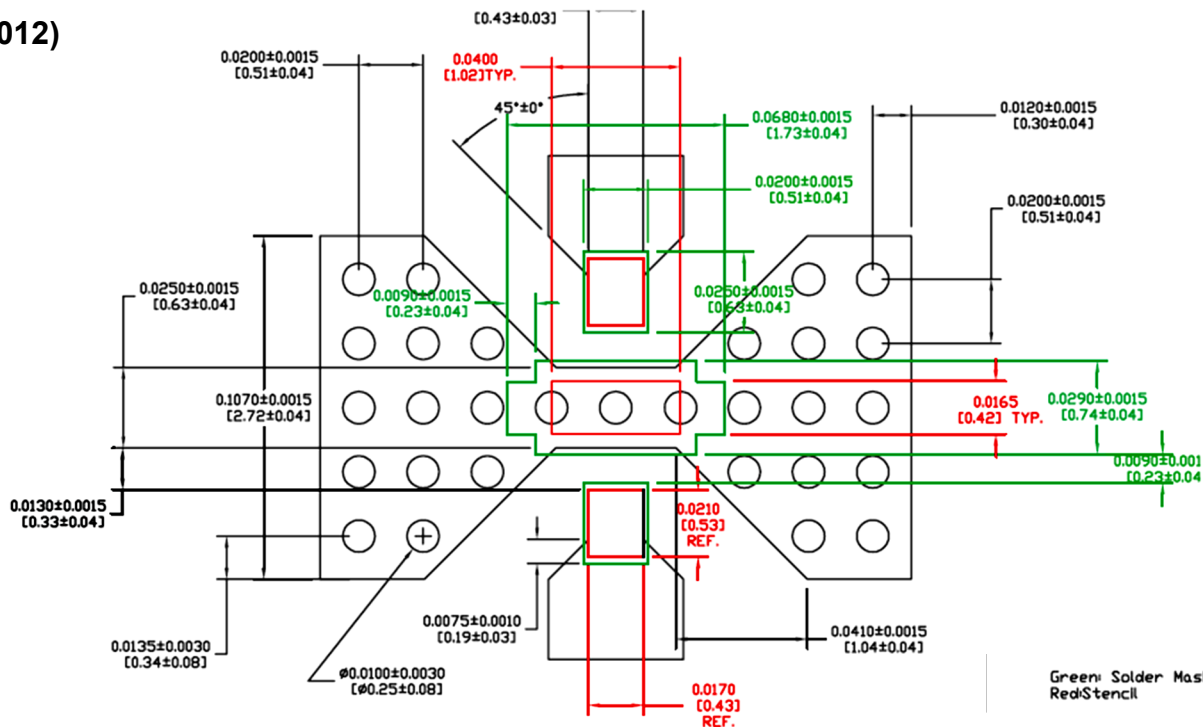


Solder mask should provide a 60 um clearance between copper pad and solder mask. Rounded pkg pads should have matching rounded solder mask openings.


- 3 Use circles or squares for the thermal land stencil such that only get 50% to 80% solder paste coverage.

DC-0037368

Outline (0402)

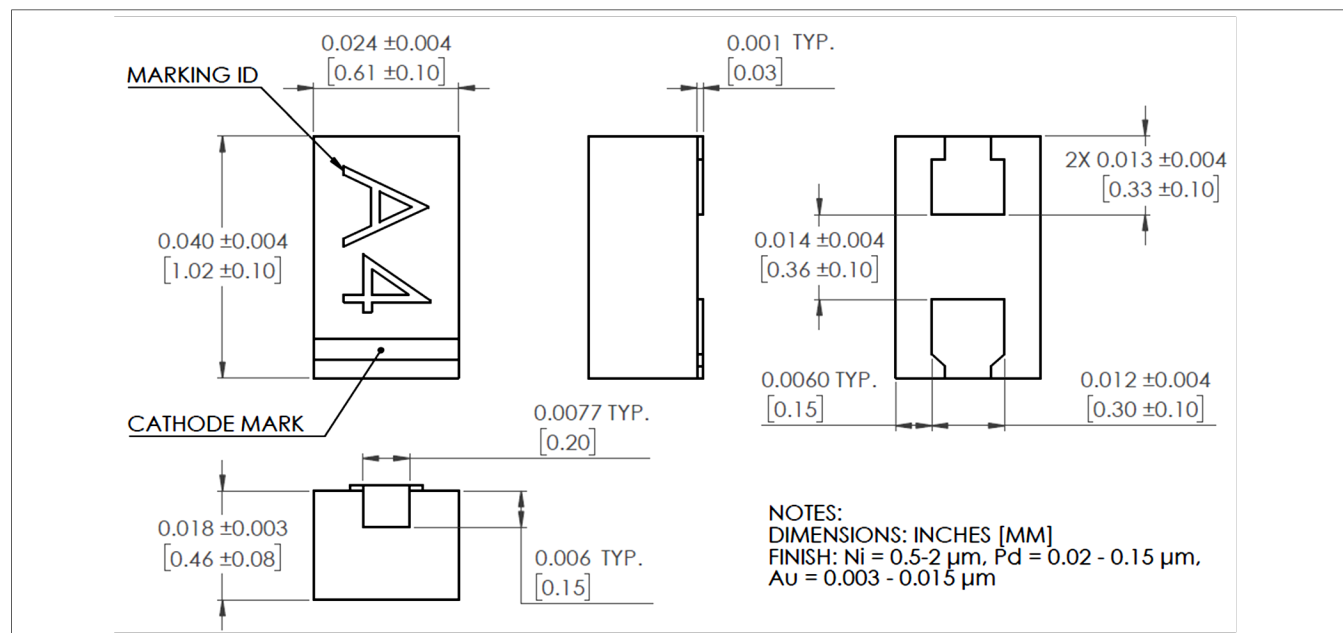

Outline (2012)

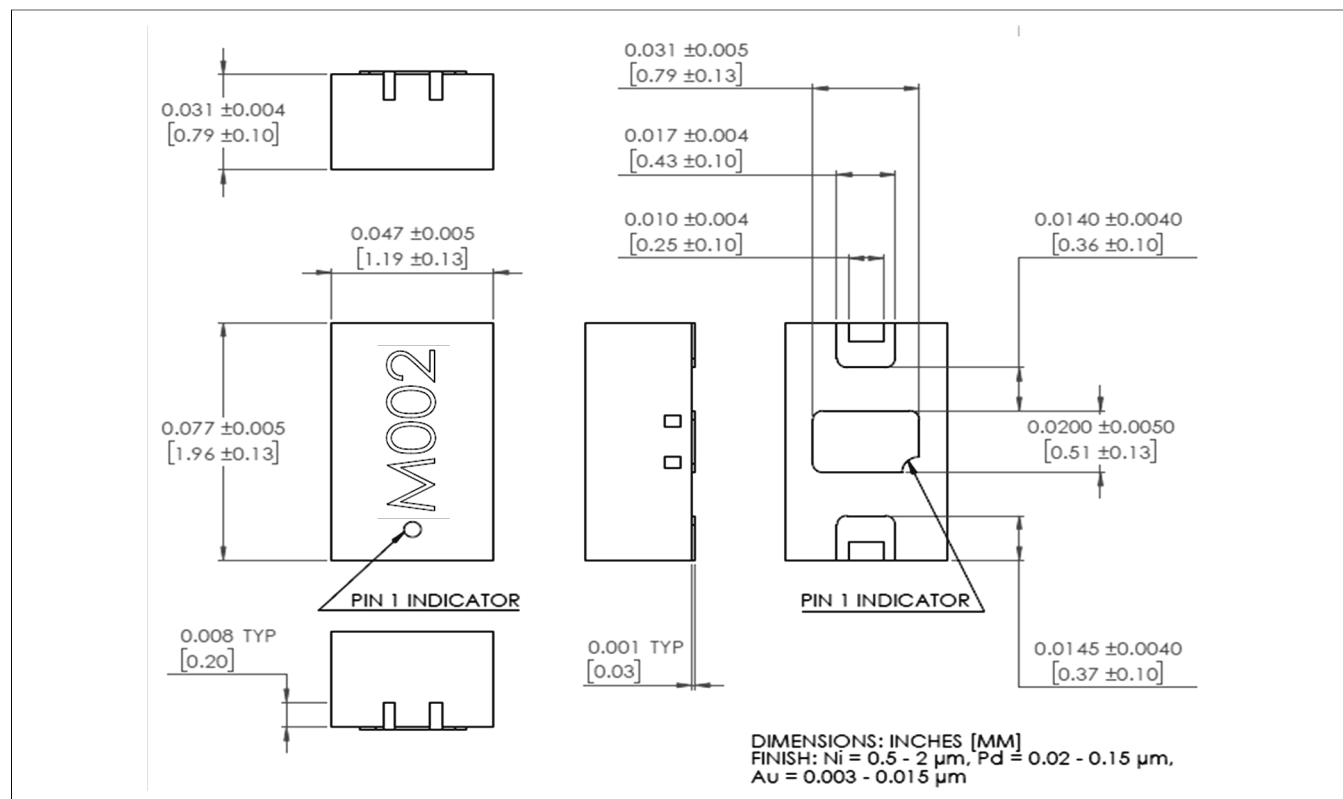

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.