

CATV Diplex Filter 5 - 42 / 52 - 1000MHz


Rev. V3

Features

- 75 Ohm
- SMT unit
- · Low Cost, Low Profile
- RoHS* Compliant

Description


M/A-COM's MAFL-009511-CD0A10 is a low cost, low profile diplex filter designed for use in CATV settop-box, cable modem and D-PON applications.



Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum		
RF Power	250mW		
DC Current	30mA		
Operating Temperature	-40°C to +85°C		
Storage Temperature	-40°C to +85°C		

Functional Schematic



Pin configuration

Function	Pin Number			
Common Port	5			
Low Pass Port	10			
Output Port	20			
Ground	1-4, 6-9, 11-19			
Not connected	-			

Ordering Information

Part Number	Package	
MAFL-009511-CD0A10	900	

1

Exceeding any one or combination of these limits may cause permanent damage to this device.

M/A-COM does not recommend sustained operation near these survivability limits.


^{*} Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.



CATV Diplex Filter 5 - 42 / 52 - 1000MHz


Rev. V3

SM-161 Case Style

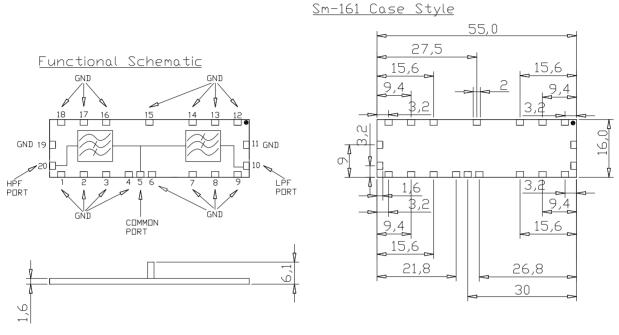

Dimensions in mm. Tolerance: $.x \pm 0.1, .xx \pm 0.05$ Maximum coplanarity specification of 0.1mm

Recommended PCB Configuration

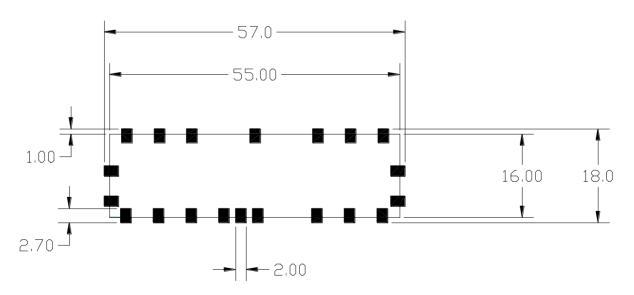

Dimensions in mm. Tolerance: $.x \pm 0.1$, $.xx \pm 0.05$

MAFL-009511-CD0A10



CATV Diplex Filter 5 - 42 / 52 - 1000MHz

Rev. V3

Electrical Specifications: $T_A = 25$ °C, $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min	Тур	Max
Frequency Range	5 - 42MHz / 52 - 1000MHz				
Insertion Loss	5 - 42MHz	dB	-	-0.5	-1.1
Insertion Loss	52 - 60MHz 60 - 1000MHz	dB dB	-	-1.1 -0.5	-1.3 -1.1
Filter Isolation	5 - 39.5MHz 39.5 - 42MHz	dB dB	-55 -48	-62 -55	-
Filter Isolation	52 - 60MHz 60 - 500MHz 500 - 860MHz 860 - 1000MHz	dB dB db dB	-50 -55 -50 -45	-55 -58 -55 -50	- - -
Input Return Loss	5 - 42MHz	dB	-14	-17	-
Input Return Loss	52 - 64MHz 64 - 74MHz 74 - 650MHz 650 - 1000MHz	dB dB dB dB	-10 -12 -15 -14	-14 -16 -20 -16	- - -




CATV Diplex Filter 5 - 42 / 52 - 1000MHz


Rev. V3

Typical Performance Curves


Input Return Loss




Filter Isolation



Low Pass Filter Insertion Loss



High Pass Filter Insertion Loss



MAFL-009511-CD0A10



CATV Diplex Filter 5 - 42 / 52 - 1000MHz

Rev. V3

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.