

# MoCA Low Pass Filter 5 - 1550 MHz

Rev. V6


#### **Features**

- 75 Ω
- Surface Mount Technology
- RoHS\* Compliant & Lead-Free

### **Description**

The MAFL-010412-CL0AD0 is a surface mount low pass filter unit designed for MoCA applications.

### **Functional Schematic**



## **Pin Configuration**

Pin#	Function	Pin#	Function
1, 2, 4 - 7	Ground	8	Input Port
3	Low Pass Port		

## Electrical Specifications: $T_A = 25$ °C, $P_{IN} = 0$ dBm, $Z_0 = 75$ $\Omega$

Parameter	Test Conditions Frequency (MHz)	Units	Min	Тур	Max
Insertion Loss	5 - 42 42 - 860 860 - 1002	dB	_	0.05 0.5 1.5	0.15 0.8 1.7
Rejection	1130 - 1550	dB	35	37	_
Input Port Return Loss	5 - 600 600 - 950 950 - 1002	dB	13 11 12	16 14 14	_
Common Port Voltage Transient	_	V	_	_	200

## **Ordering Information**

Part Number	Package	
MAFL-010412-CL0AD0	500 piece reel	

## **Absolute Maximum Ratings**<sup>1,2</sup>

Parameter	Absolute Maximum	
RF Power	250 mW	
DC Current	200 mA	
Operating Temperature	-40°C to +85°C	
Storage Temperature	-55°C to +125°C	

- 1. Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit <a href="https://www.macom.com">www.macom.com</a> for additional data sheets and product information.

<sup>\*</sup> Restrictions on Hazardous Substances, compliant to current RoHS EU directive.




MoCA Low Pass Filter 5 - 1550 MHz


Rev. V6

## **Typical Performance Curves**

#### Insertion Loss

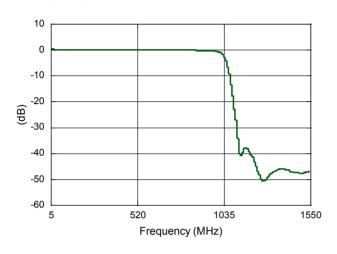

#### Return Loss

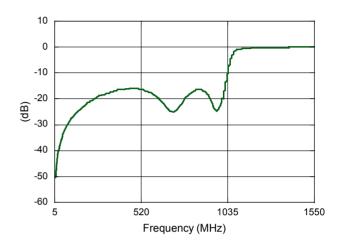




MoCA Low Pass Filter 5 - 1550 MHz


Rev. V6

### **Recommended PCB Configuration**


- Track dimension = 1.1 mm
- Gap dimension = 1.2 mm
- It is not recommended to run tracks under the filter unless they are greater than 1.6 mm below the base.
- Ground should be 1.6 mm below the base of the filter
- Area directly under the filter should be free from copper
- RF shield should be kept a minimum of 6 mm above the filter



 $\label{eq:copper}$  Dimensions in mm. Tolerance: .x  $\pm$  0.1, unless otherwise specified

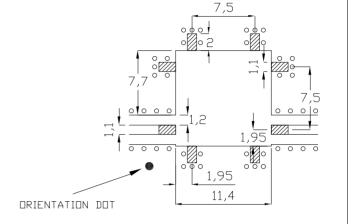

## **Component Dimensions (SM-173)**

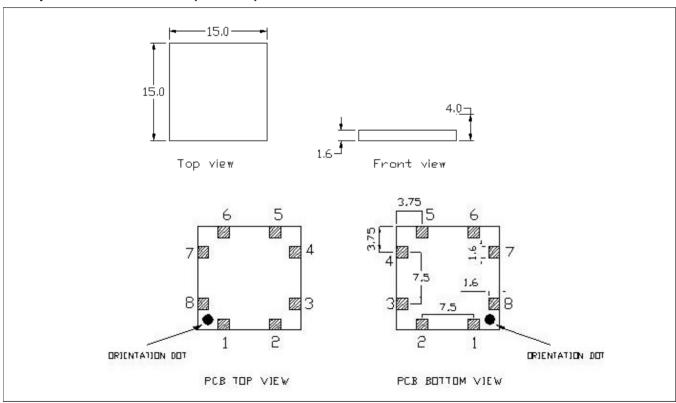




MoCA Low Pass Filter 5 - 1550 MHz

Rev. V6

## **Tape & Reel Information**

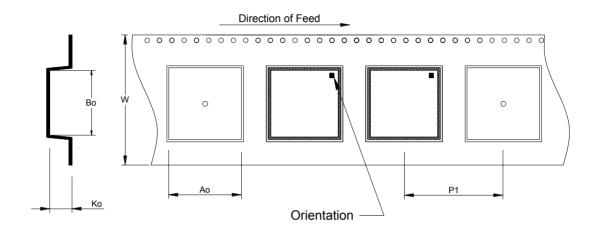

Parameter	Units	Value		
Reel Size	mm	330		
Tape Width	mm	32.00		
Pitch	mm	20.00		
Ao	mm	15.30		
Во	mm	15.30		
Ko	mm	3.70		
Orientation	-	F20		
Reference Application Note ANI-019 for orientation				



MoCA Low Pass Filter 5 - 1550 MHz

Rev. V6

### MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.