

# Digital Attenuator 1-Bit, 10 dB

## DC - 30 GHz



MAAD-011057

Rev. V1

### Features

- 1 Bit Digital Attenuator
- Low Insertion Loss: 1 dB
- Attenuation: 10 dB
- Impedance: 50  $\Omega$
- 2 mm, 8 lead PDFN Package
- RoHS\* Compliant

### Applications

- Telecom Infrastructure
- Fiber Optics
- Phase Array Radars, Sensors
- Test Instruments
- Microwave Radio & VSAT
- General Purpose

### Description

The MAAD-011057 is a broadband bidirectional, 1-bit GaAs (pHEMT) digital step attenuator of 10 dB step size. Complementary 0 V and -5 V logic input is necessary to change the attenuators states from insertion loss to attenuation.

The MAAD-011057 is part of a series of single bit digital attenuators covering the same frequency range and having the same physical size:


MAAD-011053: 2 dB

MAAD-011054: 4 dB

MAAD-011055: 6 dB

MAAD-011056: 8 dB

### Functional Schematic

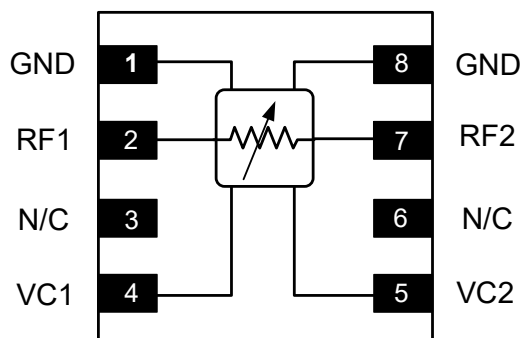

### Pin Names<sup>2,3</sup>

Pin #	Function
1,8	GND
2,7	RF <sub>IN/OUT</sub>
3,6	N/C
4	VC1
5	VC2

2. MACOM recommends connecting unused package pins to ground.

3. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

### Ordering Information<sup>1</sup>

Part Number	Package
MAAD-011057-TR1000	1000 piece reel
MAAD-011057-TR3000	3000 piece reel
MAAD-011057-SMB	Sample Board

1. Reference Application Note M513 for reel size information.

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

# Digital Attenuator 1-Bit, 10 dB

## DC - 30 GHz



MAAD-011057

Rev. V1

### Pin Description<sup>4</sup>

Pin #	Name	Description
1,8	GND	Ground
2	RF <sub>1</sub>	RF Input/Output, DC coupled
3,6	N/C	No Connection, MACOM recommends connecting to ground
4	VC1	Control Voltage 1
5	VC2	Control Voltage 2
7	RF <sub>2</sub>	RF Input/Output, DC coupled

4. The RF ports are DC coupled and will be at approximately 0Vdc, with 0V / -5V controls applied. External DC blocking capacitors are required on any RF ports that will have a DC potential present from the external circuit.

# Digital Attenuator 1-Bit, 10 dB DC - 30 GHz



MAAD-011057

Rev. V1

## RF Electrical Specifications: Freq. = DC - 30 GHz, $T_C = 25^\circ\text{C}$ , $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	6 GHz 18 GHz 30 GHz	dB	—	1.0 1.3 2.0	1.8 2.0 —
Attenuation	6 GHz 18 GHz 30 GHz	dB	9.2 8.7 7.0	10.6 9.9 8.8	11.8 11.4 10.1
Return Losses	RF Input RF Output	dB	—	15 15	—
Input IP3	Two-tone, 10 MHz, +5 dBm	dBm	—	40	—
$T_{\text{RISE}}$ $T_{\text{FALL}}$	10% RF to 90% RF 90% RF to 10% RF	ns	—	10 35	—
$T_{\text{ON}}$ $T_{\text{OFF}}$	50% Control to 90% RF 50% Control to 10% RF	ns	—	15 40	—

## DC Electrical Specifications: $T_C = 25^\circ\text{C}$ , $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
VC1, VC2	Low-level Input Voltage High-level Input Voltage	V	-5.5 -0.2	-5.0 0	-3.0 +0.2
$I_{VC}$ (Input Control Currents)	$V_C = -5\ \text{V}$ or $0\ \text{V}$	$\mu\text{A}$	—	1	—

### Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Input Power	$RF_{IN}$	dBm	—	—	27
Control Voltage	VC1/VC2	V	-5.5	—	+0.2
Junction Temperature	$T_J$	°C	—	—	+150
Operating Temperature <sup>5</sup>	$T_C$	°C	-40	—	+85

5.  $T_C$  is defined as the exposed paddle temperature.

### Absolute Maximum Ratings<sup>6,7</sup>

Parameter	Symbol	Unit	Min	Max
Input Power	$RF_{IN}$	dBm	—	30
Control Voltage	VC1/VC2	V	-6.0	+0.5
Junction Temperature <sup>8,9</sup>	$T_J$	°C	—	+160
Storage Temperature	-	°C	-65	+150

6. Exceeding any one or combination of these limits may cause permanent damage to this device.

7. MACOM does not recommend sustained operation near these survivability limits.

8. Operating at nominal conditions with  $T_J \leq +160^\circ\text{C}$  will ensure MTTF >  $1 \times 10^6$  hours.

9. Junction Temperature ( $T_J$ ) =  $(P_{OUT} - P_{IN}) * \theta_{jc} + T_C$   
Typical thermal resistance ( $\theta_{jc}$ ) =  $68.2^\circ\text{C/W}$ .

### Truth Table<sup>10</sup>

VC1	VC2	Attenuation
0	1	Insertion Loss
1	0	10 dB

10. "0" = -5 V; "1" = 0 V.

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1A and CDM Class C3 devices.

# Digital Attenuator 1-Bit, 10 dB DC - 30 GHz




MAAD-011057


Rev. V1

## Typical Performance Curves


**Insertion Loss**

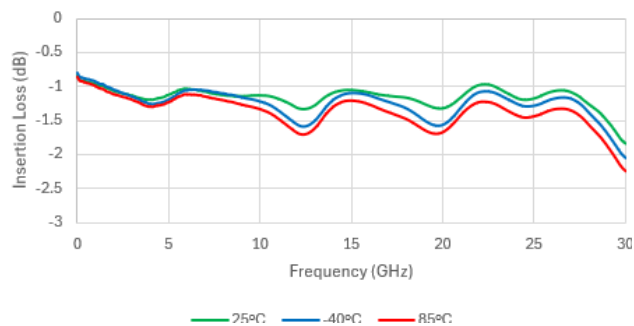


**Attenuation (Normalized)**

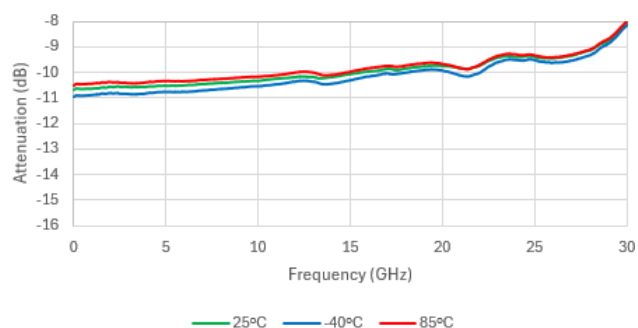


**Input Return Loss (Insertion Loss State)**

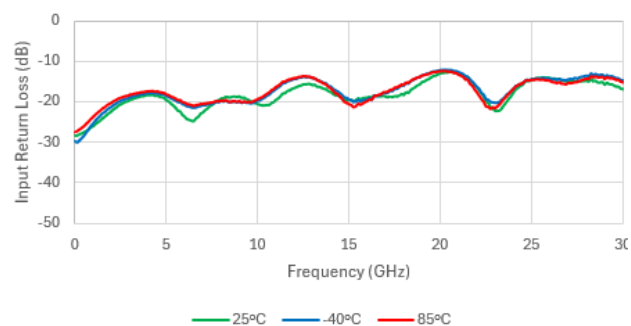


**Output Return Loss (Insertion Loss State)**

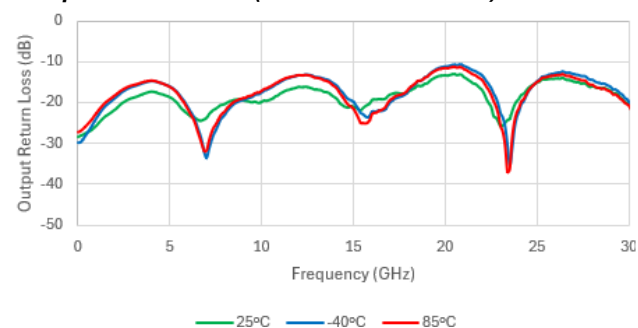

**Input Return Loss (Attenuation State)**

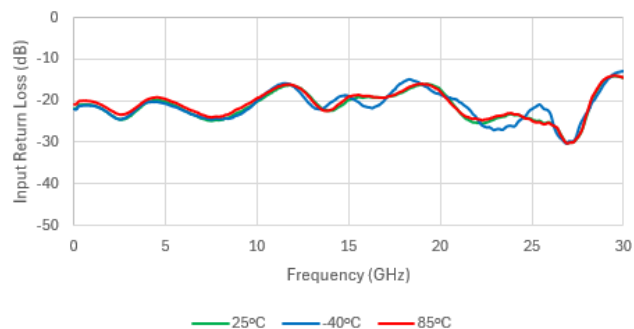

**Output Return Loss (Attenuation State)**

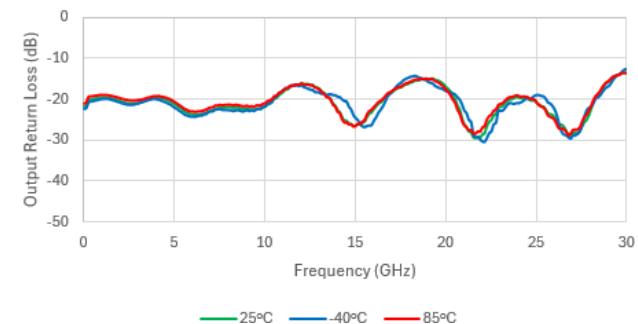


### Application Information

The MAAD-011057 is designed to deliver high performance and to be easy to use.


The MAAD-011057 attenuator is bidirectional. Pins 2 and 7 should be connected to the RF lines on the printed circuit board (PCB). The third required connection is that to the RF ground. The exposed metal paddle on the backside of the package must be connected to the RF ground of the PCB housing the Attenuator. This can be accomplished by using conductive via holes. It is important to ensure that the parasitic inductance associated with the connection between the attenuator and the RF ground is as small as possible.

A shunt resistor and capacitor should be included on each of the control lines for decoupling. These should be placed close to the device control pins, but as far away from the RF traces as possible.

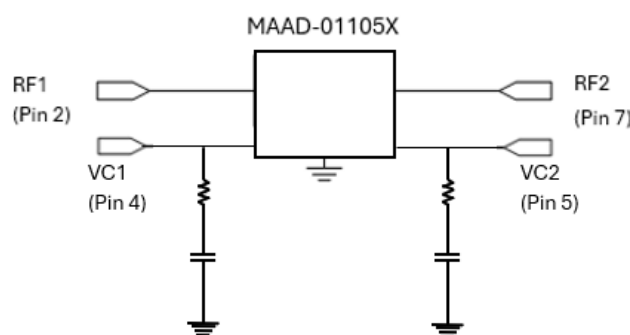

Component	Value
Resistor	50 $\Omega$
Capacitor	1 $\mu$ F


### Recommended PCB Configuration

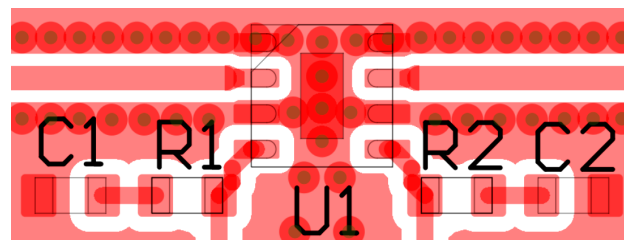


### Evaluation Board

An evaluation board for the MAAD-011057 attenuator with loose samples is available. The kit consists of a PCB with 2.4 mm connectors along with loose samples. MACOM suggests a Rogers 4003 dielectric of 0.008" (0.20 mm) with 1 ounce copper. Proper grounding is always important; we suggest using 8 mil (0.20 mm) vias placed generously underneath the part.

**Thru Line on Evaluation Board Insertion Loss**

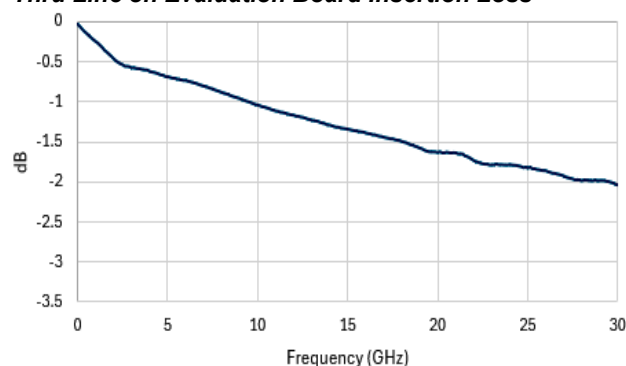

**Thru Line on Evaluation Board Return Loss**

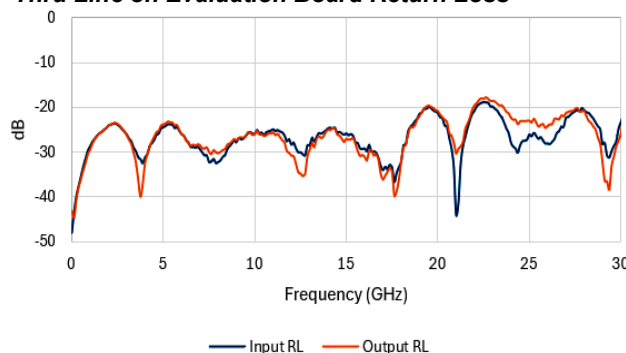


# Digital Attenuator 1-Bit, 10 dB DC - 30 GHz



MAAD-011057

Rev. V1

## Lead-Free 2 mm 8-Lead PQFN<sup>†</sup>

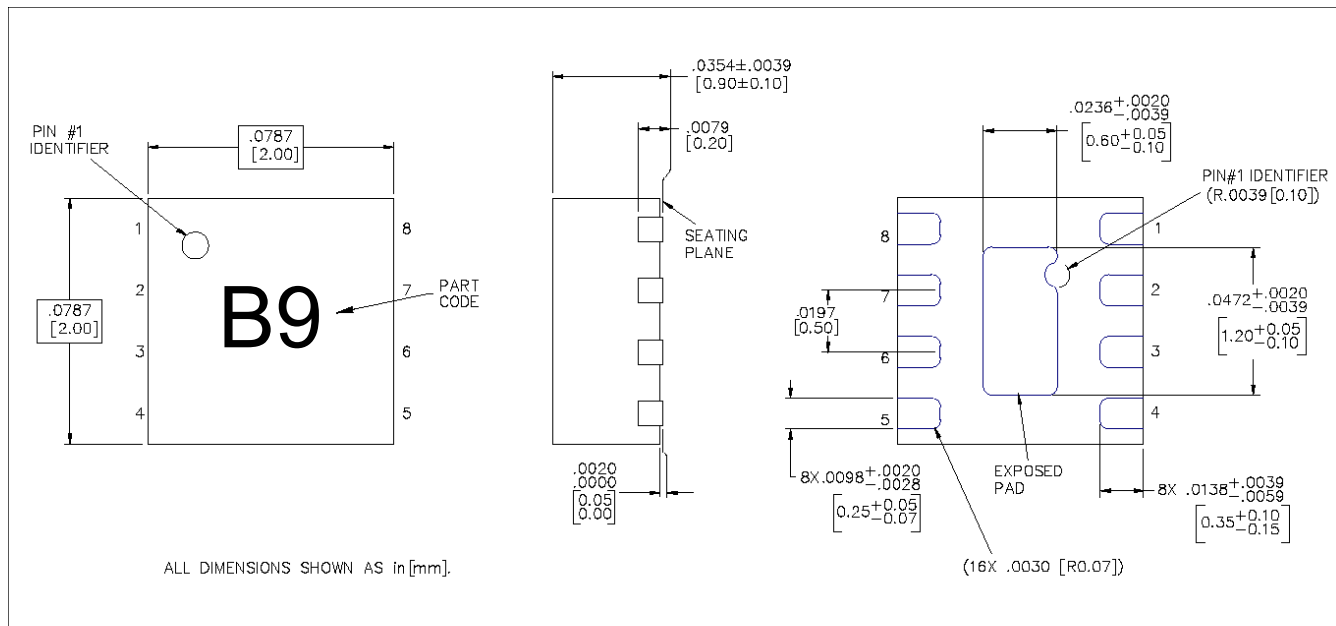

<sup>†</sup> Reference Application Note M2083 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level (MSL) 1 requirements.  
Plating is 100% matte tin over copper.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.