

Features


- Supports up to 40 W Power
- Low Insertion Loss, 0.25 dB up to 2.7 GHz
- Medium Isolation, 11 dB up to 2.7 GHz
- RoHS* Compliant

Applications

- ISM

Description

A broadband, high linearity, medium power series switch element in a 2.0 x 1.3 mm QFN package. This device is designed for WiMax, Wibro, WLAN, TD-SCDMA and other wireless infrastructure applications. It is also suited for 0.1 ~ 3 GHz applications with up to 40 watts of power.

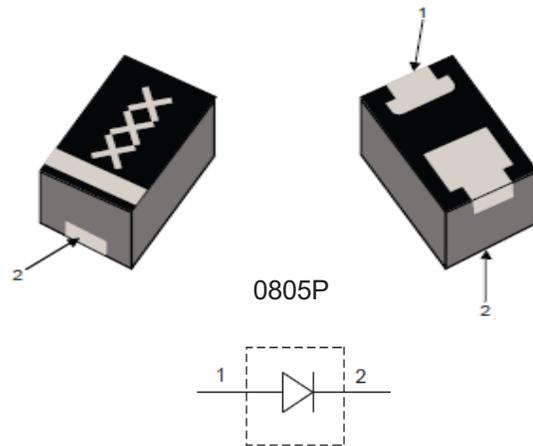

Electrical Specifications: $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Min.	Typ.	Max.	Units
Breakdown Voltage	$I_R = 10 \mu\text{A}$	250	—	—	V
Forward Voltage	$I_F = 50 \text{ mA}$	—	900	—	mV
Junction Capacitance	$V_R = -50 \text{ V}$, 1 MHz	—	0.12	—	pF
Series Resistance	$I_F = 10 \text{ mA}$, 500 MHz $I_F = 50 \text{ mA}$, 500 MHz	—	2.0 0.6	— 1.4	Ω
Lifetime	$I_F = 10 \text{ mA}$, $I_R = 6 \text{ mA}$, 50%	—	700	—	ns
I-Region	I-Layer	—	40	—	μm
Insertion Loss	$I_F = 50 \text{ mA}$, 2.025 GHz $I_F = 50 \text{ mA}$, 2.3 - 2.7 GHz	—	0.12 0.25	0.20 0.35	dB
Input Return Loss	$I_F = 50 \text{ mA}$, 2.025 GHz $I_F = 50 \text{ mA}$, 2.3 - 2.7 GHz	15 15	25 20	—	dB
Isolation	$V_R = 10 \text{ V}$, 2.025 GHz $V_R = 10 \text{ V}$, 2.3 - 2.7 GHz	10 9	14 11	—	dB


* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
Breakdown Voltage	250 V
Forward Current	100 mA
Thermal Resistance	20°C/W
Junction Temperature	+175°C
Storage Temperature	-55°C to +150°C
Solder Temperature	+260°C per JEDEC STD-J-20C


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

Junction Temperature vs. Input Power Backside of Board $T_A = 25^\circ\text{C}$, Board Thickness 62 mils

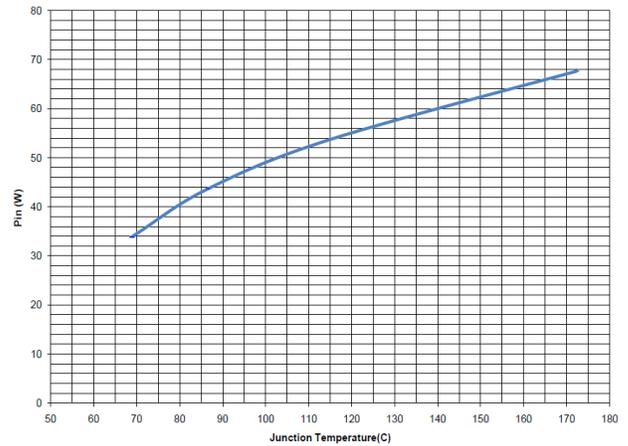


Typical RF Performance Curves @ +25°C


Insertion Loss

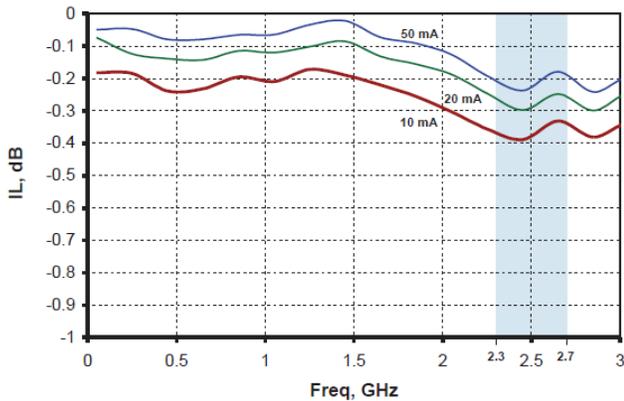


Isolation

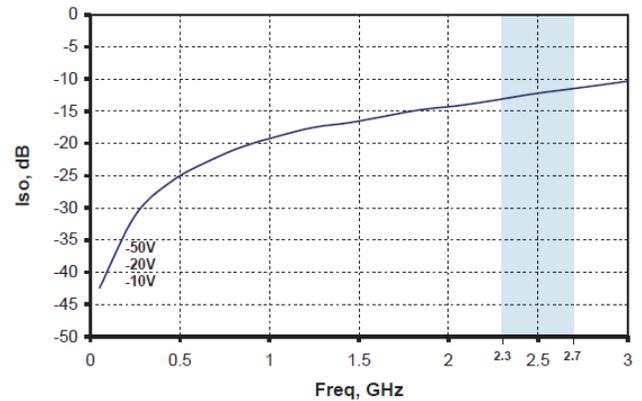


Input Return Loss

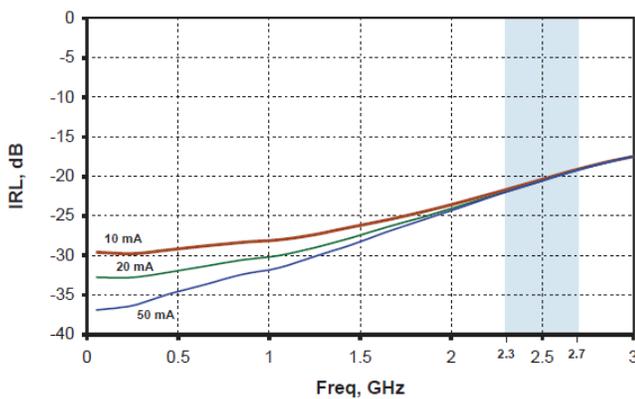

Series Resistance vs. Current, 500 MHz

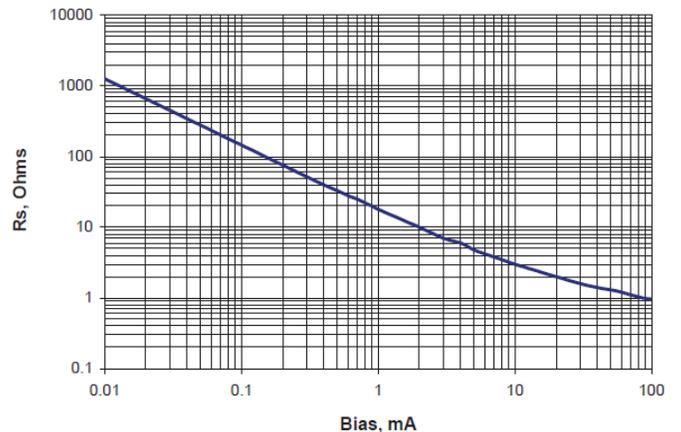

Bias Schematic (0.1 - 3.0 GHz)

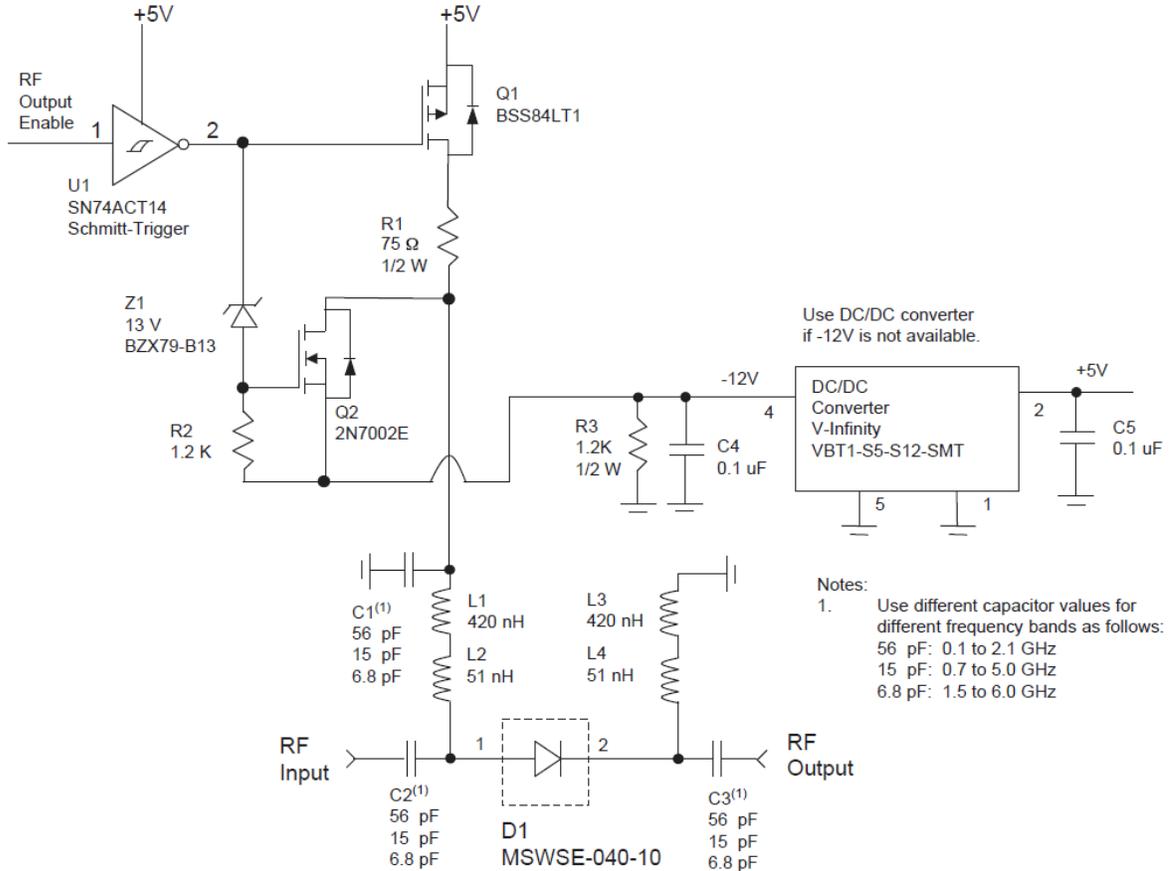


Parts List


Component	Description	Manufacturer	Manufacturer part #
R1	75Ω, 1/2W, 1210 chip resistor	KOA Speer	RK73B2ETTD750J
R2	1.2KΩ, 1/10W, 603 chip resistor	KOA Speer	RK73B1JT2D122J
R3	1.2KΩ, 1/2W, 1210 chip resistor	KOA Speer	RK73B2ETTD122J
C1,C2,C3 ³	56pF, 250VDC Capacitor, 0603 pkg	ATC	ATC600S560JT250XT
C1,C2,C3 ³	15pF, 250VDC Capacitor, 0603 pkg	ATC	ATC600S150JT250XT
C1,C2,C3 ³	6.8pF, 250VDC Capacitor, 0603 pkg	ATC	ATC600S6R8JT250XT
C4,C5	0.1 μF, 50VDC Capacitor, 0805 pkg	ATC	ATC0805XR7104KT2AT
L1,L3	420nH, 340mA, 700MHz SRF Inductor	Coilcraft	0402AF-421XJLW
L2,L4	51nH, 330mA, 2.3GHz SRF, Inductor	Coilcraft	0402HP-51NXJLW
Q1	50V, 130mA, P-Channel MOSFET	ON SEMI	BSS84LT1
Q2	60V, 310mA, N-Channel MOSFET	ON SEMI	2N7002E
U1	Hex Schmitt-Trigger TTL Inverter	Texas Instruments	SN74ACT14
Z1	13V, 2%, 500mW Zener Diode	Philips	BZX79-B13
DC1	1W, 5V to 12V DC/DC Converter	V-Infinity	VBT1-S5-S12-SMT-AFM

3. Use different capacitor values for different frequency bands as follows:
56 pF: 0.1 to 2.1 GHz
15 pF: 0.7 to 5.0 GHz


PCB Layout

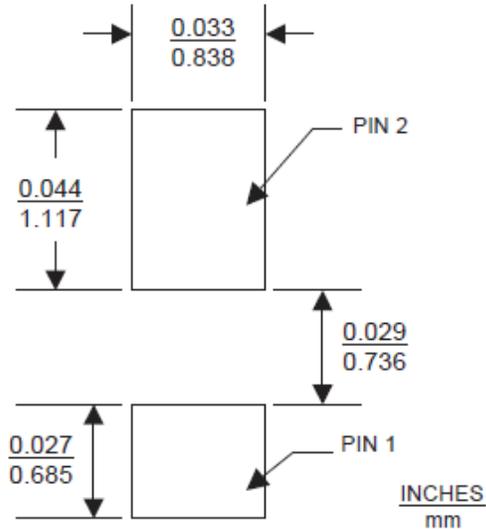

Schematic

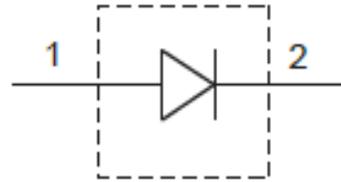

Outline (0805P)

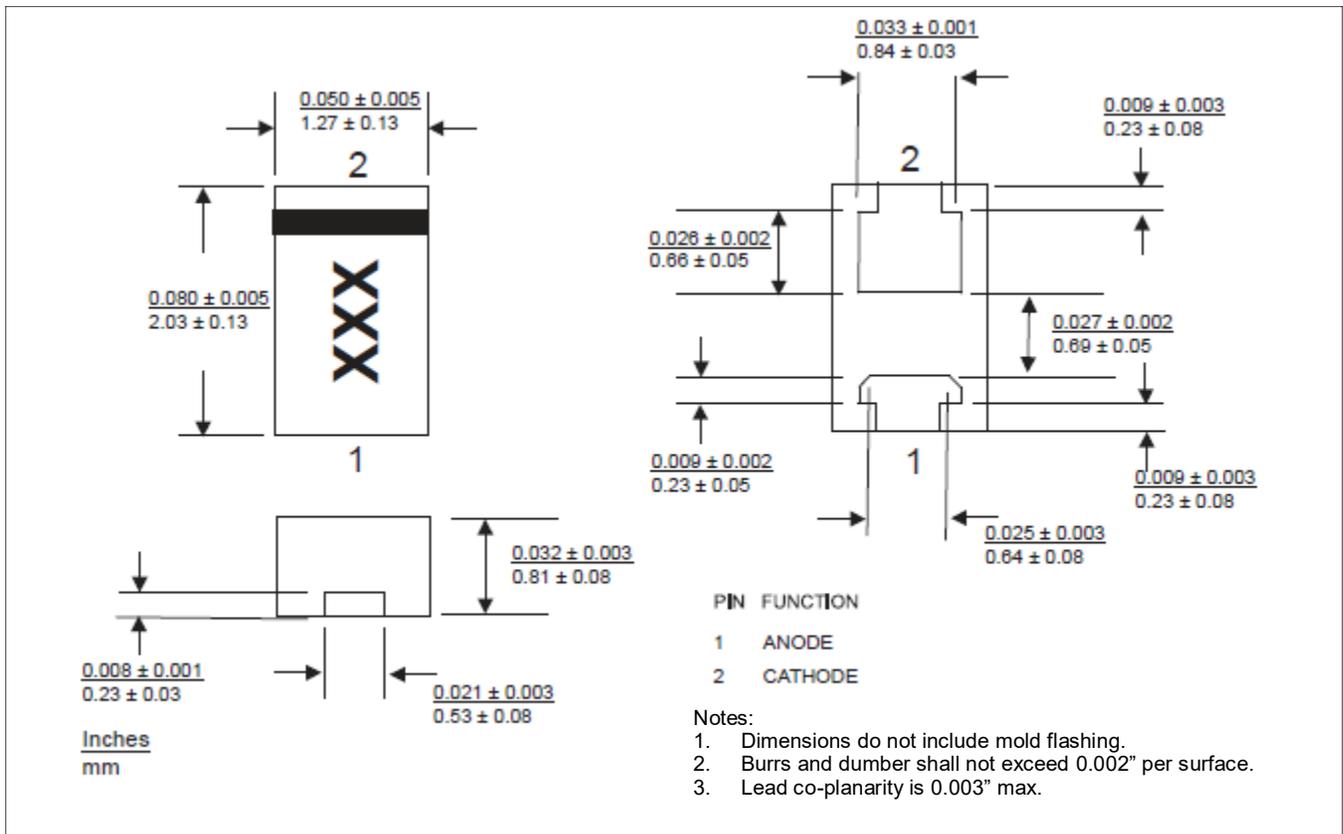

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.