MACOM

3G/HD/SD-SDI Long Reach Adaptive Cable Equalizer Pin Compatibility to Legacy SDI Cable Equalizers

Rev C

# 3G/HD/SD-SDI Long Reach Adaptive Cable Equalizer Pin Compatibility to Legacy SDI Cable Equalizers

## **Application Note**

Products Affected: M31544, M31564, M21544, M21554, M21564, M21324, and M21424

## Scope

To facilitate the use of MACOM's latest long reach adaptive cable equalizer family as a drop-in compatibility replacement option. This application note offers detailed pin-by-pin descriptions for the devices that are pin compatible. Table 1 lists the various options:

Table 1. Long Reach Adaptive EQ Parts Compatibility

New Long Reach Adaptive Equalizer Part	Pin Compatible to	Description	
M21544 / M31544	Texas Instruments LM0395	Dual Output EQ, 24-pin QFN, 4x4 mm	
M21554	MACOM M21424	Dual Output EQ, 32-pin QFN, 5x5 mm	
M21564 / 31564	MACOM M21324	Single Output EQ, 16-pin QFN, 4x4 mm	
	Texas Instruments LM0394		
	Semtech GS1574, GS2974A, GS2984 and GS3440		

Note: The following parts are 100% pin compatible:

- M21544 => M31544
- M21564 => M31564

The only difference between the M215x4 and the M315x4 is the SPI interface. The M215x4 SPI is 18-bit base (legacy SPI interface) while the M315x4 is 16-bit base (new SPI interface). All new Macom 12G-SDI parts have the new SPI interface.






Rev C

## M21544 Versus LM0395 Pin-by-Pin Description

Figure 1. Typical M21544 Implementation

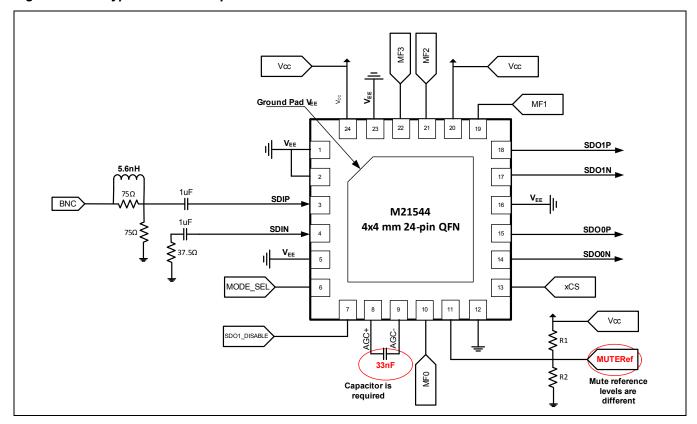

Pin Number	M21544, M31544 Pin	LM0395 Pin	Functional Difference
1,2,5,12,16,23, Ground Pad	V <sub>EE</sub>	V <sub>EE</sub>	None
20,24	V <sub>CC</sub> (2.5V)	V <sub>CC</sub> (2.5V)	None. Same Supply
3,4	SDIP/SDIN	SDI [P/N]	None
15,14	SDO0P/SDO0N	SDO0[P/N]	None
18,17	SDO1P/SDO1N	SDO0[P/N]	None
6	MODE_SEL	SPI_EN	None
7	SDO1_DISABLE	SDO1_DISABLE	None
8,9	AEC+/-	AEC+/-	M21544: Equalizer loop filter capacitor (33 nF). Needed for the Jitter Cleaner loop filter. LMH0395: Optional Equalizer loop filter capacitor (1 uF)
10	MF0	BYPASS/CDb	None
11	MUTERef	MUTERef	Threshold levels are different
13	xCS	V <sub>EE</sub> /SSb	None

21544-APP-001



#### 3G/HD/SD-SDI Long Reach Adaptive Cable Equalizer Pin Compatibility to Legacy SDI Cable Equalizers

Rev C


Pin Number	M21544, M31544 Pin	LM0395 Pin	Functional Difference
19	MF1	AUTOSLEEP/MISO	None
21	MF2	MUTE/SCK	None
22	MF3	xSD/MOSI	None



Rev C

## M21554 Versus M21424 Pin-by-Pin Description

Figure 2. Typical M21554 Implementation

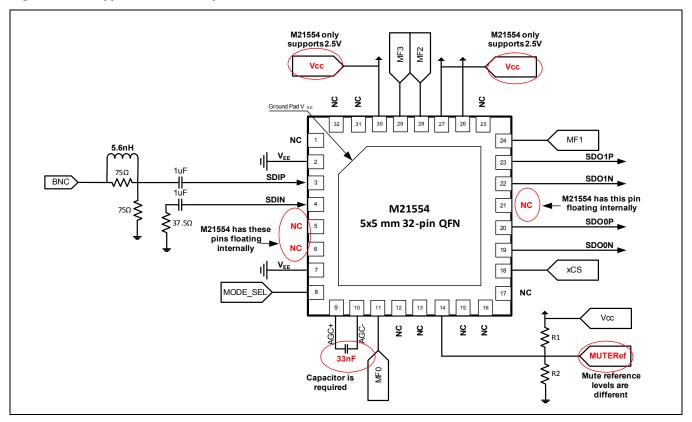

Pin Number	M21554	M21424	Functional Difference	
2,7, Ground Pad	V <sub>EE</sub>	AVss	None	
26,27,30	V <sub>CC</sub> (2.5V)	AV <sub>DD</sub> (2.5V and 3.3V)	M21554: Supports only 2.5 V	
3,4	SDIP/SDIN	SDI[P/N]	None	
20,19	SDO0P/SDO0N	SDO0[P/N]	None	
23,22	SDO1P/SDO1N	SDO0[P/N]	None	
8	MODE_SEL	AVSS	M21424 does not support digital interface M21554 set to Low = Hardware mode	
9,10	AEC+/-	AEC+/-	M21424: External AGC (Automatic Gain Control) capacitor (1.0 uF) M21544: Equalizer loop filter capacitor (0.033 uF). Needed for the Jitter Cleaner loop filter.	
11	MF0	EQ_BYP	None	
14	MUTERef	THRESH	Threshold levels are different	
17	xCS	Do Not Connect	M21554: Needed for digital interface	
24	MF1	AVSS	M21554 set to Low = Automatic Power Down	
28	MF2	SD/MUTE	M21554 input only, same function as M21424	

#### 21544-APP-001



### 3G/HD/SD-SDI Long Reach Adaptive Cable Equalizer Pin Compatibility to Legacy SDI Cable Equalizers

Rev C


Pin Number	M21554	M21424	Functional Difference
29	MF3	CLEN	M21424: Cable Length indicator (Analog voltage) M21554: Signal Detect (High or low, active low)
5	Do Not Connect	SDO2_EN	M21554: Not able to disable the second output in Hardware mode, only in software mode, register 01h.
6	Do Not Connect	SWING_L/H	M21554: Not able to control the output buffers' swing in Hardware mode, only in software mode, registers 01h and 02h.
21	Do Not Connect	$AV_DD$	None. M21554 has this pad floating internally.
1,12,13,15,16,17,25,31,32	Do Not Connect	Do Not Connect	None



Rev C

## M21564 Versus M21324, LMH0394, GS1574 and GS2974A Pin-by-Pin Description

Figure 3. Typical M21564 Implementation

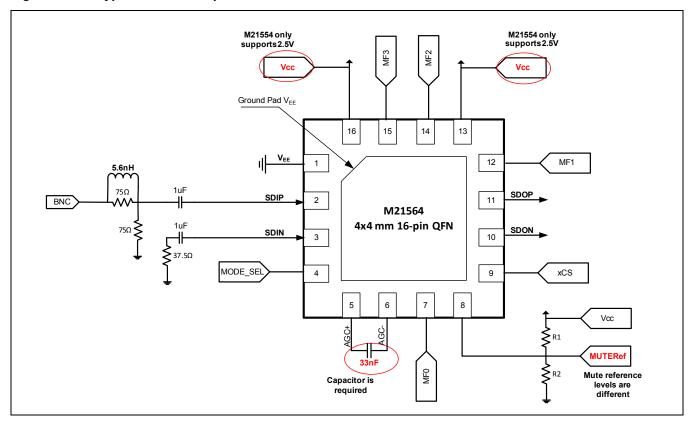

Pin Number	M21564, M31564	M21324	LMH0394	GS1574	GS2974A, GS2984	GS3440	Functional Difference
1, Ground Pad	V <sub>EE</sub>	AV <sub>SS</sub>	V <sub>EE</sub>	V <sub>EE_A</sub>	V <sub>EE_A</sub>	V <sub>EE_A</sub>	None
13,16	V <sub>CC</sub> (2.5V)	AV <sub>DD</sub> (3.3V)	V <sub>CC</sub> (2.5V)	V <sub>CC_A</sub> , V <sub>CC_D</sub> (3.3V)	V <sub>CC_A</sub> , V <sub>CC_D</sub> (3.3V)	V <sub>CC_A</sub> , V <sub>CC_O</sub> (3.3V)	M21564: Supports only 2.5 V
2,3	SDIP/SDIN	SDI[P/N]	SDI [P/N]	SDI [P/N]	SDI [P/N]	SDI [P/N]	None
11,10	SDOP/SDON	SDO[P/N]	SDO0[P/N]	SDO[P/N]	SDO[P/N]	SDO[P/N]	None
4	MODE_SEL	AV <sub>SS</sub>	SPI_EN	V <sub>EE_A</sub>	V <sub>EE_A</sub>	V <sub>EE_A</sub>	For M21564 this feature can only be accessed via registers, must be set to low.
							LMH0394: M21564 also supports a 4- wire interface
							GS2984, GS3440: Gain Select, 6dB boost.

21544-APP-001



#### 3G/HD/SD-SDI Long Reach Adaptive Cable Equalizer Pin Compatibility to Legacy SDI Cable Equalizers

Rev C

Pin Number	M21564, M31564	M21324	LMH0394	GS1574	GS2974A, GS2984	GS3440	Functional Difference
5,6	AEC+/-	AGC+/-	AEC+/-	AEC+/-	AEC+/-	AEC+/-	M21564: Equalizer loop filter capacitor (33 nF). Needed for the Jitter Cleaner loop filter.
							LMH0394: Optional equalizer loop filter capacitor (1 uF)
7	MF0	EQ_BYP	BYPASS/xSD	BYPASS	BYPASS	BYPASS	None
8	MUTERef	THRESH	MUTERef	MCLADJ	MCLADJ	SQ_DJ	Threshold levels are different.
9	xCS	AV <sub>SS</sub>	SSb	$V_{EE\_D}$	V <sub>EE_D</sub>	OP_CTL	GS2984: CMSET must be set low to be compatible
							GS3440: When this pin is grounded, output swing = 800mVppd
12	MF1	$AV_{SS}$	AUTOSLEEP/	V <sub>EE_D</sub>	V <sub>EE_D</sub>	V <sub>EE_O</sub>	None.
			MISO				M21564/LMH0394 set to Low = Automatic Power Down
14	MF2	Do Not	MUTE/SCK	MUTE	MUTE	SLEEP	M21564:MUTE (H)
		Connect					GS3440: H =Power down when no Signal. L = Always ON.
15	MF3	SD/MUTE	xSD/MOSI	Do Not Connect	xCD	xCD	M21564/LMH0394/GS2974A: Signal Detect (High or low, active low). Output Only M21324: Output: Signal Detect,
							Input: Force Mute

21544-APP-001



3G/HD/SD-SDI Long Reach Adaptive Cable Equalizer Pin Compatibility to Legacy SDI Cable Equalizers

Rev C

#### M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.