

Low Noise Amplifier

18 - 26 GHz



MAAL-FR1270

Rev. V2

Features

- Single Supply Architecture
- Noise Figure: 1.7 dB
- Gain: 18 dB
- P1dB: 5 dBm
- Return Loss: 15/8 dB
- Power Supply: 60 mA @ 1.5 V
- Lead-Free 3 x 4 QFN, 22 lead SMT
- Demonstration Boards Available
- RoHS* Compliant

Applications

- RADAR
- SATCOM

Description

The MAAL-FR1270 is a two stage low noise amplifier (LNA) designed to operate from 18 - 26 GHz with 1.7 dB of noise figure and 18 dB of gain. This amplifier is a single positive and single negative voltage bias which include a DC current regulation.

This LNA is matched to 50 Ω at both input and output ports.


The die is manufactured using a 0.07 μm gate length pHEMT technology. The MMIC uses gold bond pads and backside metallization and is fully protected with Silicon Nitride passivation to obtain the highest level of reliability.

Also available in DIE form part# CGY2121XUH/C1.

Ordering Information

Part Number	Package
MAAL-FR1270-TR0500	500 part reel
MAAL-FR1270-001SMB	Evaluation Board

Block Diagram

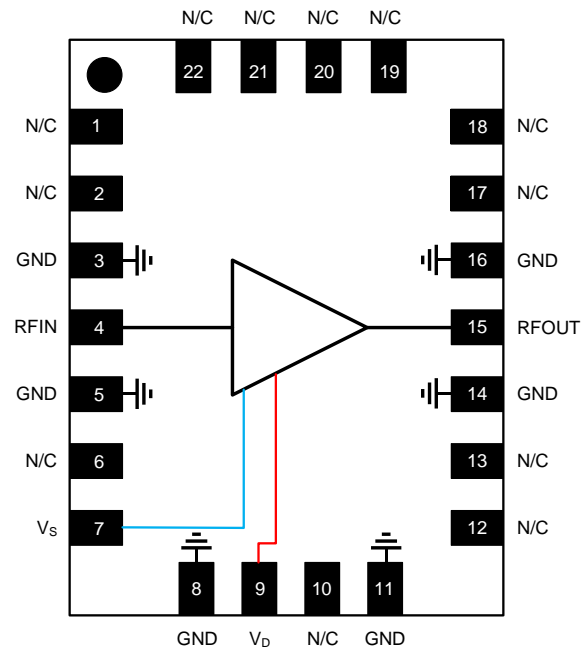

Pad Configuration

Pad #	Pad Name	Function
1,2,6,10,12,13,17,18,19,20,21,22	N/C	Not Connected
3,5,8,11,14,16	GND	Ground
4	RF _{IN}	RF Input
15	RF _{OUT}	RF Output
9	V _D	Voltage Drain
7	V _S	Voltage Source

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Electrical Specifications: Freq. = 18 - 26 GHz, $T_A = +25^\circ\text{C}$, $V_D = +1.5\text{ V}$, $V_G = -1.5\text{ V}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	18 - 24 GHz 24 - 26 GHz	dB	16 14	18 16	—
Noise Figure	—	dB	—	1.7	2.5
Drain Supply Voltage	—	V	—	1.5	—
Drain Supply Current	—	mA	—	60	—
Reverse Isolation	RF_{OUT} / RF_{IN}	dB	—	-40	—
P1dB	—	dBm	—	5	—
Output IP3	—	dBm	—	12	—
Output IM3	Tone Spacing = 100 MHz	dBc	—	30	—
Input Return Loss	50 Ω	dB	—	-10	—
Output Return Loss	50 Ω	dB	—	-8	—

Recommended Operating Conditions

Parameter	Typical Rating
Input RF Ports	-25 dBm
DC Voltage Drain Supply	+1.5 V
DC Voltage Source Supply	-1.5 V

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
Input RF Ports	+10 dBm
DC Voltage Drain Supply	+2.0 V
Junction Temperature ^{3,4}	+150°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Operating at nominal conditions with $T_J \leq +150^\circ\text{C}$ will ensure MTTF > 1×10^{11} hours.
- Junction Temperature (T_J) = $T_C + \Theta_{JC} * (V * I)$
Typical thermal resistance (Θ_{JC}) = 468°C/W.
a) For $T_C = +25^\circ\text{C}$,
 $T_J = 60.1^\circ\text{C}$ @ 1.5 V, 60 mA
b) For $T_C = +85^\circ\text{C}$
 $T_J = 127^\circ\text{C}$ @ 1.5 V, 65 mA

Low Noise Amplifier

18 - 26 GHz




MAAL-FR1270

Rev. V2


Typical Performance Curves: $V_D = +1.5$ V, $V_S = -1.5$ V, $I_D = 60$ mA

S-Parameters & Noise @ PCB level with De-Embedding at different temperatures


Noise Figure vs. Frequency

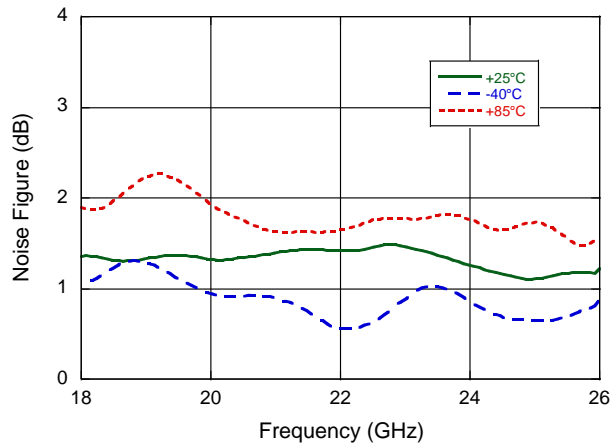


Gain vs. Frequency

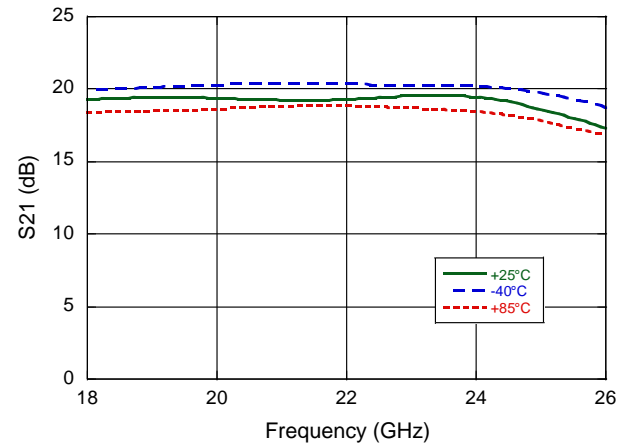


Input Return Loss vs. Frequency

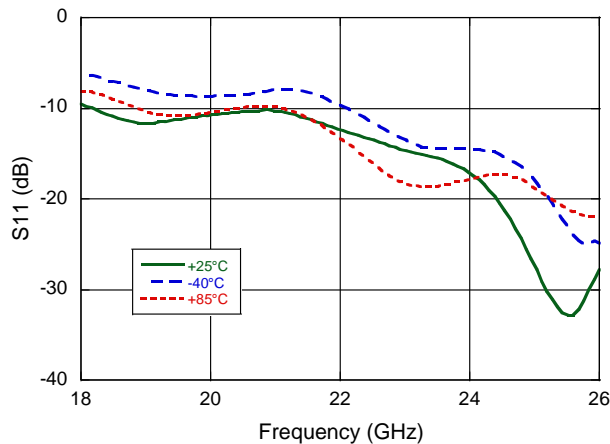


Output Return Loss vs. Frequency

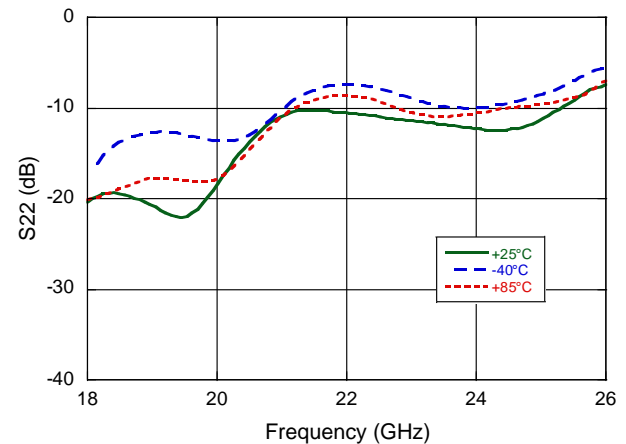

Reverse Isolation vs. Frequency

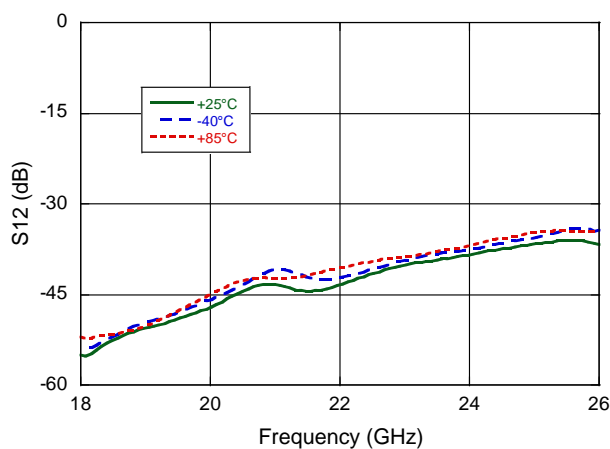

RF Access Line & Connector Losses vs. Frequency

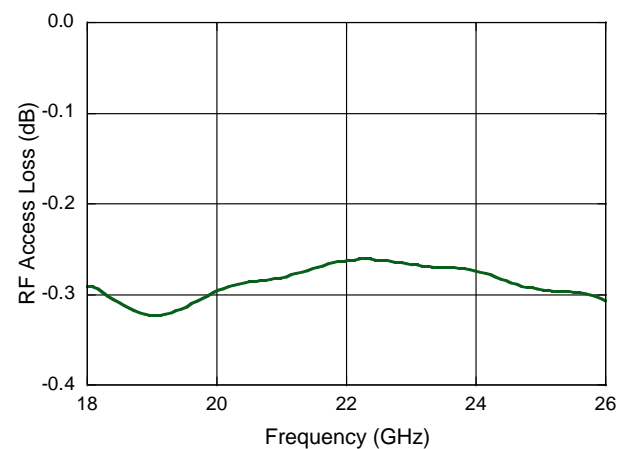

Low Noise Amplifier

18 - 26 GHz




MAAL-FR1270

Rev. V2


Typical Performance Curves:

In board with De-Embedding at different temperatures


P1dB vs. Frequency

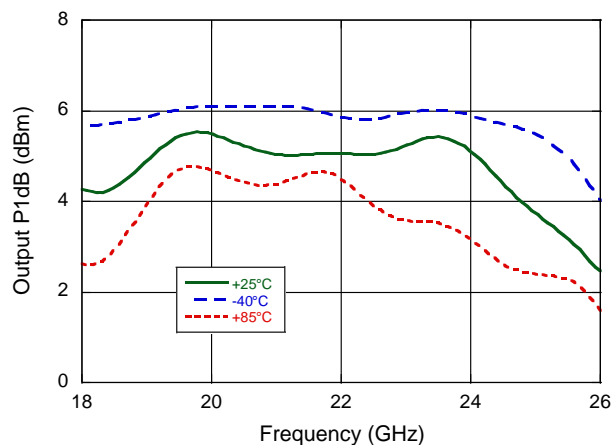

OIP3 vs. Frequency

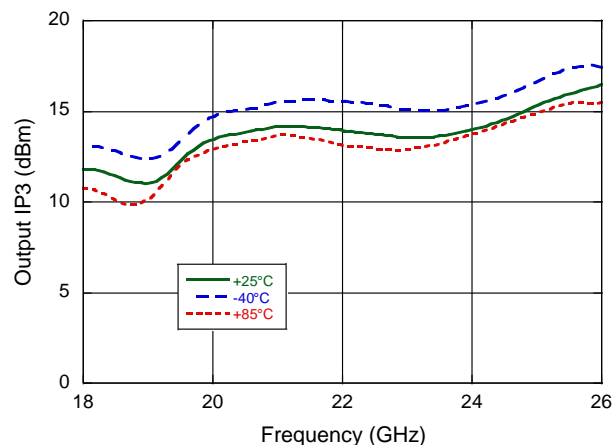

IM3 vs. Frequency

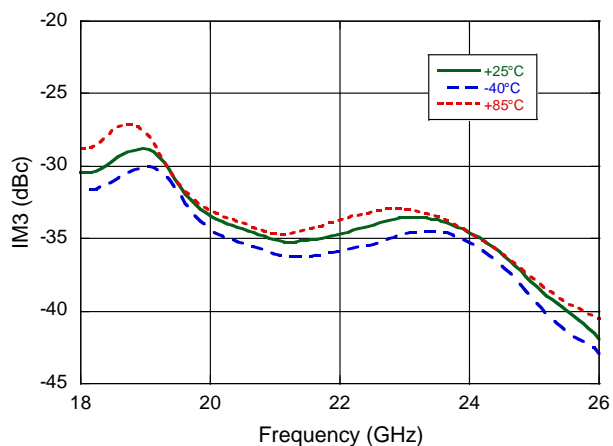

Biasing Procedure

Biasing UP
Set I_D limit to 80 mA.
Ensure voltages are at 0 before to turn on DC supply.
Set V_S to -1.5 V.
Set V_D to +1.5 V.

Biasing DOWN
Set V_D to 0 V.
Set V_S to 0 V.
Turn off DC supply.


Low Noise Amplifier 18 - 26 GHz




MAAL-FR1270

Rev. V2

PCB Layout

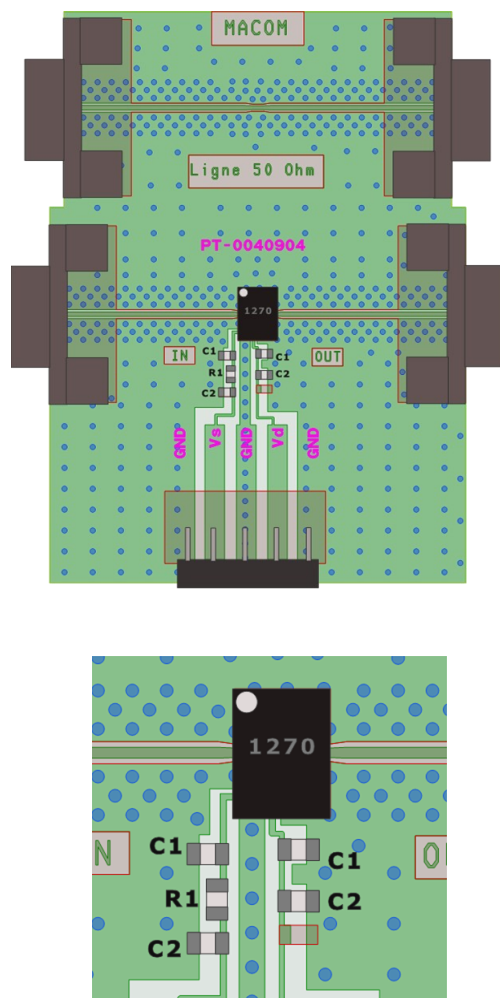


Functional Schematic

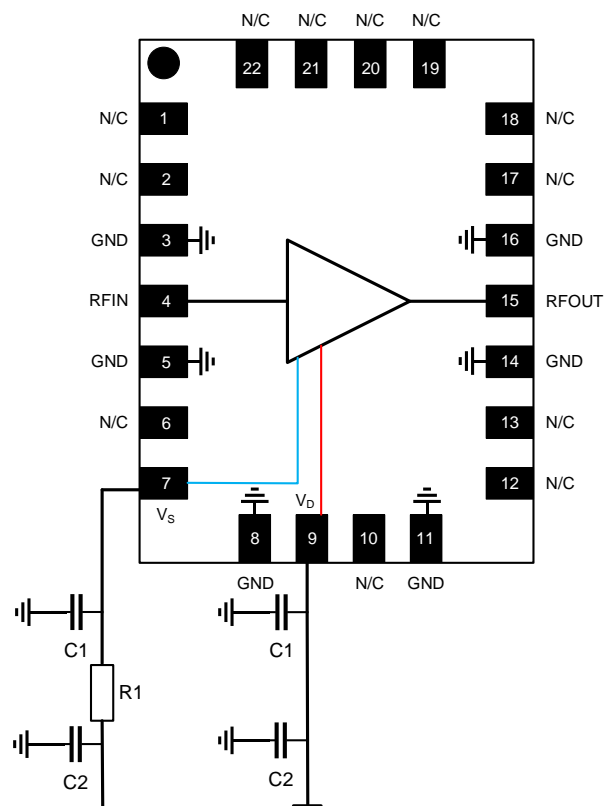

Parts List

Part	Value	Case Style	Manufacturer	Manufacturer's Part number
C1	47 pF	0402	Murata	GRT1555C1H470JA02D
C2	10 nF	0402	Murata	GRT188R71E474KE13D
R1	100 Ω	0402	Vishay	CRCW0402100RFKEDC

Lead-Free 3 x 4, 22-Lead SMT[†]

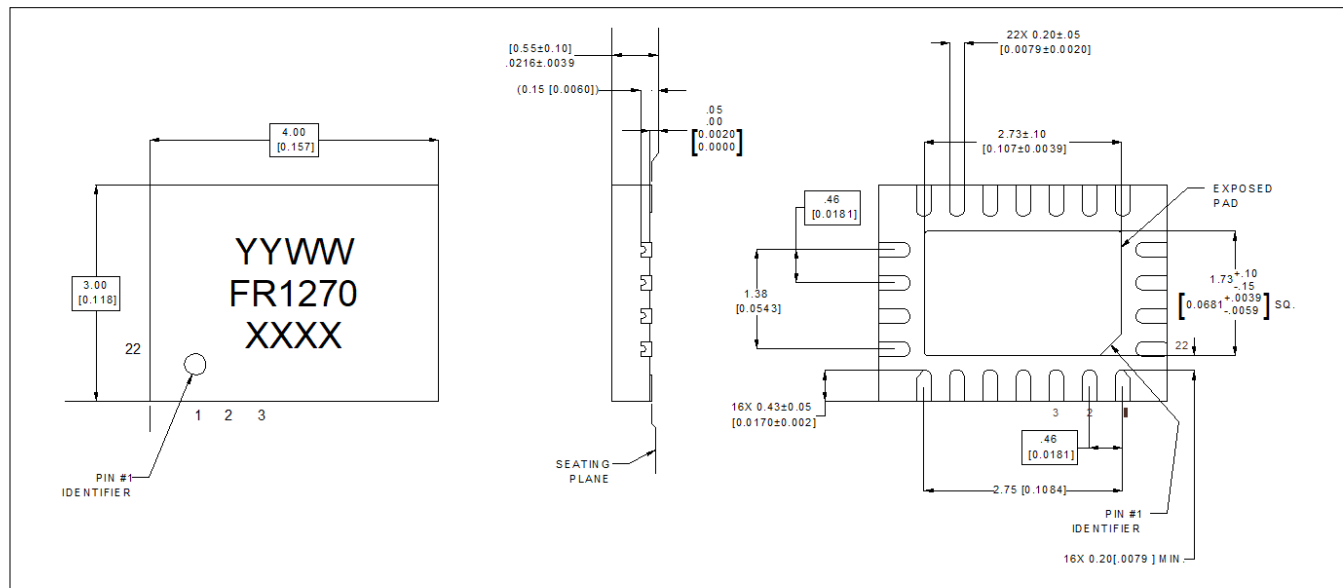

[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level (MSL) 1 requirements.
Plating is NiPdAu over Copper.

Revision History

Rev	Date	Change description
V1	Jan. 2025	Initial Release
V2	April 2025	Updated T&R Ordering Part Number to –TR0500 from –TR1000

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.