

# 1:1.33 Transmission Line Balun Transformer

## 5 - 1000 MHz



MABA-009092-CT1A40

Rev. V3

### Features

- Surface Mount Technology
- 1:1.33 Impedance
- 75  $\Omega$  Single Ended to 100  $\Omega$  Balance
- RoHS Compliant
- Available on Tape & Reel


### Applications

- CATV / Broadband

### Description

MABA-009092-CT1A40 is a 1:1.33 RF Transmission Line Transformer in a low cost surface mount package. Ideally suited for high volume CATV/Broadband applications.

### Functional Schematic

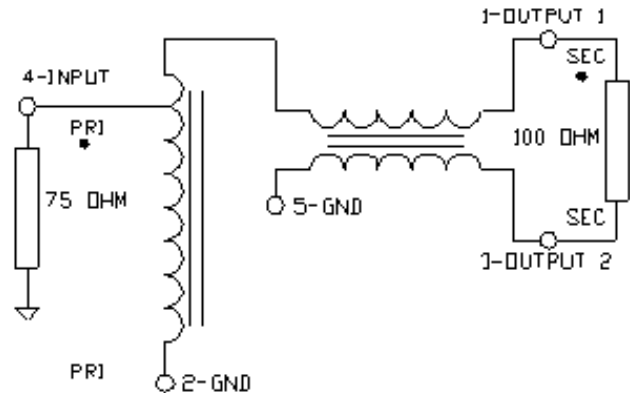

### Pin Configuration<sup>3</sup>

Pin #	Function
1	Secondary Dot (op1)
2	Primary (ground)
3	Secondary (op2)
4	Primary Dot (Input)
5	(ground)

### Ordering Information<sup>1,2</sup>

Part Number	Package
MABA-009092-CT1A40	2000 piece reel
MABA-009092-CT1ATB	Customer Test Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

3. MACOM recommends connecting unused package pins to ground.

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

# 1:1.33 Transmission Line Balun Transformer

## 5 - 1000 MHz



MABA-009092-CT1A40

Rev. V3

**Electrical Specifications: Freq. = 5 - 1000 MHz,  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75 \Omega$**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss 1 (Pin 4 to Pin 1)	5 - 50 MHz 50 - 870 MHz 870 - 1000 MHz	dB	—	0.3 0.6 1.75	0.4 1.8 2.4
Insertion Loss 2 (Pin 4 to Pin 3)	5 - 50 MHz 50 - 870 MHz 870 - 1000 MHz	dB	—	0.94 0.7 1.0	1.4 1.2 1.5
Amplitude Balance	5 - 50 MHz 50 - 870 MHz 870 - 1000 MHz	dB	—	0.7 0.13 0.74	$\pm 1.3$ $\pm 1.0$ $\pm 1.4$
Phase Balance	5 - 50 MHz 50 - 1000 MHz	°	—	4 5	$\pm 16$ $\pm 9$
Input Return Loss (Pin 4)	5 - 50 MHz 50 - 400 MHz 400 - 870 MHz 870 - 1000 MHz	dB	13 20 9 8	23 27 17 12	—

### Absolute Maximum Ratings<sup>4,5</sup>

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. MACOM does not recommend sustained operation near these survivability limits.

# 1:1.33 Transmission Line Balun Transformer

## 5 - 1000 MHz




MABA-009092-CT1A40


Rev. V3

### Typical Performance Curves<sup>6</sup>


Insertion Loss 1 (Pin4 - Pin1)

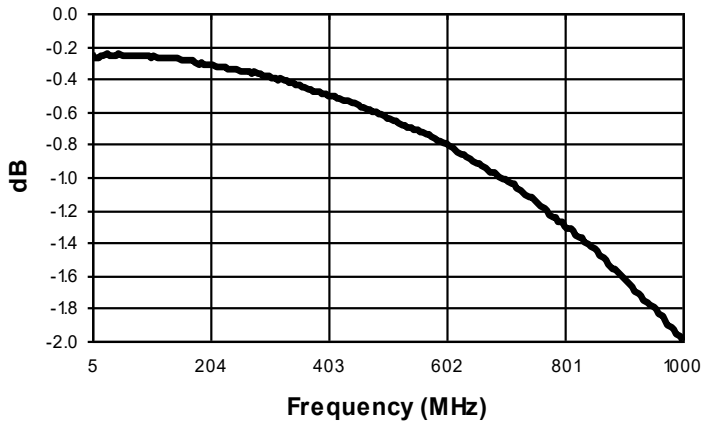


Insertion Loss 2 (Pin4 - Pin3)

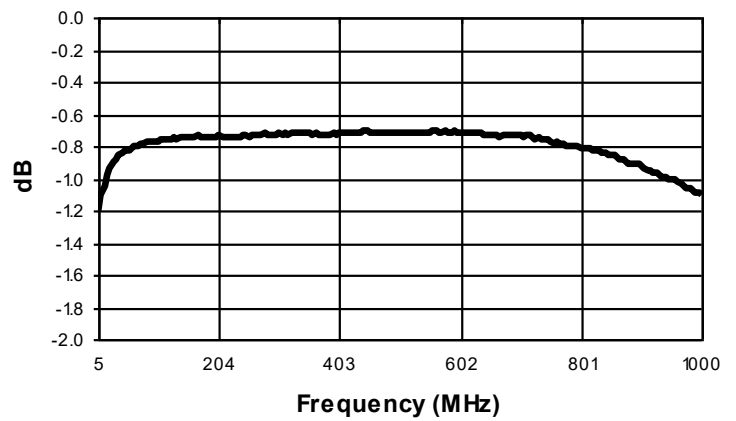


Amplitude Balance

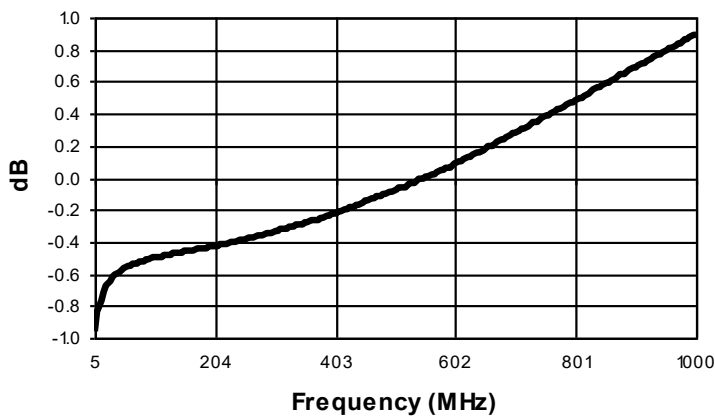

Phase Balance

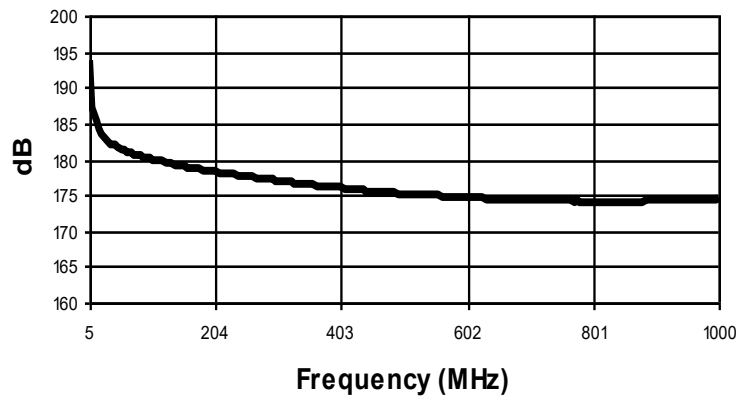

Return Loss: Input (Pin4)

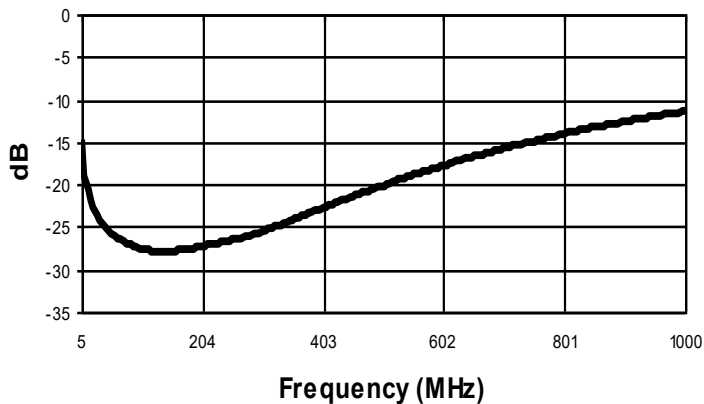

3 6. Temperature plots available on request.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

For further information and support please visit:  
<https://www.macom.com/support>

DS-MABA-009092-CT1A40

# 1:1.33 Transmission Line Balun Transformer


## 5 - 1000 MHz



MABA-009092-CT1A40



Rev. V3

### Recommended PCB Layout<sup>7</sup>




7. Dimensions are mm  $\pm 0.38$  unless otherwise specified.

### Outline Drawing<sup>8,9,10,11</sup>

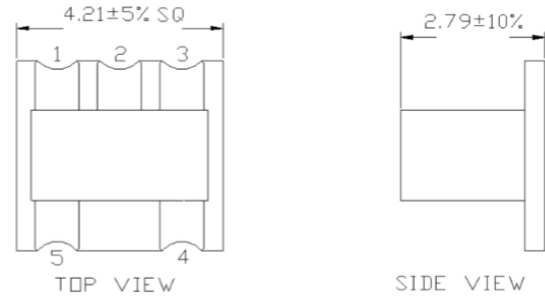

- 8. Dimensions in mm.
- 9. Tolerance:  $\pm 0.2$  mm unless otherwise noted.
- 10. Model number and lot code printed on reel.
- 11. Plating finish: ENIG on both sides, 0.05 to 0.1  $\mu\text{m}$  gold over 3 to 6  $\mu\text{m}$  nickel

### Carrier Tape Orientation

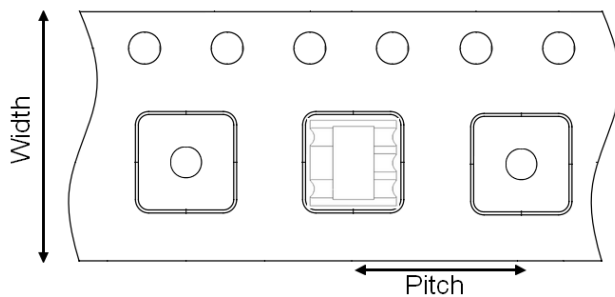

### Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Orientation	-	F31
Reference Application Note ANI-019 for orientation		

# 1:1.33 Transmission Line Balun Transformer

## 5 - 1000 MHz



MABA-009092-CT1A40

Rev. V3

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.