

7 dB Coupler, 75 Ω 5 - 2400 MHz


Rev. V4

#### **Features**


- 7 dB Coupler
- · Surface Mount Package
- Excellent Return Loss
- RoHS Compliant & Lead-Free
- Available on Tape & Reel

#### **Description**

The MACP-010381-C70880 is a high performance 75  $\Omega$  coupler in a surface mount package. Ideally suited for high volume CATV applications.



#### **Functional Schematic**

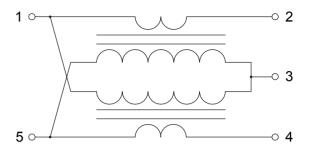

#### **Pin Configuration**

Pin#	Function	Pin#	Function
1	Input	4	External 75 Ω
2	Output	5	Coupled
3	Ground		

### Electrical Specifications: Freq. = 5 - 2400 MHz, $T_A = 25^{\circ}C$ , $Z_0 = 75 \Omega$ , $P_{IN} = 0 \text{ dBm}$

Parameter	Freq. Test Conditions (MHz)	Units	Min.	Тур.	Max.
Coupling	5 - 50 50 - 2400	dB	 5.5	7.0 7.0	9.0 8.5
Coupling Flatness	5 - 1000	dB	_	_	2.5
Main Line Loss	5 - 1500 1500 - 2400	dB	_	2.3 3.0	3.0 4.5
Isolation	5 - 2400	dB	15	21	_
Input Return Loss	5 - 2400	dB	5	20	_
Output Return Loss	5 - 2400	dB	5	15	_
Coupling Return Loss	5 - 2400	dB	5	13	_

## **Ordering Information**

Part Number	Package	
MACP-010381-C70880	2000 piece reel	
MACP-010381-C708TB	customer test board	

### **Recommended Maximum Ratings**

Parameter	Units	
Input Power	250 mW	
DC Current	200 mA	
Operating Temperature	-40°C to +85°C	
Storage Temperature	-55°C to +125°C	

1




7 dB Coupler, 75 Ω 5 - 2400 MHz


Rev. V4

#### **Typical Performance Curves**


Main Line Loss (pin 1 - pin 2)

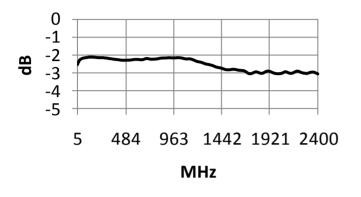


#### Coupling (pin 1 - pin 5)

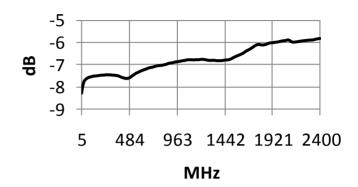


#### Input Return Loss (pin 1)

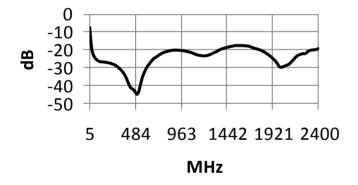


#### Output Return Loss (pin 2)

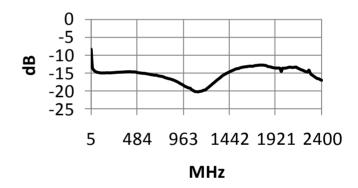

#### Coupled Port Return Loss (pin 5)

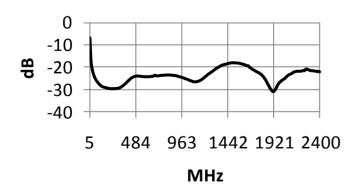

#### Directivity (pin 1 - pin 4)

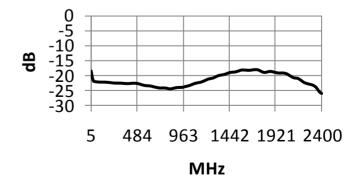





7 dB Coupler, 75 Ω 5 - 2400 MHz

Rev. V4


### **Application Schematic**

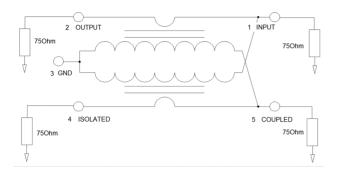

#### **Recommended Board Layout**

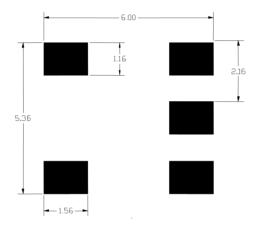

## Outline Drawing 1,2,3,4

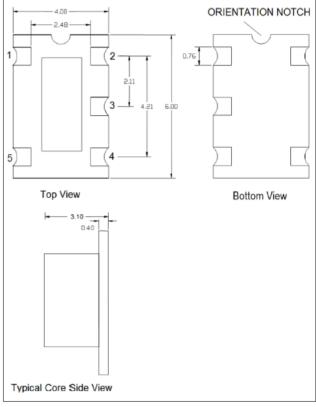

- 1. Dimensions in mm.
- 2. Tolerance: ±0.2mm unless otherwise noted.
- 3. Model number and lot code printed on reel.
- 4. Plating finish: ENIG on both sides, 0.05 to 0.1  $\mu$ m gold over 3 to 6  $\mu$ m nickel.

#### **Tape & Reel Information**

Parameter	Units	Value		
Qty per reel	-	2000		
Reel Size	mm	330		
Tape Width	mm	16.0		
Pitch	mm	8.0		
Ao	mm	4.3		
Во	mm	6.3		
Ko	mm	3.2		
Orientation	-	F45		
Reference Application Note ANI-019 for orientation				



7 dB Coupler, 75 Ω 5 - 2400 MHz

Rev. V4

#### MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

4