

Features

- High Average Incident Power Handling
- Low Loss/ Low Distortion
- Rectangular MELF Ceramic Package
- Hermetically Sealed
- RoHS* Compliant

Applications

- MIL-Com
- Public Safety Radio


Description

The MADP-04P604-1079T is a surface mount PIN diode in a Metal Electrode Leadless Faced (MELF) package.

The MADP-04P604-1079T is manufactured using MACOM's time proven HIPAX technology. The result is a low inductance ceramic package with no ribbons or wires. Incorporated in the package is a glass passivated CERMA chip that is full face bonded on the cathode and anode which maximizes the surface contact area to minimize the electrical and thermal resistances. The chip and package have been comprehensively characterized both electrically and mechanically to ensure repeatable and predictable performance.


The MADP-04P604-1079T is designed for high power switching applications used in MIL-Com and Public Safety Radio systems.

Case Style ODS 1079

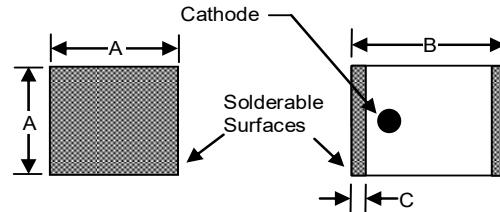

Case Style	Size Inches (mm)		
	A (sq) Min./Max.	B Min./Max.	C Min./Max.
ODS-1079	0.098/0.118 (2.49/3.00)	0.185/0.205 (4.70/5.21)	0.008/0.030 (0.203/0.762)

Circuit Pad Layout



Dimension	inches	mm
A	0.110	2.79
B	0.050	1.27
C	0.140	3.56

Ordering Information

Part Number	Package
MADP-04P604-1079T	750 piece reel

1 * Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Electrical Specifications: $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Forward Voltage	$I_F = 50 \text{ mA}$	V	—	—	1
Reverse Voltage	$I_R = <100 \text{ nA}$	V	600	—	—
Capacitance	100 V, 1 MHz	pF	—	—	0.65
Series Resistance ¹	100 mA, 100 MHz	Ω	—	—	0.75
Parallel Resistance	100 V, 100 MHz	k Ω	150	—	—
CW Power Dissipation	—	W	—	15	—
Nominal Carrier Lifetime	50% Control Voltage to 50% Output Voltage	μs	—	3	—
Nominal I-Region Width	—	μm	—	95	—

1. Series Resistance is measured on an HP4191A Impedance Analyzer.

Absolute Maximum Ratings^{2,3,4}

Parameter	Absolute Maximum
Reverse Voltage	-600 V
Operating Temperature	-55°C to +150°C
Storage Temperature	-55°C to +175°C
Mounting Temperature	+260°C for 90 seconds

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Values will de-rate over temperature.

Handling Procedures

Please observe the following precautions to avoid damage:

Device can be handled with tweezers or vacuum pickups and are suitable for use with automatic pick-and-place equipment.

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 1 devices.

Cleanliness and Storage

These devices should be handled and stored in a clean environment. Ends of the device are tin plated for greater solderability. Continuous exposure to high humidity (>80%) for extended periods may cause the surface to oxidize. Caution should be taken when storing devices for long periods.

Mounting Techniques

Solder Attach

Typical wave soldering or reflow techniques may be used to mount MACOM's SMQ packages to circuit boards using Sn63/Pb37 alloy or RoHS compliant solders. For more information visit the MACOM website and read application note M538.

RoHS

The MADP-04P604-1079T is fully RoHS compliant meaning it contains less than the maximum allowable concentration of 0.1% by weight in homogenous materials for lead, hex chrome, mercury, PBB, PBDE, and 0.01% for cadmium.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.