

Surface Mount GAsS Tuning Varactor

MAVR-000202-12790T
Rev 1.0


Features

- Hyperabrupt Varactor (Gamma of 1.25)
- Small Profile Surface Mount Package
- RoHS Compliant Package
- Supplied on Tape and Reel

Description

The MAVR-000202-12790T diode is a hyperabrupt tuning varactor with constant gamma of 1.25 from 2 to 20 volts. This device offers a large capacitance ratio and high quality factor.


It is offered in the surface mount, RoHS compliant, plastic SC-79 package.

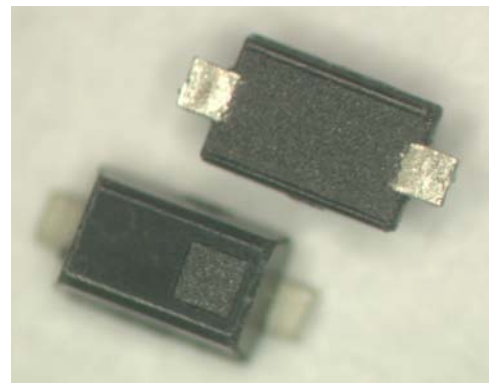

Applications

In addition to the electrical characteristics of the MAVR-000202-12790T the small package size and minimal package parasitics (0.6nH package inductance) make these parts attractive for wide bandwidth VCOs where the optimum combination of very wide tuning range and high quality factor is required.

Configurations (Topview)

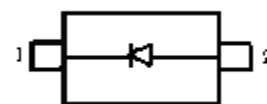

SINGLE

Maximum Ratings @ + 25 ° C

Parameter	Unit	Values
Operating Temperature	°C	-65 to +125
Storage Temperature	°C	-65 to +125
Power Dissipation		50mW @25°C, derate linearly to 0mW at maximum operating temperature
Reverse Voltage @ 25°C	V	22
Forward Current	mA	50
Soldering Temperature (Lead Free Part #)	°C	+260 for 5 sec.

Specification Subject to Change Without Notice

M/A-COM, Inc.

1

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81-44-884-8296
Fax +81-44-884-8298

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

Electrical Specifications @ + 25° C


Gamma 1.13 – 1.38, VR = 2 to 20V

Parameter	Condition	Symbol	Specification
Breakdown Voltage	$I_R = 10 \mu A$	V_B	22 V min.
Reverse Leakage Current	$V_R = 16 V$	I_R	100 nA max.
Total Capacitance ¹	$V_R = 4 V$ $f = 1 MHz$	C_T	2.7 – 3.3pF
Total Capacitance Ratio	$V_R = 4 V/20V$ $f = 1 MHz$	-	5.6

1. The values guaranteed for gamma are measured on unpackaged chips.

Dimensional Outline

SC-79 Package (Outline 1279)

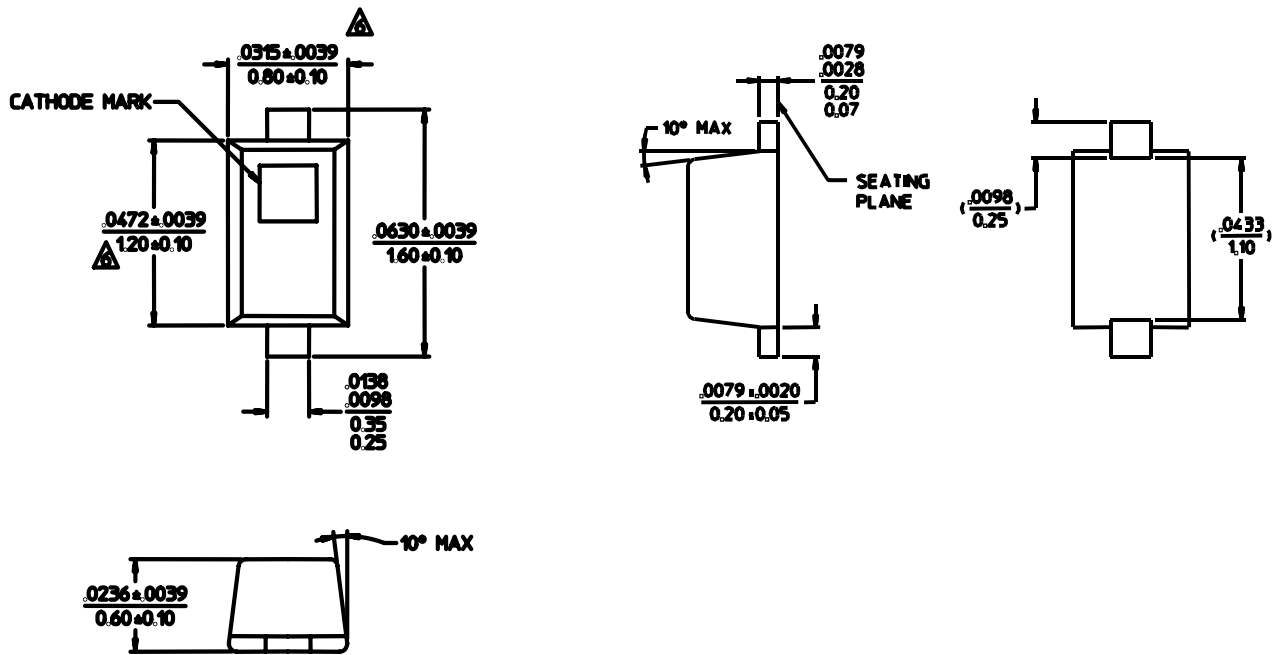

Specification Subject to Change Without Notice