

Features

- Nanosecond Switching Speed with Low-Cost TTL Logic
- Low Series Resistance
- No Reverse Bias Required for Low Loss
- RoHS* Compliant

Description

The MGPN GaAs PIN Diodes are a series of GaAs PIN diodes suitable for high frequency, >26 GHz, switch and high speed modulation applications.



C01A

C12

Available Chip Packages

Electrical Characteristics, $T_C = +25^\circ\text{C}$


Parameters	V_{BR}		V_F	C_J		R_S		T_L	
Units	V		mV	pF		Ohms		ns	
Test Condition	$I_R = 10 \mu\text{A}$		$I_F = 10 \text{ mA}$	$V_R = 10 \text{ V}, F = 1 \text{ MHz}$		$I_F = 20 \text{ mA}, F = 1 \text{ GHz}$		$I_F = 10 \text{ mA}, I_R = 6 \text{ mA}$	
	Min.	Typ.	Typ.	Typ.	Max.	Typ.	Max.	Typ.	Max.
MGPN0515-C12	50	68	1300	0.13	0.15	0.85	1.0	6	9
MGPN0518-C12	50	68	1300	0.16	0.18	0.75	1.0	6	9
MGPN1506-C12	150	205	1300	0.05	0.06	1.6	2.0	15	20
MGPN1504-C01A	150	205	1350	0.036	0.04	2.0	3.0	8	10
MGPN1503-C01A	150	205	1350	0.027	0.03	2.0	3.0	8	10

Absolute Maximum Ratings


Rating	Limits
V_R	Vbr
I_F	150 mA
θ_{JC}	225°C/W
P_{DISS}	400 mW de-rated to zero at 150°C
T_J	175°C
T_{STG}	-65°C to +200°C
$T_{die \text{ attach}}$	<320°C per 5 sec
Electrostatic Discharge (ESD)	Class 0 (Human Body Model)

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Series Resistance vs. Bias Current @ 25°C, 500 MHz

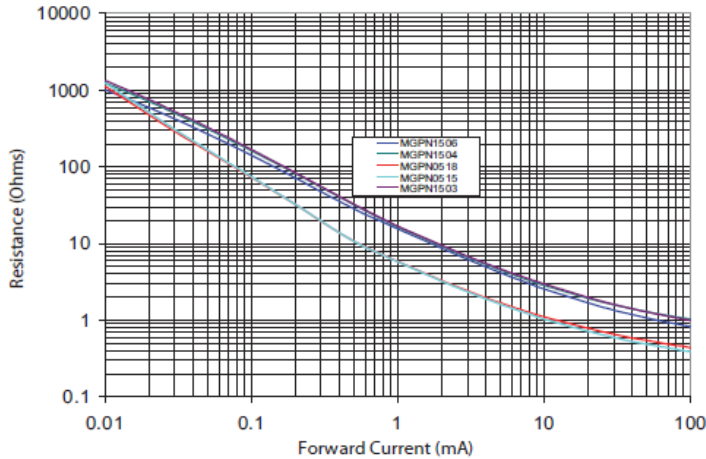

DIE Outline

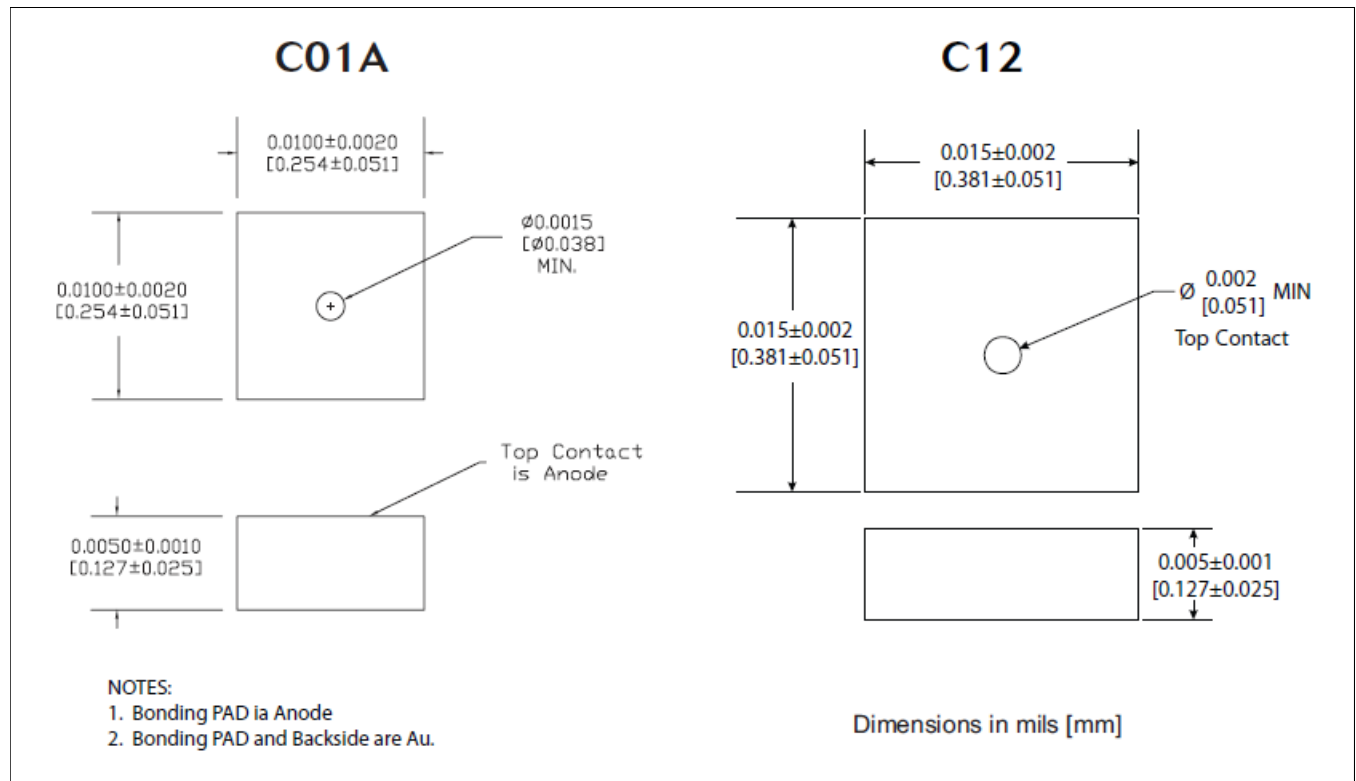

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.