


Features

- Supports up to 40 Watts Power
- Low Insertion Loss 0.4 dB up to 40 GHz
- High Isolation 58 dB at 10 GHz
- RoHS* Compliant

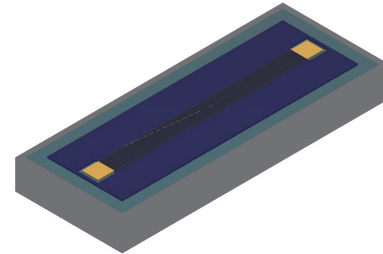

Description

The MMSPN050-C53 is a broadband medium power PIN diode designed as a 50 Ω microstrip when biased at zero or a negative voltage. This device is usable up to 40 GHz.

Electrical Specifications: $T_C = +25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Breakdown Voltage	$I_R = 10 \mu\text{A}$	V	200	—	—
Series Resistance	$I_F = 100 \text{ mA}$, 500 MHz	Ω	—	0.6	—
Minority Carrier Lifetime	$I_F = 10 \text{ mA}$, $I_R = 6 \text{ mA}$, 10% / 90%	ns	—	4000	—
Insertion Loss	$V_R = -50 \text{ V}$, 10 GHz $V_R = -50 \text{ V}$, <40 GHz	dB	—	0.15 0.20	0.30 0.40
Input Return Loss	10 GHz <40 GHz	dB	20 —	25 15	—
Isolation	$I_F = 40 \text{ mA}$, 10 GHz, $I_F = 40 \text{ mA}$, 5 - 40 GHz	dB	50 —	55 50	—

Absolute Maximum Ratings

Parameter	Absolute Maximum
Reverse Voltage	200 V
Forward Current	500 mA
Thermal Resistance	65°C/W
Junction Temperature	+150°C
Storage Temperature	-65°C to +125°C
Assembly Temperature	+260°C, per JEDEC STD-J-20C

Ordering Information

Part Number	Package
MMSPN050-C53	bulk

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

1


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
<https://www.macom.com/support>


DC-0017572

Typical Performance Curves: $T_A = +25^\circ\text{C}$, $Z_O = 50 \Omega$, -10 dBm Small Signal


Insertion Loss

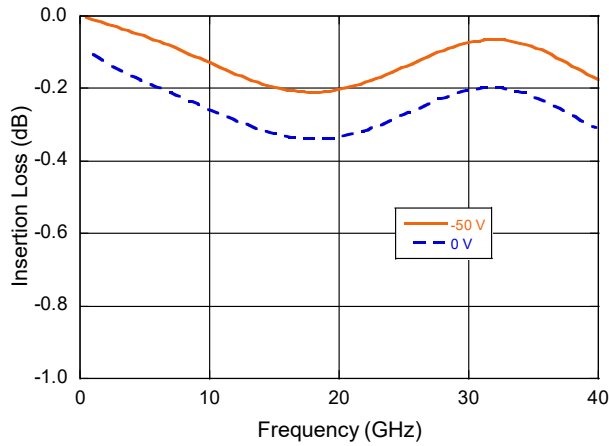


Isolation

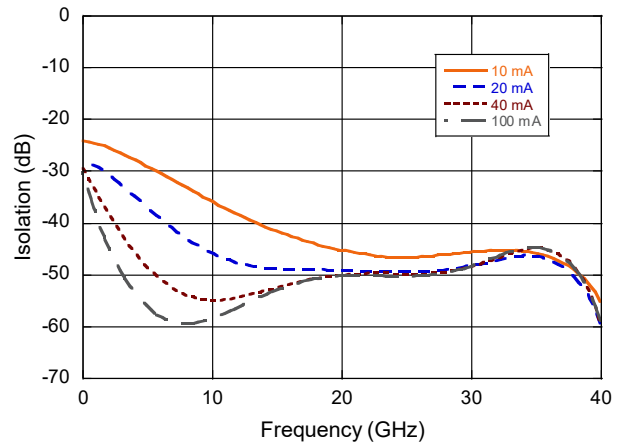


Input Return Loss

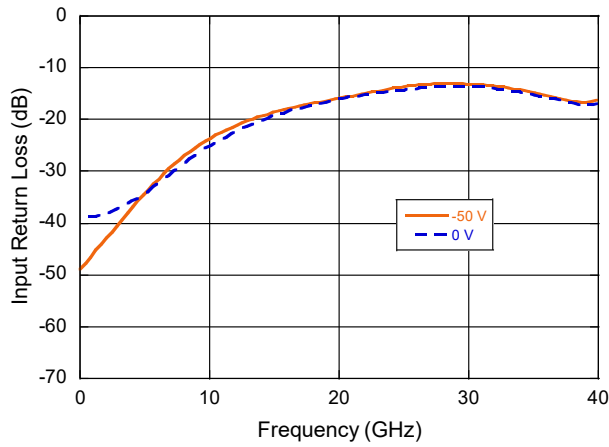


Resistance vs. Current @ 500 MHz

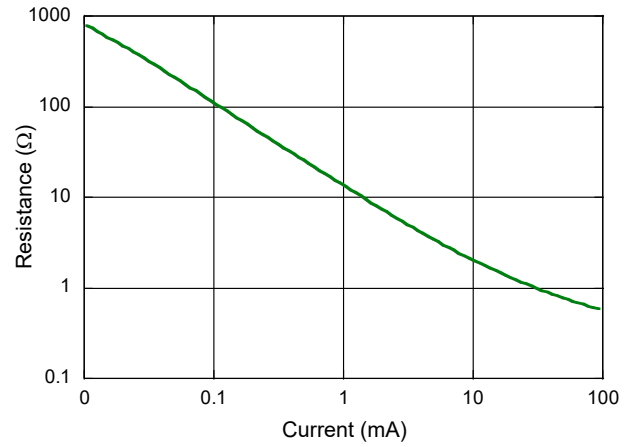


Recommended Assembly for Best Thermals

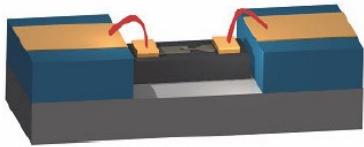

Electrical Schematic



Outline Drawing (C53)

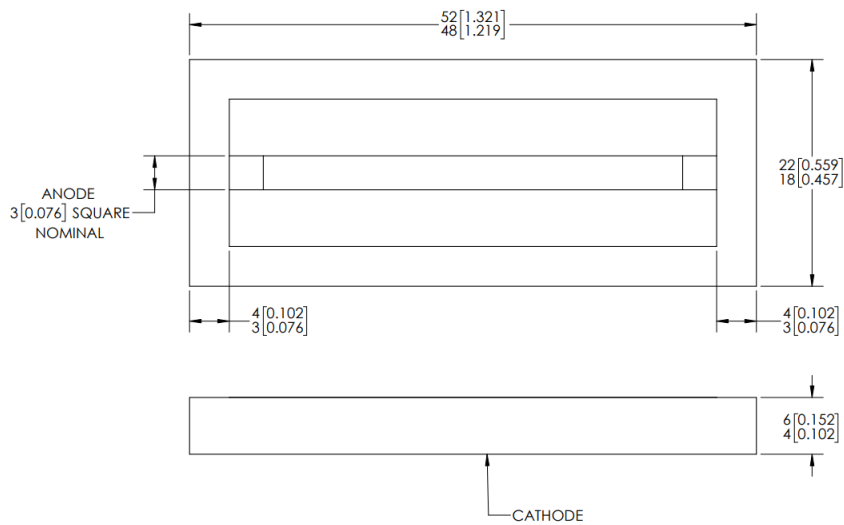

DIMENSIONS IN MILS [MM]

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.