

Flatpack Four-Way Power Divider, 0.2 - 300 MHz

Rev. V4


Features

- Insertion Loss: 0.5 dB Typical
 VSWR: 1.1:1 Typical Miband
 Impedance: 50 Ohms Nominal
- Maximum Power Rating or Input Power: 1 Watt Max.
- Internal Load Dissipation: 50 Watts Max.
- MIL-STD-883 Screening Available

Description

A Power Divider is ideally a lossless reciprocal device which can also perform vector summation of two or more signals and thus is sometimes called a power combiner or summer.

FP-5

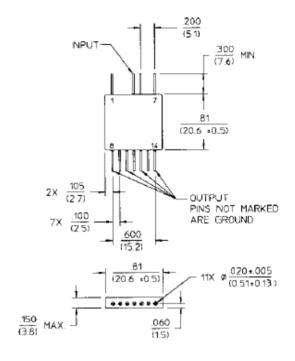

Dimensions in 0 are in mm. Unless Otherwise Noted: XXX = ±0.010 (XX = ±0.25) \times XX = ±0.02 (X = ±0.5) WEIGHT (APPROX): 0.21 OUNCES = 6 GRAMS

Ordering Information

Part Number	Package	
DS-310 PIN	FP-5	

Pin Configuration

Pin No.	Function	Pin No.	Function	
1	GND	8	Output	
2	None	9	GND	
3	None	10	Output	
4	Input	11	GND	
5	GND	12	Output	
6	None	13	GND	
7	GND	14	Output	



Flatpack Four-Way Power Divider, 0.2 - 300 MHz

Rev. V4

Electrical Specifications¹: T_A = -55°C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	Less Coupling	0.3 - 0.5 MHz 0.5 - 100 MHz 100 - 300 MHz	dB dB dB			1.0 0.5 1.0
Isolation	_	0.3 - 0.5 MHz 0.5 - 100 MHz 100 - 300 MHz	dB dB dB	20 25 15		_ _ _
Amplitude Balance	_	0.3 - 0.5 MHz 0.5 - 100 MHz 100 - 300 MHz	dB dB dB		_ _ _	0.2 0.2 0.4
Phase Balance	_	0.3 - 0.5 MHz 0.5 - 100 MHz 100 - 300 MHz	0			1.5 4.0 6.0
VSWR	All Ports	0.3 - 0.5 MHz 0.5 - 100 MHz 100 - 300 MHz	Ratio Ratio Ratio			2.0:1 1.3:1 1.4:1

^{1.} All specifications apply with 50 ohm source and load impedance. This product contains elements protected by United States Patent Number 3,428,920.



Flatpack Four-Way Power Divider, 0.2 - 300 MHz


Rev. V4

Typical Performance Curves

Insertion Loss


Insertion Loss 1.0 0.8 0.8 0.0 0.1 0.2 0.5 1 2 5 10 20 50 100 400 Frequency (MHz)

Isolation



VSWR

VSWR



DS-310



Flatpack Four-Way Power Divider, 0.2 - 300 MHz

Rev. V4

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.