

## Low-Voltage / High Q Si Hyperabrupt Varactors

Rev. V5

#### **Features**

- Surface Mount Packages (SOT-23, SC70 3LD, SOD-323)
- High Q at Low Voltages
- High Capacitance Ratio at Low Voltages
- SPC Process for Superior C-V Repeatability
- Available as Single and Common Cathode Pairs Tape and Reel Packaging
- **Designed for Commercial Wireless Applications**
- Lead-Free (RoHS Compliant) equivalents available with 260°C reflow compatibility

### **Description**

M/A-COM's MA4ST200 series is a ion-implanted, hyperabrupt junction, silicon tuning varactors in SOT-23, SC70 3LD, and SOD- 323 surface mount packages. This series of varactors is designed for high Q and low voltage operation. Each varactor type has a Q greater than 400 at -2 V. These diodes are offered with standard Sn/Pb plating, as well as 100% matte Sn plating on our RoHS compliant equivalent devices.

## **Applications**

The MA4ST200 series tuning varactors are useful for wide band tuning and low phase noise applications where the supply voltage is limited to 5 volts or less. These varactors have been specifically designed for use in the wireless communications up to the 2.4 GHz band. Applications include VCOs and voltage tuned filters.

## **RoHS Compliant Parts**

Commitment to produce in volume is not guaranteed.


Part Number	RoHS Compliant Base Part Number
MA4ST230	MAVR-000230
MA4ST240	MAVR-000240
MA4ST250	MAVR-000250

## Absolute Maximum Ratings<sup>1,2</sup> @ T<sub>A</sub>=+25 °C (Unless Otherwise Noted)


Parameter	Absolute Maximum
Reverse Voltage	12 V
Forward Current	50 mA
Total Power Dissipation	250 mW
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C

- 1. Operation of this device above any one of these parameters may cause permanent damage.
- 2. Please refer to application note M538 for surface mounting instructions

## Typical Device Selection by Frequency

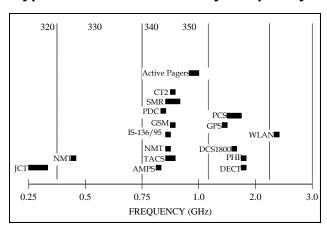

## **Configurations**

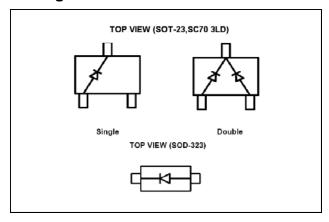

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588

# MA4ST200 Series



## Low-Voltage / High Q Si Hyperabrupt Varactors

Rev. V5


## Electrical Specifications @ $T_A = +25$ °C

Breakdown Voltage @  $I_R = 10\mu A$ ,  $V_b = 12$  V Minimum Reverse Leakage Current @  $V_R = 10V$ ,  $I_R = 100$  nA Maximum

	RoHS Compliant Part Number Base <sup>3</sup>	C <sub>T</sub> <sup>4</sup>			Capacitance Ratio	Q Factor	
Part Number Base		(pF)		(pF)			
		f = 1 MHz, V <sub>R</sub> = 2.0 V		f = 1 MHz V <sub>R</sub> = 4.0 V	C <sub>T0.5</sub> /C <sub>T4.0</sub>	f = 50 MHz V <sub>R</sub> = 2.0 V	
		Min.	Nom.	Max.	Max.	Тур.	Min.
MA4ST230	MAVR-000230-XXXXXX	4.5	5.0	6.0	3.1	3.5	400
MA4ST240	MAVR-000240-XXXXXX	3.0	3.5	4.2	2.3	3.5	450
MA4ST250	MAVR-000250-XXXXXX	2.3	2.7	3.5	1.8	3.5	450

<sup>3.</sup> The suffix defines package style, configuration and packaging information. Contact representative for complete part identification. Example: The MA4ST250-1141T RoHS compliant version is MAVR-000250-11410T.

## **Spice Model**

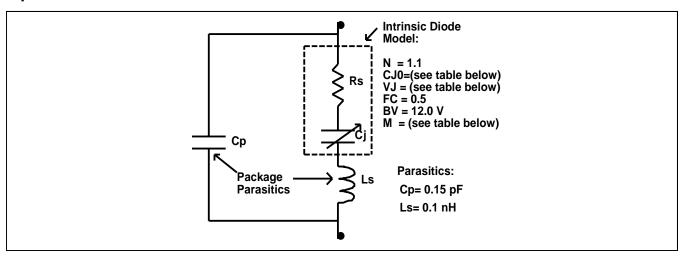

Part No.	RoHS Compliant Base Part No.	CJ0 (pF)	A1 (A)	М
MA4ST230	MAVR-000230	12.0	4.085	2.228
MA4ST240	MAVR-000240	8.16	4.930	2.520
MA4ST250	MAVR-000250	6.19	4.774	2.458

<sup>4.</sup> Capacitance @ 1 MHz

<sup>•</sup> India Tel: +91.80.4155721




## Low-Voltage / High Q Si Hyperabrupt Varactors


Rev. V5

## **Typical Performance Curves**


#### TOTAL CAPACITANCE vs REVERSE VOLTAGE at 1 MHz

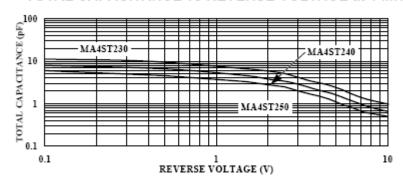

#### NOMINAL Q at 50 MHz vs REVERSE VOLTAGE

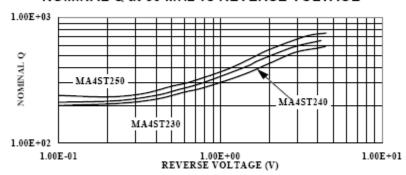

#### NOMINAL CHANGE in CAPACITANCE with TEMPERATURE

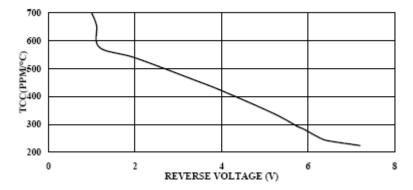

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721 Visit www.macomtech.com for additional data sheets and product information.
- China Tel: +86.21.2407.1588




## Low-Voltage / High Q Si Hyperabrupt Varactors

Rev. V5


## **Case Styles**

## **SOD-323 (Case Style 1141)**

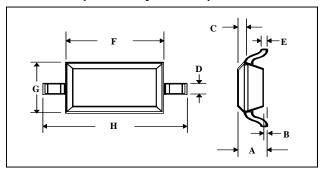


	INCHES		MILLIM	ETERS
DIM.	MIN. MAX.		MIN.	MAX.
Α	_	0.043	_	1.1
В	_	0.004	_	0.1
С	_	0.008	_	0.2
D	0.010	0.016	0.25	0.41
Е	0.003	0.006	0.07	0.15
F	0.063	0.075	1.6	1.9
G	0.045	0.057	1.14	1.45
Н	0.091	0.106	2.3	2.7

## SC-70, 3 Lead (Case Style 1146)

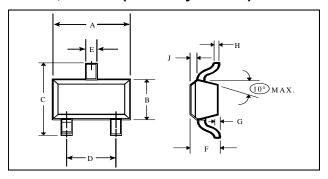

	INCHES		MILLIMETERS	
DIM.	MIN.	MAX.	MIN.	MAX.
Α	0.071	0.087	1.80	2.21
В	0.045	0.053	1.14	1.35
С	0.071	0.094	1.80	2.39
D	0.047	0.057	1.19	1.45
E	0.010	0.016	0.25	0.41
F	0.031	0.039	0.79	1.00
G	0.000	0.004	0.00	0.10
Н	0.004	0.007	0.10	0.18
J	0.004	0.010	0.10	0.25

### **SC-79 (Case Style 1279)**

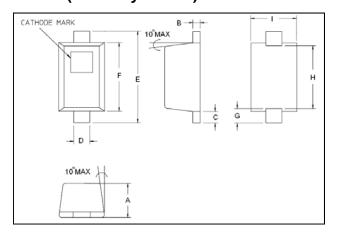

	INC	HES	MILLIMETERS	
DIM.	MIN.	MAX.	MIN.	MAX.
Α	.0197	.0276	0.50	0.70
В	0.003	0.008	0.07	0.20
С	0.006	0.006 0.010		0.25
D	0.010	0.010 0.014		0.35
Е	0.059	0.067	1.50	1.70
F	0.043	0.051	1.09	1.30
G	.0098 r	nominal	0.250 nominal	
Н	.0433 nominal		1.10 nominal	
I	.027	.035	0.68	0.89

Visit www.macomtech.com for additional data sheets and product information.

# MA4ST200 Series



## Low-Voltage / High Q Si Hyperabrupt Varactors

Rev. V5

## **Mounting Information**

The illustration indicates the recommended mounting pad configuration for the SC-79, SC70 3LD and SOD-323 packages. Solder paste containing flux should be screened onto the pads to a thickness of 0.005- 0.007 inches. The plastic package is placed in position, firmly adhering to the solder paste.

Permanent attachment is performed by a reflow soldering procedure during which the tab temperature does not exceed +275 °C and the body temperature does not exceed +250 °C, for standard models and +260 °C for the RoHS compliant devices.

These varactors are available in the three case styles shown. When ordering, specify the desired case style by adding the case designation (287 for SOT-23, 1146 for SC70 3LD, 1141 for SOD-323) as a suffix to the model number. For example, MA4ST230-1141 specifies the MA4ST230 varactor in the SOD-323 package. The model number indicated is for a single varactor. Common cathode pairs are available in SOT-23 package, and are specified by adding "CK" to the end of the model number. For example MA4ST230CK-287 specifies the MA4ST230 varactor in common cathode pairs.


For RoHS Compliant Parts, use the Following Suffices for the Given Package Style ( After the Base P/N ):

SC-79: 12790T SOD-323: 11410T SC70 3LD: 1146FT


As example, the RoHS P/N for the Base P/N MAVR-000230 in SOD-323 is : MAVR-000230-1146FT.

Please refer to Application Note M538 for surface mounting instructions.

## SC-79 (Case Style 1279)

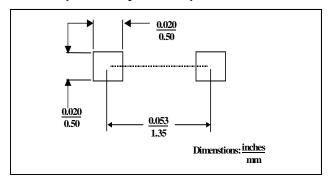

### **SOD-323 (Case Style 1141)**

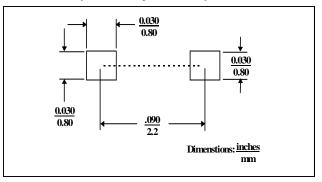

### SC-70, 3 Lead (Case Style 1146)

