# MABA-010655-CF1A40



#### 1:1 10/10Base-T Ethernet Transformer

### 1 - 100 MHz

#### **Features**

- Surface Mount
- 1:1 Impedance
- Suited for both R<sub>x</sub> & T<sub>x</sub> Channel
- Available on Tape and Reel
- RoHS Compliant and Pb Free
- 260°C Reflow Compatible


#### **Description**

The MABA-010655-CF1A40 is a 10/100BASE-T Ethernet Transformersurface mount package.

Ideally suited for CATV Broadband applications.



#### **Functional Schematic**

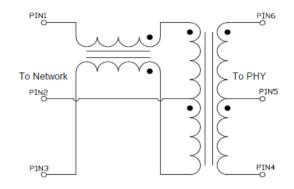

#### **Pin Configuration**

Pin No.	Function
1	Primary Dot
2, 5	Ground
3	Primary
4	Secondary
6	Secondary Dot

### Electrical Specifications: Freq. = 50 - 1200 MHz, $T_A = 25^{\circ}C$ , $Z_0 = 50 \Omega$ , $P_{in} = 0 \text{ dBm}$

Parameter	Conditions	Units	Min.	Тур.	Max.
Impedance Ratio	_	ratio	_	1:1	_
Insertion Loss	1 - 3 MHz 3 - 10 MHz 10 - 65 MHz 65 - 100 MHz	dB	-0.25 -0.50 -0.50 -0.60	-0.20 -0.20 -0.30 -0.43	_
Return Loss	1 - 100 MHz	dB	_	-30	-20
Differential to Common Mode Rejection	1 - 100 MHz	dB	_	-37	-35
DC Resistance Balance	_	%	_	1.5	3.5

# **Ordering Information**

Part Number	Description
MABA-010655-CF1A40	900 piece reel
MABA-010655-CF1ATB	sample board

## **Absolute Maximum Ratings**

Parameter	Absolute Maximum
Input RF Power	250 mW
DC Current	600 mA
Operating Temperature	-40°C to +110°C
Storage Temperature	-55°C to +100°C

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit <a href="https://www.macom.com">www.macom.com</a> for additional data sheets and product information.

I

# MABA-010655-CF1A40




## 1:1 10/10Base-T Ethernet Transformer

1 - 100 MHz


**V**4

Typical Performance Curves:  $T_A = 25^{\circ}C$ ,  $Z_0 = 50 \Omega$ ,  $P_{IN} = 0 \text{ dBm}$ 


#### **Insertion Loss**

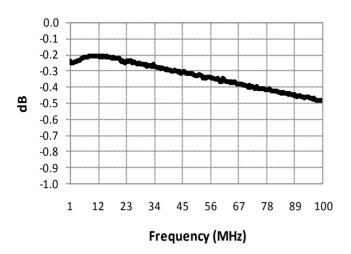


#### **Input Return Loss**

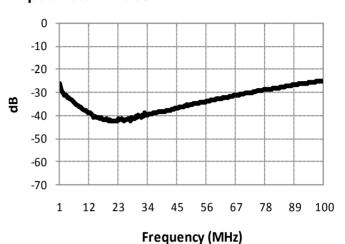

### **Differential to Common Mode Rejection**

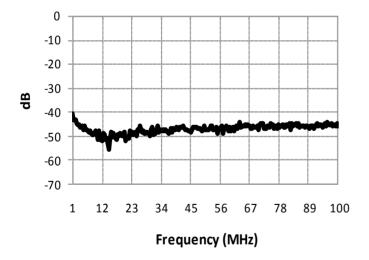

### **Output Return Loss**

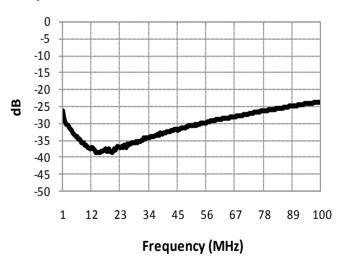

Full temperature plots available on request




## 1:1 10/10Base-T Ethernet Transformer


#### 1 - 100 MHz

V4


## **Application Circuit**

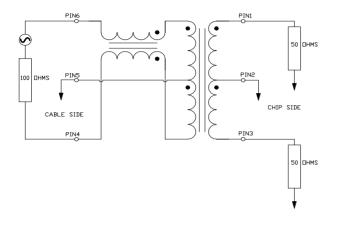

#### **Recommended Board Layout**



#### **Outline Drawing**

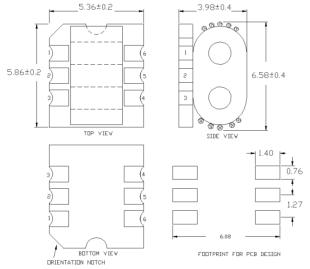

# Dimensions in mm.

Tolerance: ±0.2 mm unless otherwise noted. Model number and lot code printed on reel.

Plating finish: ENIG on both sides, 0.05 to 0.1  $\mu m$  gold over 3 to 6

µm nickel

#### **Tape & Reel Information**

Parameter	Units	Value		
Qty per reel	-	900		
Reel Size	mm	330		
Tape Width	mm	16.00		
Pitch	mm	8.00		
Ao	mm	5.70		
Во	mm	7.00		
Ko	mm	4.20		
Orientation	-	F46		
D (				

Reference Application Note ANI-019 for orientation

# MABA-010655-CF1A40



1:1 10/10Base-T Ethernet Transformer

1 - 100 MHz V4

#### MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

4