# MY51 / MY51C



### **Triple-Balanced Mixer**

Rev. V3

### **Features**

- LO 2.0 TO 24 GHz
- RF 2.0 TO 24 GHz
- IF 1.0 TO 15 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- HIGH COMPRESSION POINT


### **Description**

MY51 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

# **Ordering Information**

Part Number	Package		
MY51	Versapac		
MY51C	SMA Connectorized		

### Product Image

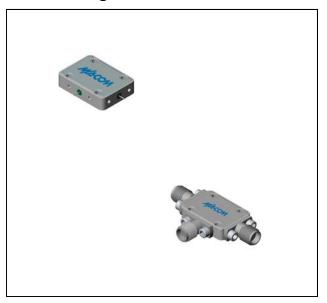

# Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter Application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
Parameter				+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Fig- ure (max)	fR = 2.5 to 18 GHz, fL = 2 to 18 GHz, fI = 2 to 10 GHz fR = 2 to 18 GHz, fL = 2 to 24 GHz, fI = 1 to 12 GHz fR = 2 to 24 GHz, fL = 2 to 24 GHz, fI = 1 to 15 GHz	dB dB dB	7.5 8.0 9.0	9.5 10.5 11.5	10.0 11.0 12.0
Isolation, L to R (min)	fL = 2 to 3 GHz fL = 3 to 24 GHz	dB dB	20 30	15 20	13 18
Isolation, L to I (min)	fL = 2 to 7 GHz fL = 7 to 24 GHz	dB dB	22 30	15 20	13 18
1 dB Conversion Comp.	fL = +10 dBm	dBm	+5		
Input IP3	fR1 = 5 GHz at -6 dBm, fR2 = 5.01 GHz at -6 dBm, fL = 8 GHz at +10 dBm fR1 = 16 GHz at -6 dBm, fR2 = 16.01 GHz at -6 dBm, fL =18 GHz at +10 dBm	dBm dBm	+15 +15		

• India Tel: +91.80.4155721 Visit www.macomtech.com for additional data sheets and product information.





### **Triple-Balanced Mixer**


Rev. V3

### **Typical Performance Curves**


#### Conversion Loss vs. Frequency LO @ +10 dBm

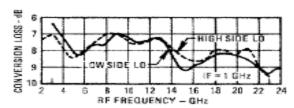


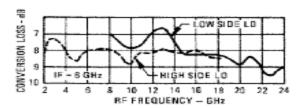

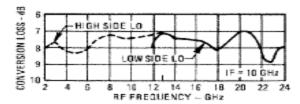



#### I-Port VSWR

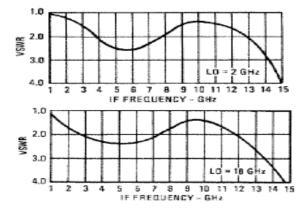


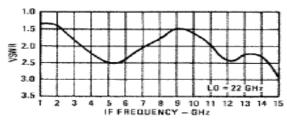


#### L-Port VSWR

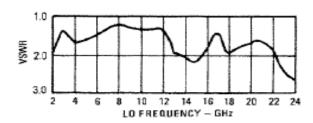








#### R-Port VSWR





#### R-Port VSWR LO @ +10 dBm





Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- China Tel: +86.21.2407.1588 • India Tel: +91.80.4155721 Visit www.macomtech.com for additional data sheets and product information.




# **Triple-Balanced Mixer**

Rev. V3


### **Absolute Maximum Ratings**

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+26 dBm max @ +25°C +22 dBm max @ +100°C		


### Drive Level

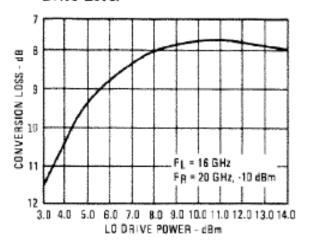


### Isolation vs. Frequency

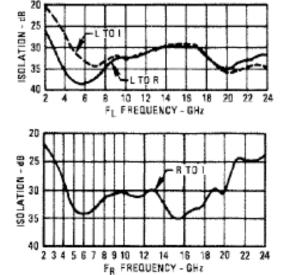

### Outline Drawing: Versapac \*

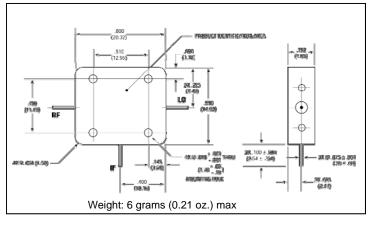

# Outline Drawing: SMA Connectorized

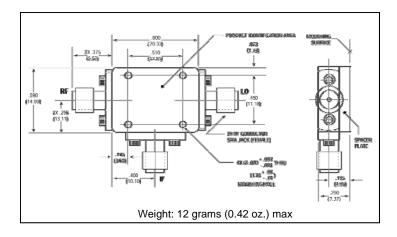

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

Commitment to produce in volume is not guaranteed.

North America Tel: 800.366.2266
India Tel: +91.80.4155721
China Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.