

# PTVA035002EV


## Thermally-Enhanced High Power RF LDMOS FET 500 W, 50 V, 390 – 450 MHz

### Description

The PTVA035002EV LDMOS FET is designed for use in power amplifier applications in the 390 MHz to 450 MHz frequency band. Features include high gain and thermally-enhanced package with bolt-down flange. Manufactured with an advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTVA035002EV  
Package H-36275-4

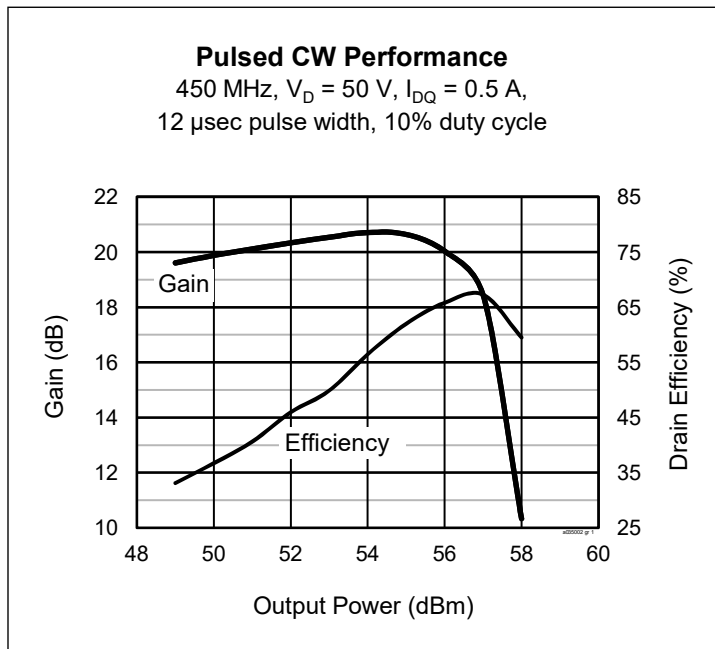

### Features

- Unmatched input and output
- High gain and efficiency
- Integrated ESD protection
- Human Body Model Class 2 (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS-compliant
- Capable of withstanding a 13:1 load mismatch at 57 dBm under pulsed conditions: 12  $\mu\text{sec}$  pulse width, 10% duty cycle

### RF Characteristics

**Pulsed CW Class AB Characteristics** (not subject to production test, verified by design/characterization in the test fixture)  
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 0.5\text{ A}$ ,  $P_{OUT} = 500\text{ W}$ ,  $f = 450\text{ MHz}$ , 12  $\mu\text{sec}$  pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	—	18	—	dB
Drain Efficiency	$\eta_D$	—	64	—	%

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## RF Characteristics

### Pulsed CW Characteristics (tested in the test fixture)

$V_{DD} = 50\text{ V}$ ,  $V_{GS} = 2.9\text{ V}$ ,  $I_{DQ} = 0.0\text{ A}$ ,  $P_{OUT} = 500\text{ W}$ ,  $f = 450\text{ MHz}$ ,  $12\ \mu\text{sec}$  pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	14.75	15.5	—	dB
Drain Efficiency	$\rho_D$	63	66	—	%

### DC Characteristics (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1.0	$\mu\text{A}$
	$V_{DS} = 105\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10.0	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.1	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 50\text{ V}$ , $I_{DQ} = 600\text{ mA}$	$V_{GS}$	—	3.70	—	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1.0	$\mu\text{A}$





## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Operating Voltage	$V_{DD}$	0 to +55	V
Junction Temperature	$T_J$	225	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}$ , 300 W CW)	$R_{\theta JC}$	0.20	$^{\circ}\text{C/W}$


## Ordering Information

Type and Version	Order Code	Package Description	Shipping
PTVA035002EV V1 R0	PTVA035002EV-V1-R0	H-36275-4, bolt-down	Tape & Reel, 50pcs
PTVA035002EV V1 R250	PTVA035002EV-V1-R250	H-36275-4, bolt-down	Tape & Reel, 250pcs

**Typical Performance** (data taken in production test fixture)

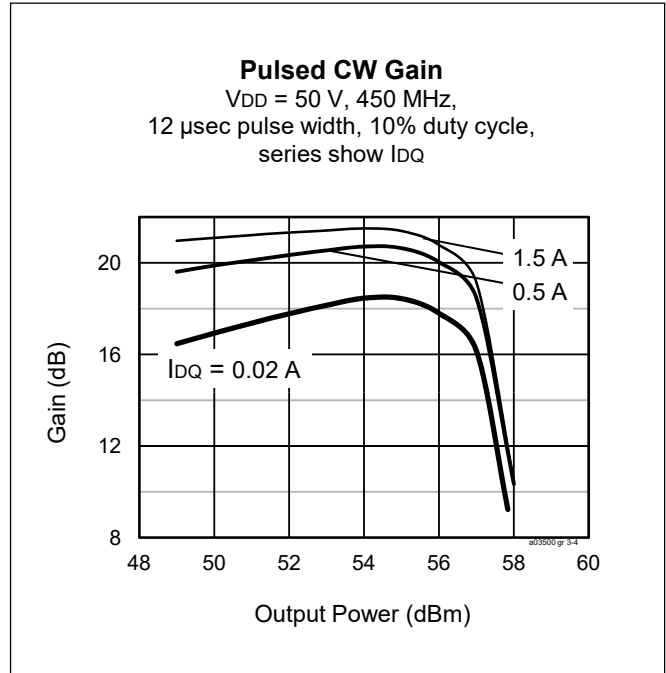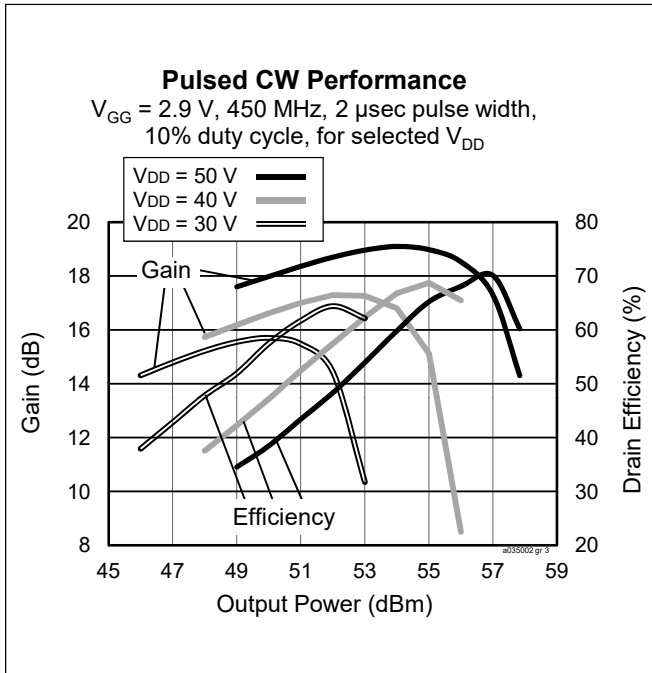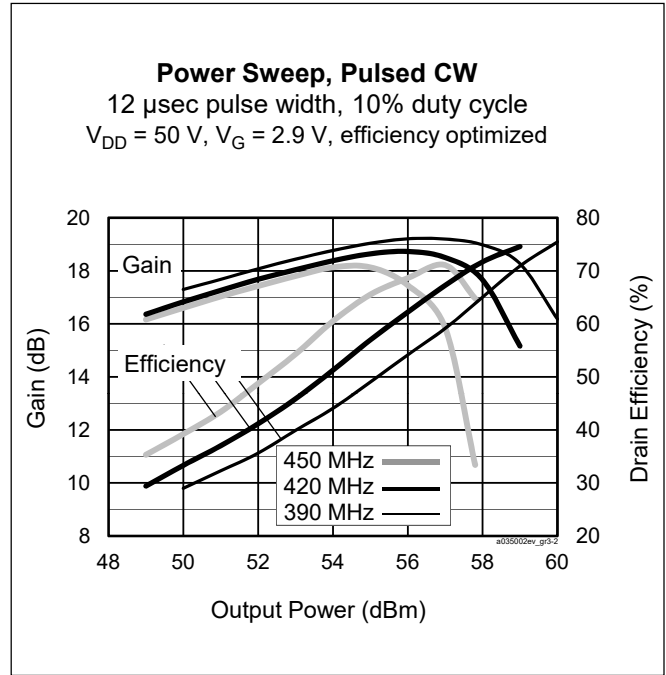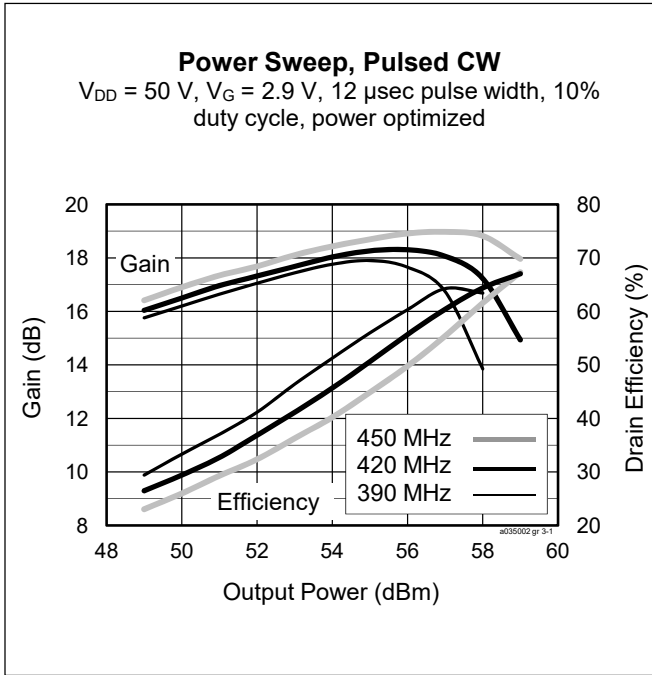


**Typical Performance** (cont.)

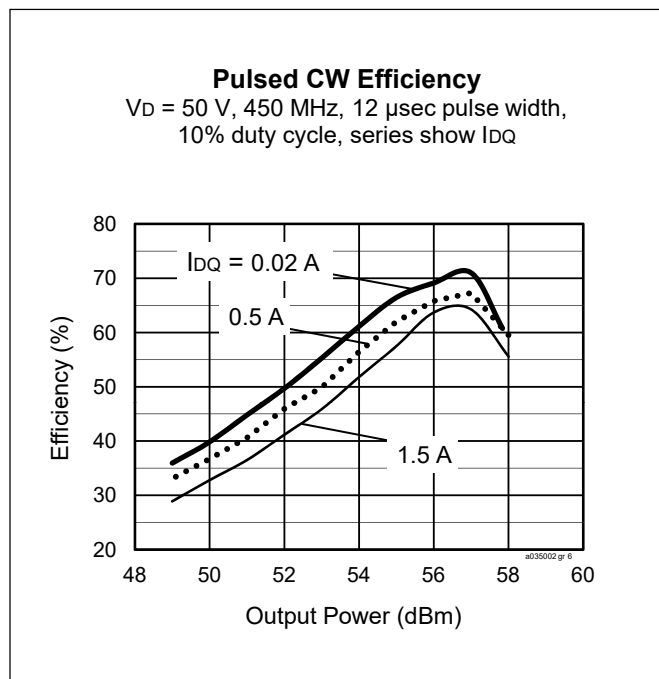


**Broadband Circuit Impedance**

Frequency MHz	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
390	1.28	-0.12	1.80	-2.22
405	1.35	0.18	1.86	-1.91
420	1.43	0.48	1.92	-1.62
435	1.54	0.76	1.98	-1.35
450	1.67	1.04	2.02	-1.11

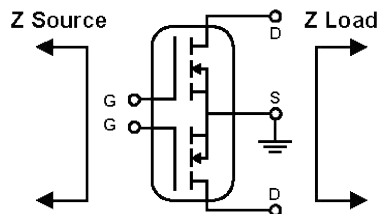

## Reference Circuit, 390 – 450 MHz

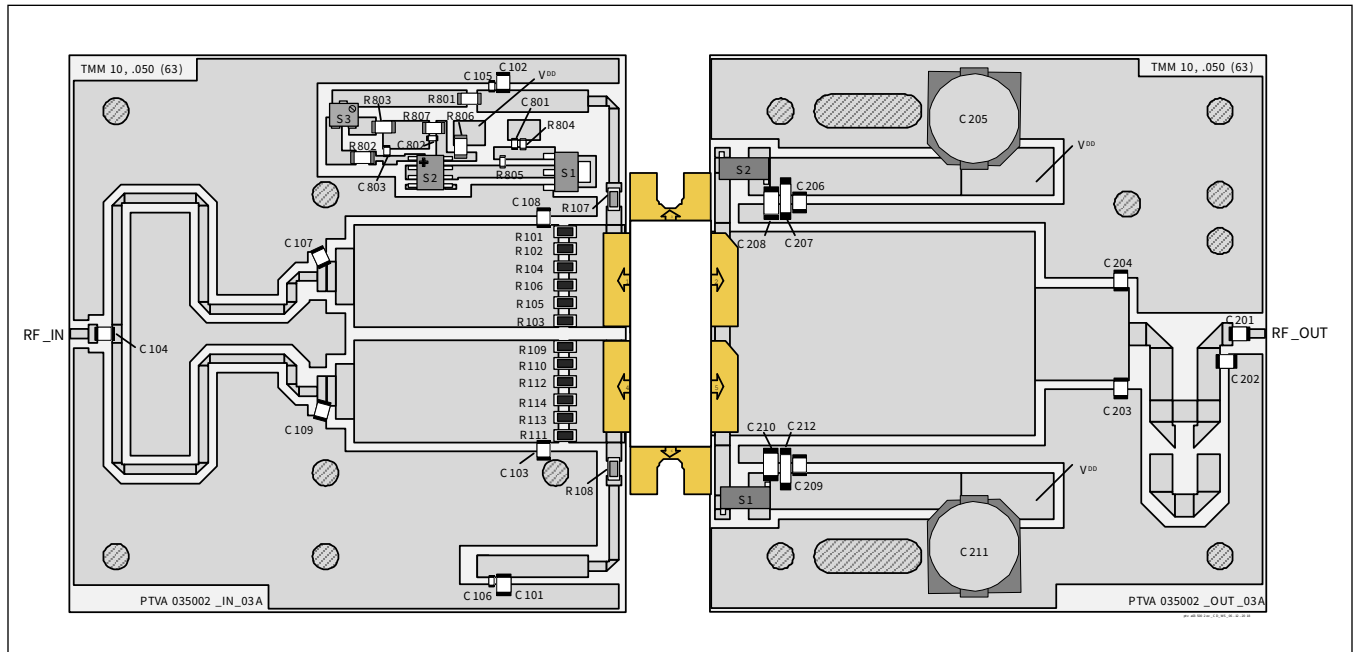

Reference circuit assembly diagram (not to scale)\*

## Reference Circuit (cont.)


### Reference Circuit Assembly

DUT	PTVA035002EV
Test Fixture Part No.	LTN/PTVA035002EV
PCB	Rogers TMM10, 1.27 mm [0.050"] thick, 2 oz. copper, $\epsilon_r = 9.2$

### Components Information

Component	Description	Suggested Manufacturer	P/N
<b>Input</b>			
C101, C102, C104	Capacitor, 300 pF	ATC	ATC100B301KW200X
C103, C108	Capacitor, 20 pF	ATC	ATC100B200KW500X
C105, C106, C801, C802, C803	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
C107, C109	Capacitor, 6.2 pF	ATC	ATC100B6R2CT500X
R101, R102, R103, R104, R105, R106, R109, R110, R111, R112, R113, R114	Resistor, 5.6 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ5R6V
R107, R108	Resistor, 1000 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ102V
R801	Resistor, 100 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ101V
R802	Resistor, 2000 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ202V
R803	Resistor, 3600 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ362V
R804	Resistor, 1300 $\Omega$	Panasonic Electronic Components	ERJ-3GEYJ132V
R805	Resistor, 1200 $\Omega$	Panasonic Electronic Components	ERJ-3GEYJ122V
R806	Resistor, 2400 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ242V
R807	Resistor, 6200 $\Omega$	Panasonic Electronic Components	ERJ-8GEYJ622V
S1	Transistor	Infineon Technologies	BCP56
S2	Voltage regulator	Texas Instruments	LM7805
S3	Potentiometer	Bourns Inc.	3224W-1-202E
<b>Output</b>			
C201, C206, C209	Capacitor, 300 pF	ATC	ATC100B301KW200X
C202	Capacitor, 3 pF	ATC	ATC100B3R0CW500X
C203, C204	Capacitor, 4.3 pF	ATC	ATC100B4R3CW500X
C205, C211	Capacitor, 100 $\mu$ F	United Chemi-Con	EMVE101ARA101MKE0S
C207, C212	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X7S2A106M230KB
C208, C210	Capacitor, 2.2 $\mu$ F	TDK Corporation	C4532X7R2A225K230KA
S1, S2	Inductor, 17.5 nH	Coilcraft	B06TGLB

## Package Outline Specifications

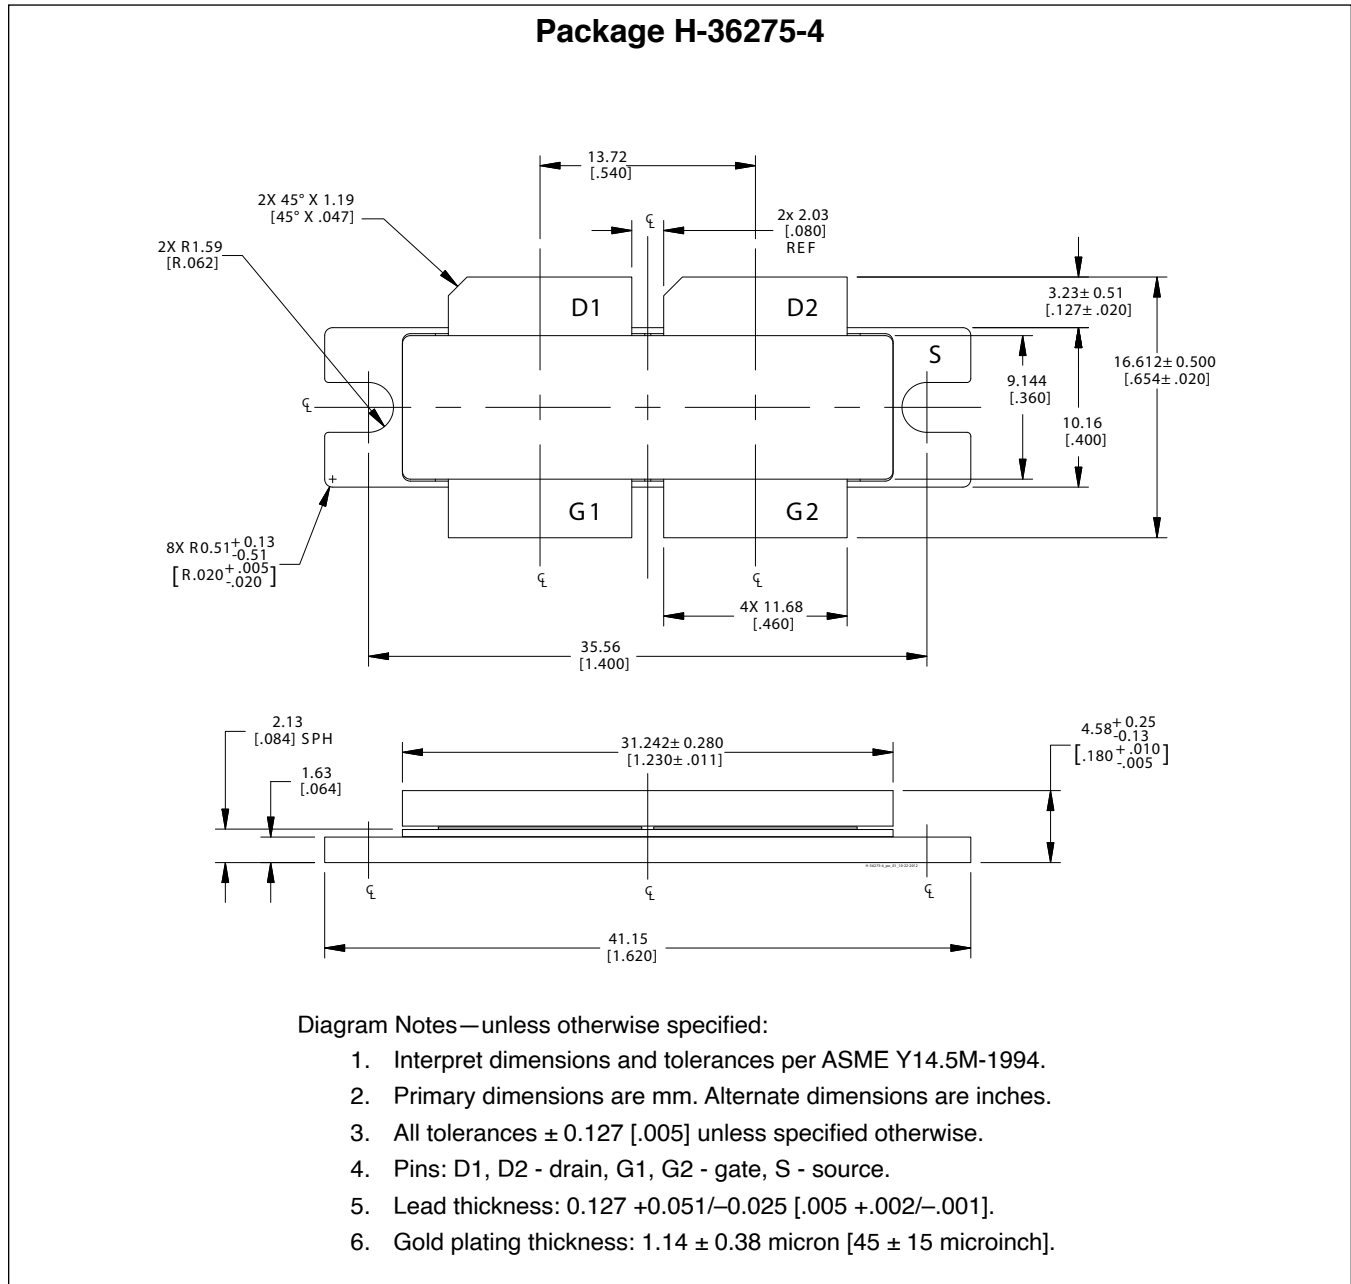

## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2010-10-07	Advance	All	Data Sheet reflects advance specification for product development
02	2010-12-09	Advance	1, 2	Added ESD and VSWR information and revised conditions of test, Revise conditions of test.
03	2011-04-28	Preliminary	All	Convert to Preliminary Data Sheet, adding performance graphs, substantiating some characterizations.
04	2012-02-24	Production	All 4 – 9	Convert to final Data Sheet for production-released product. Add impedance data, Add reference circuit
05.1	2016-04-19	Production	1, 2	Added ESD rating, updated ordering information
05.2	2016-06-08	Production	2	Updated ordering information to include R250
05.3	2017-02-02	Production	2	Added operating voltage and updated junction temperature
06	2018-06-12	Production	All	Converted to the Data Sheet



## Notes & Disclaimer

---

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.